

# IMPORTANT SAFETY AND INSTALLATION INSTRUCTIONS


**WARNING:** Risk of fire and electrical shock. This product is to be installed by a qualified electrician only.

**CAUTION:** When using electrical equipment, basic safety precautions should always be followed including the following: Read all instructions carefully before installation and save

for future use. Make sure installation and all connections are in accordance with National Electrical Code and any local regulations. To avoid possible electrical shock, be sure that power supply is turned off before installing or servicing this fixture. Servicing should be performed by qualified service personnel.

These instructions do not claim to cover all details or variations. When additional information is desired, please contact your SPI representative.

## ECHO™ YOKE MOUNT

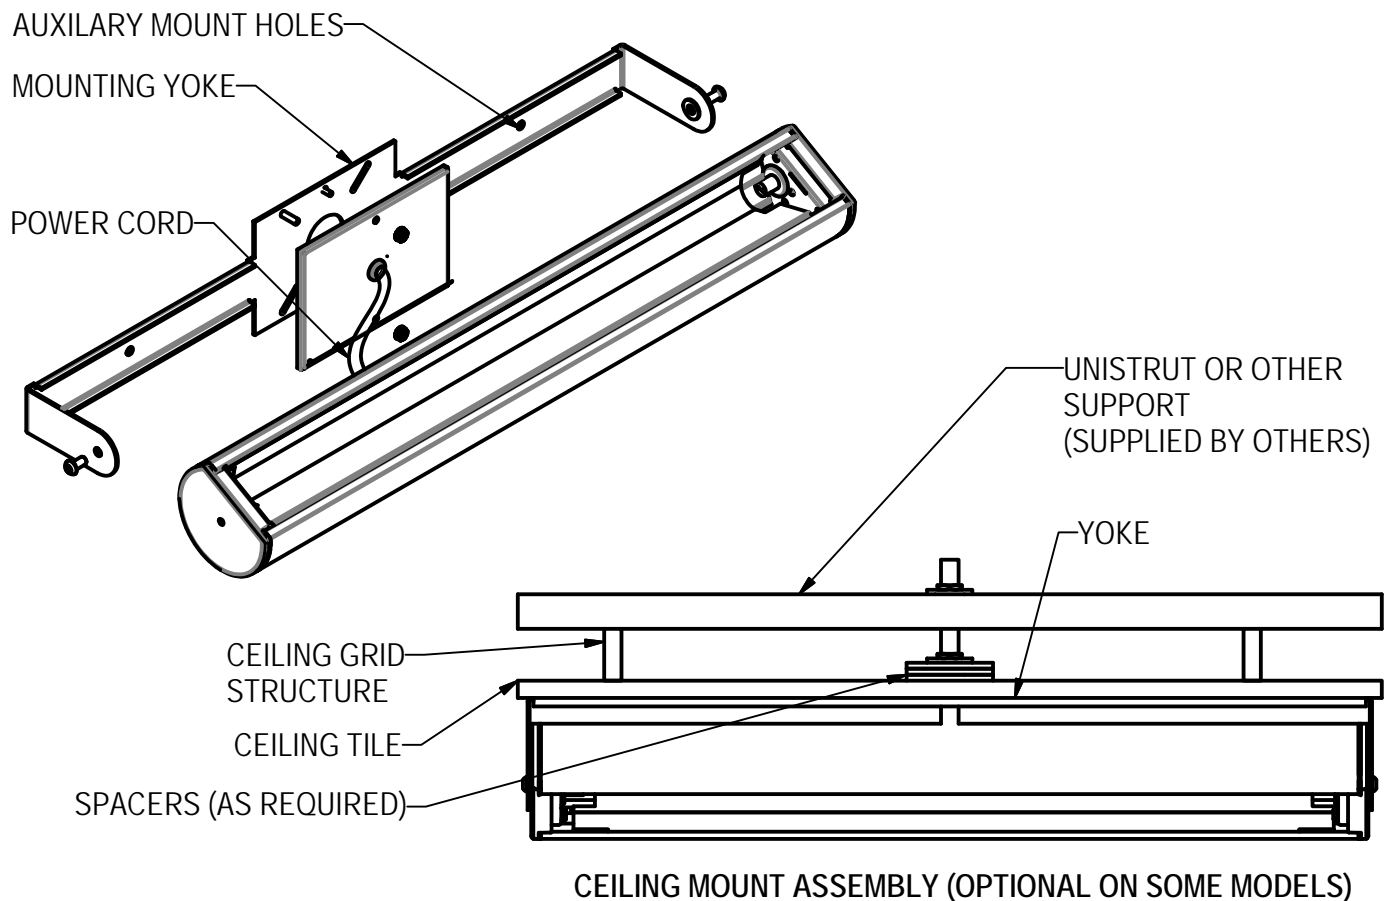

1. REMOVE FIXTURE FROM YOKE BY REMOVING SCREW FROM EACH END.
2. MOUNT YOKE TO J-BOX WITH HARDWARE (BY OTHERS) AND TO MOUNT SURFACE THROUGH AUXILIARY MOUNT HOLES AS REQUIRED AND LEVEL. **CM MOUNT:** ATTACH MOUNTING YOKE ABOVE CEILING GRID WITH FACE OF YOKE FLUSH AND TIGHT TO CEILING TILE (MEANS SUPPLIED BY OTHERS). USE AUXILIARY MOUNT HOLES AS REQUIRED.
3. MAKE POWER CONNECTIONS PER CODE. **STANDARD YOKE MOUNT:** ATTACH J-BOX COVER TO YOKE AND SECURE WITH NUTS PROVIDED.
4. RE-ATTACH FIXTURE TO YOKE. THERE SHOULD BE A WASHER BETWEEN THE FIXTURE AND THE YOKE.
5. POSITION FIXTURE AT THE DESIRED ANGLE (30° FROM HORIZONTAL OR VERTICAL UNLESS OTHERWISE SPECIFIED) AND LOCK INTO PLACE WITH SCREW AT EACH END.

ECHO™

\*\*\*NOTE: FIXTURE SHAPE MAY  
DIFFER FROM SHAPE SHOWN\*\*\*

11/22/13  
IS44258X

**SPI™** A BRAND OF SPILIGHTING

Tel (262)-242-1420 FAX: (262)-242- 6414

[contact@specspi.com](mailto:contact@specspi.com)