

IMPORTANT SAFETY AND INSTALLATION INSTRUCTIONS

WARNING: Risk of fire and electrical shock. This product is to be installed by a qualified electrician only.

CAUTION: When using electrical equipment, basic safety precautions should always be followed including the following: Read all instructions carefully before installation and save

for future use. Make sure installation and all connections are in accordance with National Electrical Code and any local regulations. To avoid possible electrical shock, be sure that power supply is turned off before installing or servicing this fixture. Servicing should be performed by qualified service personnel.

These instructions do not claim to cover all details or variations. When additional information is desired, please contact your SPI representative.

RECESSED CEILING FIXTURE


NOTE: BLOCKING IS REQUIRED TO SUPPORT FIXTURE

RECTANGULAR CUT-OUT DIMENSIONS

2 FOOT NOMINAL FIXTURES : 23.125" X 5.25"

3 FOOT NOMINAL FIXTURES : 35.125" X 5.25"

4 FOOT NOMINAL FIXTURES : 47.125" X 5.25"

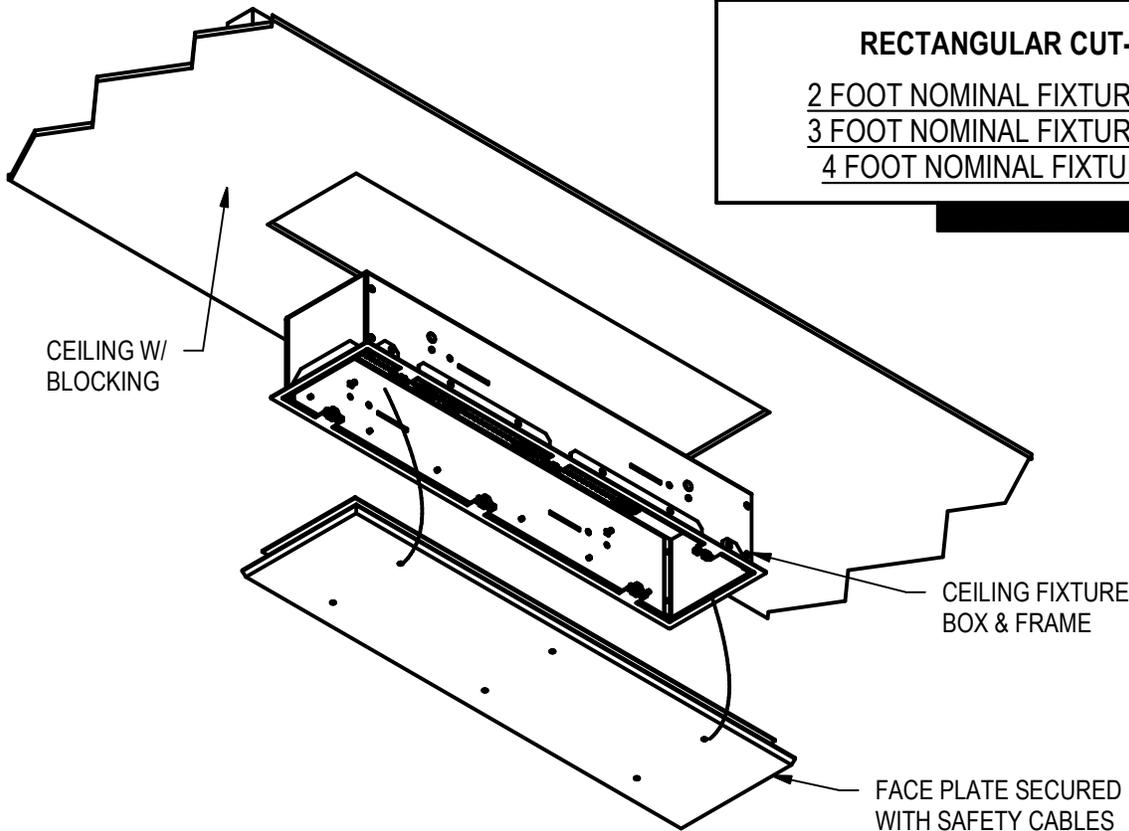

1. TURN POWER OFF
2. REMOVE FACE PLATE FROM HOUSING, (FIRMLY PULL LENS AWAY FROM FIXTURE BOX) FACE PLATE WILL HANG ON SAFETY CABLES. **DO NOT REMOVE OR DISCONNECT SAFETY CABLES!!**
3. CONFIRM WHICH CUT OUT SIZE TO USE (SEE TOP OF PAGE) CUT HOLE IN CEILING
4. MAKE ELECTRICAL CONNECTIONS PER CODE.
5. SLIDE FIXTURE BOX INTO CUT OUT. SECURE FIXTURE TO BLOCKING WITH SCREWS (SCREWS / BLOCKING BY OTHERS) **NOTE: FIXTURE FRAME SHOULD COVER RECTANGULAR CUT-OUT COMPLETELY.**
6. INSTALL LAMP, TURN POWER ON & TEST.
7. RE-SECURE FACE PLATE TO FIXTURE BY LINING UP FACE PLATE STUDS TO FIXTURE MOUNTING CLIPS AND PUSH FIRMLY. **NOTE: SAFETY CABLES SHOULD BE TUCKED INSIDE FIXTURE AWAY FROM LUMINOUS CENTER OF FACE PLATE.**

2/7/20

IS62072X - PAGE 1 OF 2

IMPORTANT SAFETY AND INSTALLATION INSTRUCTIONS


WARNING: Risk of fire and electrical shock. This product is to be installed by a qualified electrician only.

CAUTION: When using electrical equipment, basic safety precautions should always be followed including the following: Read all instructions carefully before installation and save

for future use. Make sure installation and all connections are in accordance with National Electrical Code and any local regulations. To avoid possible electrical shock, be sure that power supply is turned off before installing or servicing this fixture. Servicing should be performed by qualified service personnel.

These instructions do not claim to cover all details or variations. When additional information is desired, please contact your SPI representative.

"CEILING GRID SYSTEM" FIXTURE

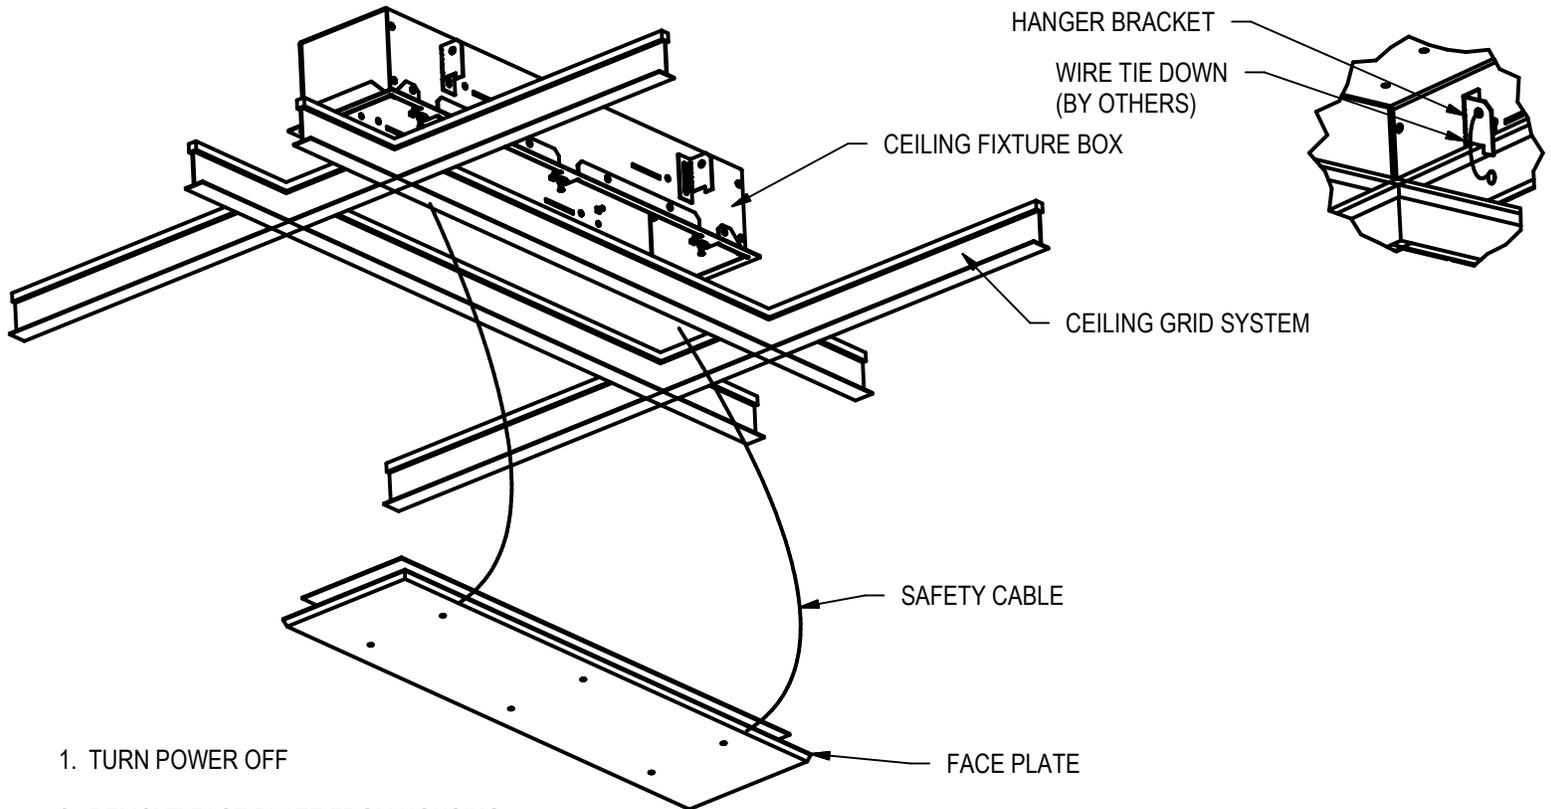

1. TURN POWER OFF
2. REMOVE FACE PLATE FROM HOUSING, (FIRMLY PULL LENS AWAY FROM FIXTURE BOX) FACE PLATE WILL HANG ON SAFETY CABLES.
DO NOT REMOVE OR DISCONNECT SAFETY CABLES!!
3. POSITION FIXTURE BOX IN APPROPRIATE SPACE OF LAY-IN CEILING GRID SYSTEM.
4. BEND HANGER SUPPORT BRACKETS OUTWARD 90° (SEE DETAIL)
5. REST SUPPORT BRACKETS OF FIXTURE HOUSING ON CEILING GRID. BRACKET HEIGHT MAY NEED TO BE ADJUSTED DEPENDING ON GRID SUPPORT HEIGHT.
6. TIGHTLY SECURE FIXTURE TO GRID SYSTEM AS REQUIRED (BY OTHERS).
7. **WEIGHT OF FIXTURE SHOULD NOT REST ON CEILING GRID SYSTEM ALONE** - PROVIDE ADDITIONAL SUPPORT TO STRUCTURE ABOVE. (PROVIDED BY OTHERS)
8. MAKE ELECTRICAL CONNECTIONS PER CODE.
9. INSTALL LAMP, TURN POWER ON & TEST.
10. RE-SECURE FACE PLATE TO FIXTURE BY LINING UP FACE PLATE STUDS TO FIXTURE MOUNTING CLIPS AND PUSH FIRMLY. **NOTE: SAFETY CABLES SHOULD BE TUCKED INSIDE FIXTURE AWAY FROM LUMINOUS CENTER OF FACE PLATE.**

2/7/20

IS62072X - PAGE 2 OF 2