

IMPORTANT SAFETY AND INSTALLATION INSTRUCTIONS


WARNING: Risk of fire and electrical shock. This product is to be installed by a qualified electrician only.

CAUTION: When using electrical equipment, basic safety precautions should always be followed including the following: Read all instructions carefully before installation and save

for future use. Make sure installation and all connections are in accordance with National Electrical Code and any local regulations. To avoid possible electrical shock, be sure that power supply is turned off before installing or servicing this fixture. Servicing should be performed by qualified service personnel.

These instructions do not claim to cover all details or variations. When additional information is desired, please contact your SPI representative.

REO (SEMI) RECESSED MOUNT

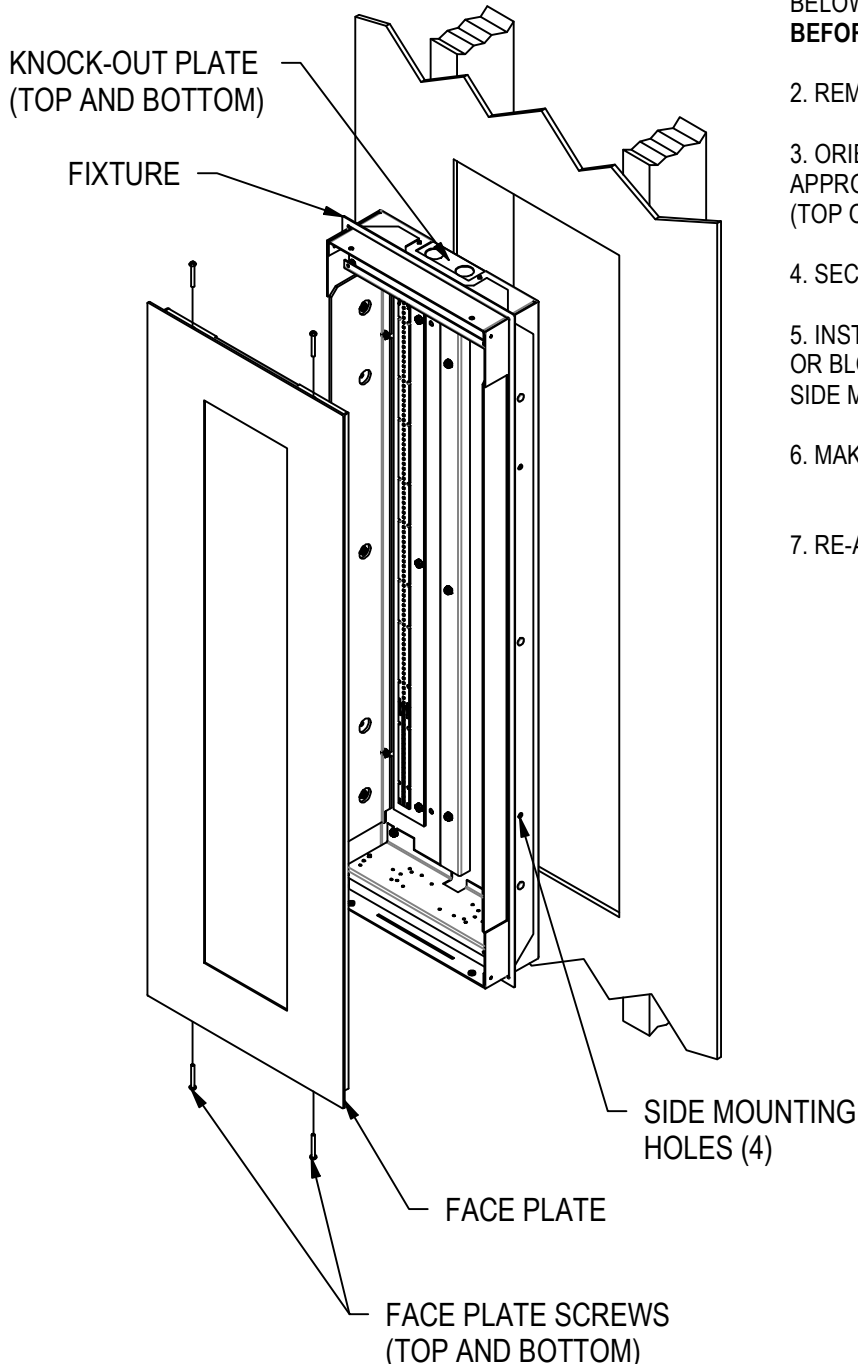

1. CUT A RECTANGULAR HOLE IN THE DESIRED LOCATION TO FIT THE FIXTURE DIMENSIONS. CUT OUT DIMENSIONS ARE PROVIDED BELOW. **CAUTION: TURN ALL POWER OFF AT ELECTRICAL BOX BEFORE CUTTING IN WALL.**

2. REMOVE FACE PLATE BY REMOVING (4) FACE PLATE SCREWS.

3. ORIENT FIXTURE FOR ELECTRICAL CONNECTION, REMOVE APPROPRIATE KNOCK-OUT FROM KNOCK-OUT PLATE (TOP OR BOTTOM).

4. SECURE POWER CONDUIT INSIDE FIXTURE.

5. INSTALL FIXTURE INTO WALL, ANCHOR FIXTURE TO WALL 2X4'S OR BLOCKING (BY OTHERS) WITH HARDWARE (BY OTHERS) THRU SIDE MOUNTING HOLES. FIXTURE MUST BE TIGHT TO WALL.

6. MAKE WIRE CONNECTIONS PER CODE.

7. RE-ASSEMBLE FACE PLATE WITH (4) FACE PLATE SCREWS.

RECTANGULAR CUT-OUT DIMENSIONS

28" ('H' LENGTH) FIXTURES: 26" X 11"

39.8" ('H' LENGTH) FIXTURES: 38" X 11"

52" ('H' LENGTH) FIXTURES: 50" X 11"

11/8/21
IS57194X