Vienna - Pendant

AIP8545 32.00 in

JOB NAME: TYPE: NOTES:

DESCRIPTION

Our cone collection offers a look previously not available in the market with high-output optical packages. We've taken difficult geometric volume and created luminous visual comfort and high-output indirect lighting in a contemporary form. The family includes pendant, chandelier, wall-mounted, and ceiling models to illuminate and enhance environments where you are looking for a distinct, strong form and proven optical performance.

FEATURES & BENEFITS

- Opal acrylic diffuser lens enhances a space with filtered illumination
- Spun metal trim ring adds high-quality, decorative element to fixture
- Handcrafted in USA

SPECIFICATIONS

- LIGHT SOURCE: White LED light engine
- CRI: 80+ or 90+
- LUMEN MAINTENANCE: L70 = >50,000 Hrs.
- CCT: 2700K, 3000K, 3500K, 4000K, 5000K
- DRIVER: Integral Class 2 power supply standard
- DIMMING: 0-10V controls standard to 10% on LED light engines
- **CONTROLS:** Contact factory for control options (e.g., Lutron Athena, Current NX, nLight, Enlighted, Encelium, Wattstopper, WaveLinx, or Casambi)
- EMERGENCY: Remote battery option is provided with 10W Constant Power Battery back-up, providing 90 Minutes of Emergency operation. Contact factory for other Emergency options.
- **DIFFUSER:** Opal acrylic is standard; matte acrylic and hand painted lenses optional. Any upward facing LEDs will be covered with a protective lens.
- **CONSTRUCTION:** Formed metal construction provides durable protection for internal components and is recyclable
- MODIFICATIONS: Consult factory for all modification requests
- APPROVALS: ETL listed to UL standards (US & Canada) for use




SPI IGHTI

PROJECT DETAILS

EMR

DIMENSIONS



W	H	OAH
32 in	13.2 in	49.2 in
81.3 cm	33.5 cm	125 cm
Mounting V	Veight te: 50 lb (23 l	ka)

CONFIGURATOR

To configure your spec sheet online, go to <u>www.spilighting.com/AIP8545</u>. Not all options are available in all configurations; consult factory for details.

Required Field *

Catalog AIP8545	Light Source*	Primary Finish*	Voltage*	Lamp Options*	CRI*	Diffuser*	Mounting*	Emergency	Bowl Options	Options	Other Than Standard Options
									Finish:	Finish:	
	A	A	В	С	D	E	F	G	Н	I	J

A - LIGHT SOURCE *

To ensure color consistency, SPI uses precise bin selection and strict quality processes to maintain a 3-step (MacAdam) SDCM on all white LED lampings. Published LED luminaire wattages are calculated using a typical power supply efficiency of 88%; exact wattages may vary based on application.

L86W | White 86W LED Light Engine | Delivered Lumens: 8,475

L172W | White 172W LED Light Engine | Delivered Lumens: 16,950

See last page for finish options

B - VOLTAGE *

120-277V | Universal Voltage



C - LAMP OPTIONS *

Delivered lumens shown are at 4000K CCT; apply multiplier for delivered lumens at other CCT.

2700K 2700K CCT
ЗОООК ЗОООК ССТ
3500К 3500К ССТ
4000К 4000К ССТ
5000К 5000К ССТ

	80 CRI	90 CRI
2700K	1.00	0.84
3000K	1.00	0.84
3500K	1.00	0.84
4000K	1.00	0.84
5000K	1.00	0.84

D - CRI *

DF_80	I	(default)	
90			

E - DIFFUSER *

DF_OA	 Opa	I Acrylic	Diffuser	Lens	(default)
-------	--------------	-----------	----------	------	-----------

- **HP01** | Silver Hand Painted Acrylic Diffuser
- HP02 | Beige Hand Painted Acrylic Diffuser
- HP03 | Amber Hand Painted Acrylic Diffuser
- MA01 | Matte Acrylic Diffuser Lens



F - MOUNTING *

Mounts to standard 4" octagonal junction box with auxiliary mounting holes. Additional support required (by others). Canopy features a 45 degree swivel.

DF_STM | Stem Mount (default)

SPILIGHTING

G - EMERGENCY


10W, Constant Power Battery Back-up, with 90 minutes of emergency operation. EMR includes damp location enclosure for Battery back-up.

EMR | Emergency Battery Remote

H - BOWL OPTIONS

FIN | Finial (See last page for finish options)

I - OPTIONS

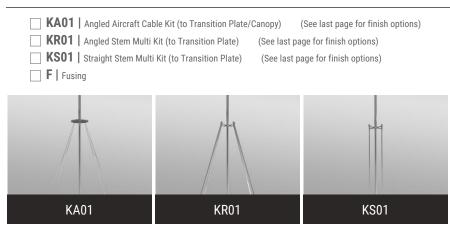

J - OTHER THAN STANDARD OPTIONS

Specify overall height required from ceiling to the bottom of the fixture.

OAH | Pendant suspension length other than standard Length:



Standard Finishes

The colors shown are representative. Their actual appearance may vary due to differences in display settings. You can request color chips by emailing <u>contact@spilighting.com</u>. Please note, finishes may not be available in all configurations.

Paint Colors

PT01 RAL9003 Signal White (Gloss)	PT51 Matte White (Textured)	PT02 White (Textured)	PT04 RAL9001 Cream (Textured)	PT67 RAL7044 Silk Grey (Textured)	
PT53 RAL7035 Light Grey (Textured)	PT54 RAL7037 Dusty Grey (Textured)	PT55 RAL7012 Basalt Grey (Textured)	PT56 RAL7016 Anthracite Grey (Textured)	PT11 Black (Textured)	
PT57 RAL1015 Light Ivory (Textured)	PT58 RAL8004 Copper Brown (Textured)	PT59 RAL6021 Pale Green (Textured)	PT60 RAL1019 Grey Beige (Textured)	PT61 RAL7006 Beige Grey (Textured)	
PT62 RAL1003 Signal Yellow (Textured)	PT63 RAL3001 Signal Red (Textured)	PT64 RAL6001 Emerald Green (Textured)	PT65 RAL5005 Signal Blue (Textured)	PT66 RAL5003 Sapphire Blue (Textured)	

Metallic Paint Colors

PT22 Platinum (Metallic Gloss)	PT48 Brass (Metallic Textured)	PT28 Dark Stainless (Metallic Gloss)	PT49 Bronze (Metallic Textured)	PT32 Dark Bronze (Metallic Gloss)	
PT46					
Aluminum (Metallic Textured)					
Aluminum (Metallic Textured)					

Brushed Aluminum

BAL	
Brushed Aluminum	

Brushed Brass

BBR	
Brushed Solid Brass	

Polished-Tinted Brass

ATBR	DTBR	PBR	
Antique Tinted Brass	Dark Tinted Brass	Polished Brass	

Plated Steel



Polished Plated Brass

CPBR	SNBR	
Chrome Plated Polished Brass	Satin Nickel Plated Brass	



Specialty Finishes



More RAL®, Pantone®, and custom finishes are available upon request. Setup fee and additional lead time applies.Call factory for details.