

# Echo Reflections 9.0 LED

EEW12280 13.00 in

JOB NAME:

TYPE:

NOTES:

## DESCRIPTION

Whether you want to deliver low-glare indirect illumination, accentuate the verticality of the space, or directly light the exterior of a building, Echo Reflections 9.0 is the solution. This powerful luminaire offers field adjustability and, unlike similar products, adjustable light engines that leave the fixture static. This ensures its appearance is always uniform, even when distributions are different for performance or obstructions. The sleek wedge design seamlessly blends into architecture. Available in 6,000, 12,000, and 24,000 lumen packages. For a complimentary lighting layout, contact our applications team at [SPITeam@spilighting.com](mailto:SPITeam@spilighting.com).

## FEATURES & BENEFITS

- Increase visual comfort, eliminate source brightness, and improve light uniformity with indirect lighting
- Field adjustable distribution ratchets to five positions: 35°, 17.5°, 0°, -17.5°, -35° while maintaining a static housing (ships from factory at 35° tilt)
- Wet listed for interior or exterior applications
- Robust construction with natorium option: rustproof aluminum housing, minimum 2 mils powder coat paint finish (except BAL finish), corrosion-resistant fasteners, gasketed and fully sealed LED modules, fully potted power supply
- Watertight power supply box
- Optional direct orientation available
- Solves a wide variety of lighting challenges in one package
- Indirect orientation has no visible fasteners within view
- Handcrafted in USA


## SPECIFICATIONS

- **LIGHT SOURCE:** White LED light engine
- **CRI:** 80+ or 90+
- **LUMEN MAINTENANCE:** L70 = >50,000 Hrs.
- **EFFICACY:** Up to 130 lm/W delivered
- **CCT:** 2700K, 3000K, 3500K, 4000K, 5000K
- **VOLTAGE:** 120-277V standard
- **DRIVER:** Fully potted integral Class 2 power supply standard



- **MAX AMBIENT OPERATING TEMP:** Indirect = 50°C (122°F);  
Direct = 47°C (117°F)
- **DIMMING:** 0-10V controls standard to 1% on LED light engines
- **CONTROLS:** Contact factory for control options (e.g., Lutron Athena, Current NX, nLight, Enlighted, Encelium, Wattstopper, WaveLinx, or Casambi)
- **EMERGENCY:** Remote battery option is provided with 10W Constant Power Battery back-up, providing 90 Minutes of Emergency operation. Contact factory for other Emergency options.
- **INTEGRATED SURGE PROTECTION:** LED components are protected against minor surge events
- **CONSTRUCTION:** Aluminum construction; precision injection molded optics
- **FINISH:** Choose from 26 standard thermoset polyester powder coat paint colors or brushed aluminum finish. RAL®, Pantone®, or custom finishes available upon request.
- **MOUNTING:** Mounts to a standard 4" octagonal junction box
- **MODIFICATIONS:** Consult factory for all modification requests
- **APPROVALS:** ETL listed to UL standards (US & Canada) for use in wet locations; suitable for interior or exterior use

## DIMENSIONS

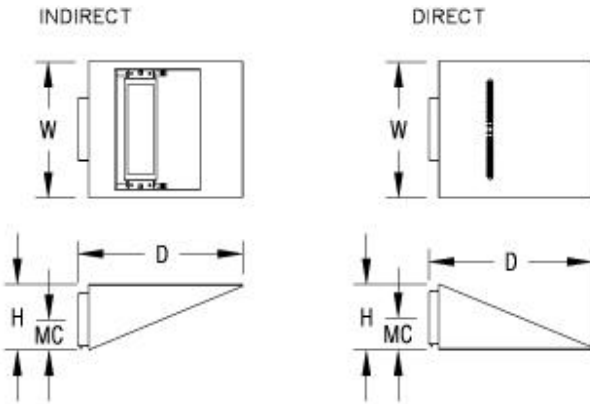


W	H	D	MC
13 in	6.2 in	15.6 in	3 in
33 cm	15.7 cm	39.6 cm	7.6 cm

**Mounting Weight**  
Approximate: 10 lb (5 kg)

## CONFIGURATOR

To configure your spec sheet online, go to [www.spilighting.com/EEW12280](http://www.spilighting.com/EEW12280). Not all options are available in all configurations; consult factory for details.

### Required Field \*

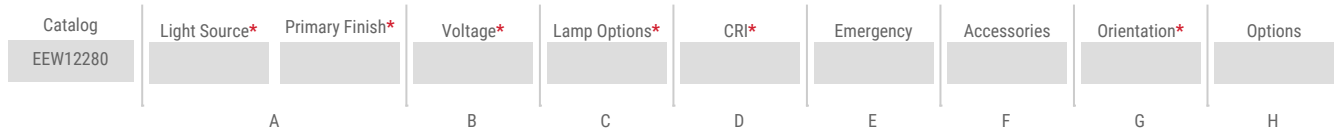

## A - LIGHT SOURCE \*

To ensure color consistency, SPI uses precise bin selection and strict quality processes to maintain a 3-step (MacAdam) SDCM on all white LED lampings. Published LED luminaire wattages are calculated using a typical power supply efficiency of 88%; exact wattages may vary based on application. Alternative wattages available upon request.

**L46W** | White 46W LED Light Engine | Delivered Lumens: 5,980

[See last page for finish options](#)

## B - VOLTAGE \*

**120-277V** | Universal Voltage

## C - LAMP OPTIONS \*

Apply multiplier from chart for delivered lumens at other CCT's and CRI's.

- 2700K** | 2700K CCT
- 3000K** | 3000K CCT
- 3500K** | 3500K CCT
- 4000K** | 4000K CCT
- 5000K** | 5000K CCT

	80 CRI	90 CRI
2700K	n/a	0.67
3000K	0.93	0.74
3500K	0.93	0.74
4000K	1.00	0.74
5000K	1.00	n/a

## D - CRI \*

- DF\_80**<sup>1</sup> | (default)
- 90**<sup>2</sup>

<sup>1</sup> Not available in 2700K

<sup>2</sup> Not available in 5000K

## E - EMERGENCY

---

10W, Constant Power Battery Back-up, with 90 minutes of emergency operation. EMR-Damp includes damp location enclosure for Battery back-up. EMR-W/L includes a wet location enclosure for battery back-up.

- EMR-DAMP** | Emergency Battery Remote - Damp Location
- EMR-W/L** | Emergency Battery Remote - Wet Location

## F - ACCESSORIES


---

Shield the source from view at certain angles, absorb or block unwanted light, or reflect and redirect light with optional cut-off shields and louvers. Cut-off shield (CS) and louver (LV) options cannot be used together.

- CS**<sup>3</sup> | Cut-Off Shield
- LV**<sup>4</sup> | Louver

<sup>3</sup> Apply .85 multiplier for delivered lumens

<sup>4</sup> Apply .55 multiplier for delivered lumens

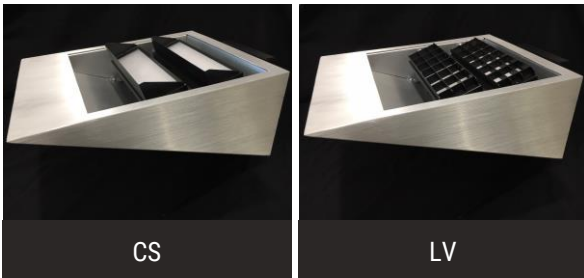

## G - ORIENTATION \*

---

Available in an optional direct orientation for lighting corridors, walkways, or anywhere else direct illumination is needed.

- DF\_IND** | Indirect Orientation (default)
- DIR**<sup>5</sup> | Direct Orientation

<sup>5</sup> Direct orientation includes thermal vents



## H - OPTIONS

---

When the NAT option is selected, you can feel confident that the luminaire specified is designed with high-quality materials that will withstand the corrosive environment of indoor pools. Electrical components are protected from moisture and the fixture has been tested to operate in warm ambient temperatures.

**NAT** | Natatorium Construction

**F** | Fusing

## Standard Finishes

The colors shown are representative. Their actual appearance may vary due to differences in display settings. You can request color chips by emailing [contact@spilighting.com](mailto:contact@spilighting.com). Please note, finishes may not be available in all configurations.

### Paint Colors

<b>PT01</b> RAL9003 Signal White (Gloss)	<b>PT51</b> Matte White (Textured)	<b>PT02</b> White (Textured)	<b>PT04</b> RAL9001 Cream (Textured)	<b>PT67</b> RAL7044 Silk Grey (Textured)
<b>PT53</b> RAL7035 Light Grey (Textured)	<b>PT54</b> RAL7037 Dusty Grey (Textured)	<b>PT55</b> RAL7012 Basalt Grey (Textured)	<b>PT56</b> RAL7016 Anthracite Grey (Textured)	<b>PT11</b> Black (Textured)
<b>PT57</b> RAL1015 Light Ivory (Textured)	<b>PT58</b> RAL8004 Copper Brown (Textured)	<b>PT59</b> RAL6021 Pale Green (Textured)	<b>PT60</b> RAL1019 Grey Beige (Textured)	<b>PT61</b> RAL7006 Beige Grey (Textured)
<b>PT62</b> RAL1003 Signal Yellow (Textured)	<b>PT63</b> RAL3001 Signal Red (Textured)	<b>PT64</b> RAL6001 Emerald Green (Textured)	<b>PT65</b> RAL5005 Signal Blue (Textured)	<b>PT66</b> RAL5003 Sapphire Blue (Textured)

### Metallic Paint Colors

<b>PT22</b> Platinum (Metallic Gloss)	<b>PT48</b> Brass (Metallic Textured)	<b>PT28</b> Dark Stainless (Metallic Gloss)	<b>PT49</b> Bronze (Metallic Textured)	<b>PT32</b> Dark Bronze (Metallic Gloss)
<b>PT46</b> Aluminum (Metallic Textured)				

### Brushed Aluminum

<b>BAL</b> Brushed Aluminum
--------------------------------

## Specialty Finishes



More RAL®, Pantone®, and custom finishes are available upon request. Setup fee and additional lead time applies. Call factory for details.