

ZYNN 3" LINES WET/STEAM



STEAM
ROOM

SPILIGHTING
www.spilighting.com

REFINE EXTREME ENVIRONMENTS

This high temperature, IP66-rated recessed linear fixture is specially designed for steam rooms and natatoriums. Its LED light engine is built to withstand the extreme heat and prolonged moisture exposure in these conditions. The housing integrates with the vapor barrier, providing a waterproof seal between the fixture and the surface. Available in 2' to 8' standard lengths and continuous runs.



UNMATCHED DURABILITY. CUTTING-EDGE DESIGN.

- Impressive max ambient room temperature rating of 50°C (122°F)
- Up to 700 lm/ft delivered
- Mount vertically or horizontally on ceilings and walls
- Wide 3" aperture softly diffuses light
- Dead front with no conductivity*
- Seamlessly integrates with the vapor barrier


**Mud-in only*



MUD-IN

Designed for the most challenging environments while boasting a modern and sleek appearance.

Catalog ID	Size	Wattage	Delivered Lumens
AES12383	2'	14	700
		28	1,400
	3'	21	1,050
		42	2,100
	4'	28	1,400
		56	2,800
	6'	42	2,100
		84	4,200
	8'	56	2,800
		112	5,600

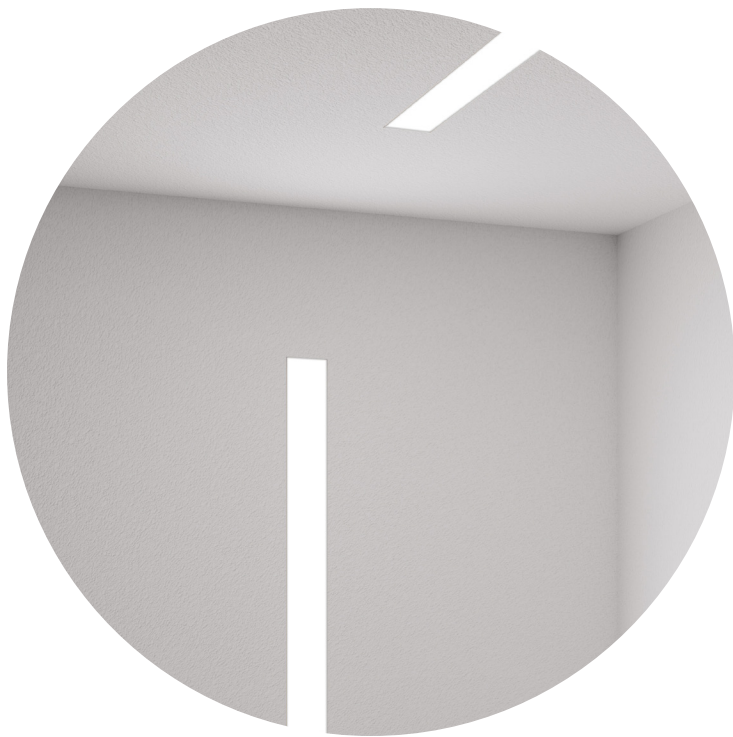

TILE-IN

Housing depth is adjustable after installation to ensure diffuser remains flush with finished surface.

Catalog ID	Size	Wattage	Delivered Lumens
AES12384	2'	14	700
		28	1,400
	3'	21	1,050
		42	2,100
	4'	28	1,400
		56	2,800
	6'	42	2,100
		84	4,200
	8'	56	2,800
		112	5,600



FLANGE

Versatile housing simplifies installation challenges.

Catalog ID	Size	Wattage	Delivered Lumens
AES12385	2'	14	700
		28	1,400
	3'	21	1,050
		42	2,100
	4'	28	1,400
		56	2,800
	6'	42	2,100
		84	4,200
	8'	56	2,800
		112	5,600

