

Echo Effect - Wall Plane Wash

EEW11960 18.40 in

JOB NAME:

TYPE:

NOTES:

DESCRIPTION

The Echo Effect is a fully recessed exterior wall and step light. The plane wash half-frosted (PW) optic is designed for maximum main beam power and incredible lateral distribution. It uses premium materials to direct the light evenly onto the ground or to highlight stairs for increased safety, minimizing glare from the luminaire. Built to last, this IP67 rated luminaire features an aluminum or stainless steel faceplate, stainless steel external fasteners, and tempered glass. Available in nominal lengths of 12", 18", and 24".

FEATURES & BENEFITS

- Optically engineered, precision LED optics control light distribution and direct light where it is needed
- Premium 95% reflective aluminum is utilized in the highly-efficient and effective reflector design
- All visible fasteners are flush mounted, providing a clean design
- Stainless steel external fasteners will not rust or corrode
- Recessed housing has anodized finish providing optimal thermal effectiveness and durable corrosion protection
- Compliant with Americans with Disabilities Act (ADA) requirements
- Handcrafted in USA



SPECIFICATIONS


- **LIGHT SOURCE:** White LED light engine
- **CRI:** 80+ or 90+
- **LUMEN MAINTENANCE:** L70 = >50,000 Hrs.
- **CCT:** 2700K, 3000K, 3500K, 4000K, 5000K
- **VOLTAGE:** 120-277V standard
- **DRIVER:** Integral Class 2 power supply standard
- **DIMMING:** This product is non-dimmable, contact factory to discuss options.
- **CONTROLS:** Contact factory for control options (e.g., Lutron Athena, Current NX, nLight, Enlighted, Encelium, Wattstopper, WaveLinx, or Casambi)
- **EMERGENCY:** Remote battery option is provided with 10W Constant Power Battery back-up, providing 90 Minutes of

Emergency operation. Contact factory for other Emergency options.

- **CONSTRUCTION:** Tempered glass lens protects fixture lamp engine. Aluminum construction provides durable protection for internal components and is recyclable.
- **FINISH:** Choose from 26 standard thermoset polyester powder coat paint colors or various metal finishes. RAL®, Pantone®, or custom finishes available upon request.
- **MOUNTING:** Capable of 1/2 IP conduit connection.
- **APPROVALS:** ETL listed to UL standards (US and Canada) for poured concrete applications and use in wet locations. IP67 rated fixture per International Electrotechnical Commission (IEC) certifies fixture as dust-tight and protected against temporary immersion.

ATTENTION!! CORD MUST RUN UNINTERRUPTED FROM THE FIXTURE TO A LIQUID TIGHT SPLICE ENCLOSURE (BY OTHERS). DO NOT CUT CORD AND MAKE SPLICE IN RECESSED BOX BEHIND FIXTURE. THIS BOX IS NOT LIQUID TIGHT. MAKING THE CONNECTION THERE WILL CAUSE THE PRODUCT TO FAIL AND VOID ITS WARRANTY.

DIMENSIONS

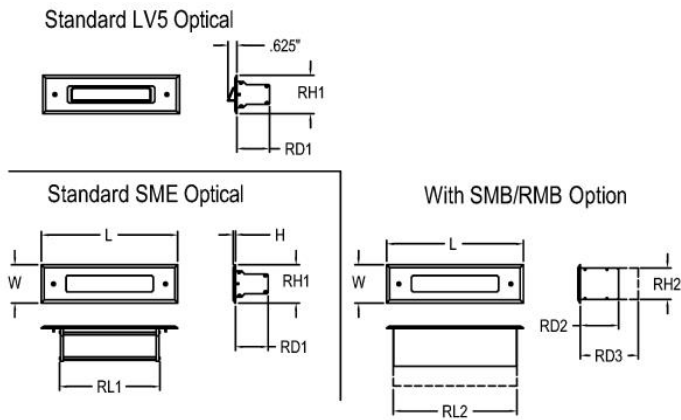

| | | | | | | |
|--|----------------------------------|----------------------------------|------------------------------|--------------------------------|---------------------------------|--------------------------------|
| W 3.5 in 8.9 cm | H 0.2 in 0.5 cm | L 18.4 in 46.7 cm | RD1 3 in 7.6 cm | RD2 3.5 in 8.9 cm | RD3 5.3 in 13.5 cm | RH1 2.4 in 6.1 cm |
| RH2 3 in 7.6 cm | RL1 15.1 in 38.4 cm | RL2 17.2 in 43.7 cm | | | | |
| Mounting Weight Consult Factory. | | | | | | |

CONFIGURATOR

To configure your spec sheet online, go to www.spilighting.com/EEW11960. Not all options are available in all configurations; consult factory for details.

Required Field *

| Catalog | Light Source* | Primary Finish* | Voltage* | Lamp Options* | CRI* | Emergency | Mounting Box* | Optical Distribution* |
|----------|---------------|-----------------|----------|---------------|------|-----------|---------------|-----------------------|
| EEW11960 | | | | | | | | |
| | A | | B | C | D | E | F | G |

A - LIGHT SOURCE *

To ensure color consistency, SPI uses precise bin selection and strict quality processes to maintain a 3-step (MacAdam) SDCM on all white LED lampings. Published LED luminaire wattages are calculated using a typical power supply efficiency of 88%; exact wattages may vary based on application. Delivered lumens shown below are for Plane Wash distribution. Alternate wattages available upon request.

L11W | White 11W LED Light Engine | Delivered Lumens: 460

L14W | White 14W LED Light Engine | Delivered Lumens: 585

See last page for finish options

B - VOLTAGE *

120-277V | Universal Voltage

C - LAMP OPTIONS *

Apply multiplier from chart for delivered lumens at other CCT's and CRI's.

2700K | 2700K CCT

3000K | 3000K CCT

3500K | 3500K CCT

4000K | 4000K CCT

5000K | 5000K CCT

| | 80 CRI | 90 CRI |
|-------|--------|--------|
| 2700K | 1.00 | 0.84 |
| 3000K | 1.00 | 0.84 |
| 3500K | 1.00 | 0.84 |
| 4000K | 1.00 | 0.84 |
| 5000K | 1.00 | 0.84 |

D - CRI *

DF_80 | (default)

90

E - EMERGENCY

10W, Constant Power Battery Back-up, with 90 minutes of emergency operation. EMR-Damp includes damp location enclosure for Battery back-up. EMR-W/L includes a wet location enclosure for battery back-up.

EMR-DAMP | Emergency Battery Remote - Damp Location

EMR-W/L | Emergency Battery Remote - Wet Location

F - MOUNTING BOX *

If requested, back boxes can ship ahead of fixtures.

- RMB**¹ | Recessed Mount Box, 3' Lead Length
- SMB04**² | Shallow Mounting Box, 4' Lead Length
- SMB15**² | Shallow Mounting Box, 15' Lead Length
- SMB50**² | Shallow Mounting Box, 50' Lead Length

¹ RD3 = 5.3"

² RD2 = 3.5"

G - OPTICAL DISTRIBUTION *

See IES zip file for photometrics and polar plot for each distribution.

- DF_PW** | Plane Wash Half Frosted (default)
- SME**³ | Symmetric
- LV5**⁴ | Cut-Off Shield

³ Delivered lumens are 70% of Plane Wash output shown above

⁴ Delivered lumens are 57% of Plane Wash output shown above

Standard Finishes

The colors shown are representative. Their actual appearance may vary due to differences in display settings. You can request color chips by emailing contact@spilighting.com. Please note, finishes may not be available in all configurations.

Paint Colors

| | | | | |
|---|--|---|---|---|
| PT01 RAL9003 Signal White (Gloss) | PT51 Matte White (Textured) | PT02 White (Textured) | PT04 RAL9001 Cream (Textured) | PT67 RAL7044 Silk Grey (Textured) |
| PT53 RAL7035 Light Grey (Textured) | PT54 RAL7037 Dusty Grey (Textured) | PT55 RAL7012 Basalt Grey (Textured) | PT56 RAL7016 Anthracite Grey (Textured) | PT11 Black (Textured) |
| PT57 RAL1015 Light Ivory (Textured) | PT58 RAL8004 Copper Brown (Textured) | PT59 RAL6021 Pale Green (Textured) | PT60 RAL1019 Grey Beige (Textured) | PT61 RAL7006 Beige Grey (Textured) |
| PT62 RAL1003 Signal Yellow (Textured) | PT63 RAL3001 Signal Red (Textured) | PT64 RAL6001 Emerald Green (Textured) | PT65 RAL5005 Signal Blue (Textured) | PT66 RAL5003 Sapphire Blue (Textured) |


Brushed Stainless

| | |
|---------------------------------------|---|
| BSS Brushed Stainless Steel |  |
|---------------------------------------|---|

Metallic Paint Colors

| | | | | |
|---|--|--|---|---|
| PT22 Platinum (Metallic Gloss) | PT48 Brass (Metallic Textured) | PT28 Dark Stainless (Metallic Gloss) | PT49 Bronze (Metallic Textured) | PT32 Dark Bronze (Metallic Gloss) |
| PT46 Aluminum (Metallic Textured) | | | | |

Brushed Aluminum

| | |
|--------------------------------|---|
| BAL Brushed Aluminum |  |
|--------------------------------|---|

Specialty Finishes



More RAL®, Pantone®, and custom finishes are available upon request. Setup fee and additional lead time applies. Call factory for details.