

IMPORTANT SAFETY AND INSTALLATION INSTRUCTIONS



WARNING: Risk of fire and electrical shock. This product is to be installed by a qualified electrician only.

CAUTION: When using electrical equipment, basic safety precautions should always be followed including the following: Read all instructions carefully before installation and save

for future use. Make sure installation and all connections are in accordance with National Electrical Code and any local regulations. To avoid possible electrical shock, be sure that power supply is turned off before installing or servicing this fixture. Servicing should be performed by qualified service personnel.

These instructions do not claim to cover all details or variations. When additional information is desired, please contact your SPI representative.

RECESSED LED FIXTURE

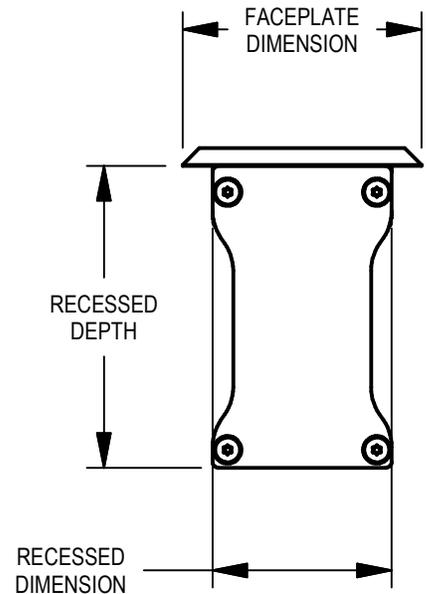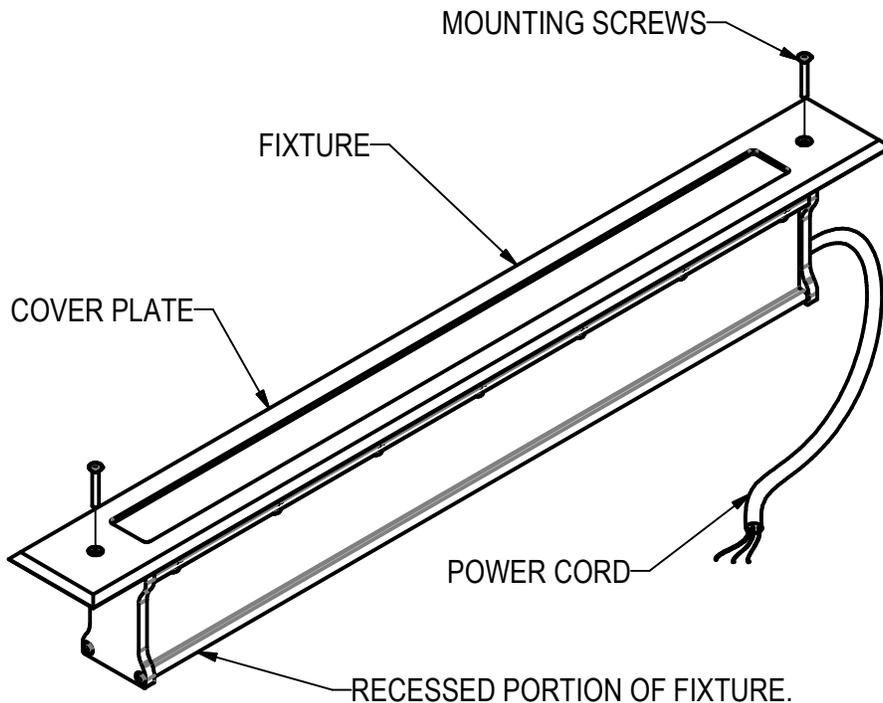

INSTALLATION:

1. MEASURE RECESSED PORTION OF FIXTURE AND PREPARE MOUNTING SURFACE TO ACCEPT THE RECESSED PORTION. THE HOLE CAN NOT BE LARGER THAN THE COVER PLATE OF FIXTURE.
2. MAKE SUPPLY CONNECTIONS PER LOCAL CODE. CONNECTIONS TO BE MADE IN A UL LISTED LIQUID TIGHT J-BOX (BY OTHERS). WHEN CUTTING SUPPLIED CORD, ENSURE THAT THE CORD IS LONG ENOUGH TO REACH SPLICE CONNECTION.
3. PLACE FIXTURE IN OPENING AND SECURE TO SURFACE WITH SCREWS. (2) #6-32 X 1.00" LONG, MACHINE SCREWS WITH A TAMPER RESISTANT PIN IN TORX DRIVE ARE INCLUDED WITH FIXTURE AS MOUNTING SCREWS.

12/10/2014
IS66893X