


PAVO INTERIOR PENDANT
SIP12133

Create a striking visual accent with this slim 2" diameter pendant. Even illumination (top to bottom and radially) and clean-finished ends satisfy the highest-end applications. True to its minimalist design, it has no metal collars to break the form. Hang individually or design an array for a dramatic visual statement. Available in a wide range of sizes, from 6" to 8' long.

JOB NAME

TYPE

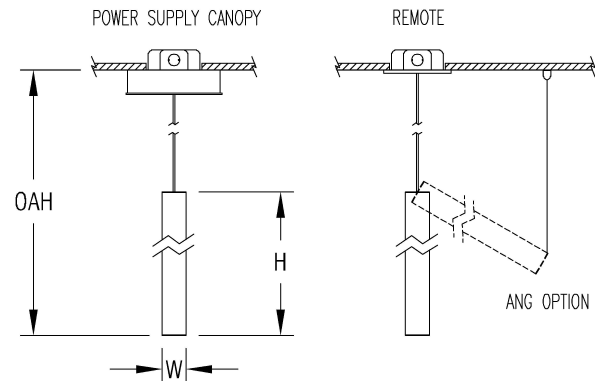

Dimensions

W
2.0 in
5.1 cm

Weight

Hanging weight: 10.0 lb (4.5 kg).

Features

- Linearly-lit pendant provides even 360° illumination along the entire length of the lens
- Meticulously designed ends have no visible shadowing
- Create angular and horizontal configurations with a unique angle mount option
- Contact factory for multi-unit arrays on a single canopy
- Alternative wattages available upon request
- Pairs well with entire Pavo family, which features fully illuminated cylindrical forms from 2" to 12" in diameter and 6" to 8' lengths

Technical Notes

Construction

- Aluminum construction

Electrical

- LED light source
- To ensure color consistency, SPI uses precise bin selection and strict quality processes to maintain a 3-step (MacAdam) SDCM on all white LED lampings
- ETL listed to UL standards (US and Canada) for damp locations; not recommended for wet locations
- Integrated heat sink
- Luminaire efficacy: 83 lm/W delivered
- Published luminaire wattages are calculated using a typical power supply efficiency of 88%; exact wattages may vary based on application
- Integrated surge protection: LED components are protected against minor surge events
- 120-277V standard
- LED lampings feature 1% dimming with 0-10V control standard (except 6"H which dims to 10%)

Finish

- White matte acrylic diffuser

- Flat end plates and mounting components finished to match, unless otherwise specified
- Standard thermoset polyester powder coat paint provides durable protection; available in more than 30 colors
- Custom colors available upon request

Light source

- Choice of 3000K, 3500K or 4000K CCT for LED lampings
- L70 life=50,000+ hours
- Delivered lumens shown are at 4000K CCT; apply multiplier for delivered lumens at other CCT

Mounting

- Mounts to standard 4" octagonal junction box
- Standard with silver braided miniature power cable (adjustable to OAH) and Class II power supply integrated in canopy (45° swivel) except 8'H high-output model which uses a standard white power cord
- Power supply canopy diameters vary depending on length
- Remote power supply optional with discreet 5.5" diameter canopy
- Stem mounting optional

Additional Documents

[Color Chart \(http://www.spilighting.com/PDFs/SPI_Color_Chart.pdf\)](http://www.spilighting.com/PDFs/SPI_Color_Chart.pdf)

MODEL NUMBER	LIGHT SOURCE and LENGTH	FINISH	VOLTAGE	LAMP OPTIONS	OPTIONS

Not all options are available in all configurations, consult factory for details.

Light Source	Photometry	Voltage	Options
1/2 FOOT NOMINAL FIXTURE		120-277V Universal Voltage	OA White Gloss Acrylic Diffuser
1/2FT-L4W ¹	White 4W LED Light Engine Delivered Lumens: 334	PAVO 2 RADIAL 6IN HIGH	CAS 5.5" Canopy & Stem, Remote Supply
1 FOOT NOMINAL FIXTURE		Lamp Options	ANG ¹⁰ Adjustable Angle Mount
1FT-L4W ²	White 4W LED Light Engine Delivered Lumens: 334	PAVO 2 RADIAL 1FT LOW	CAC Power Cord Suspension with Remote Power Supply & 5.5" Canopy
1FT-L8W ²	White 8W LED Light Engine Delivered Lumens: 667	PAVO 2 RADIAL 1FT HIGH	OAH Pendant suspension length other than standard
2 FOOT NOMINAL FIXTURE		3000K ⁸ 3000K CCT	PSS ¹¹ Power Supply Canopy & Stem
2FT-L8W ³	White 8W LED Light Engine Delivered Lumens: 667	PAVO 2 RADIAL 2FT LOW	
2FT-L16W ³	White 16W LED Light Engine Delivered Lumens: 1,335	PAVO 2 RADIAL 2FT HIGH	
3 FOOT NOMINAL FIXTURE		3500K ⁹ 3500K CCT	
3FT-L12W ⁴	White 12W LED Light Engine Delivered Lumens: 1,002	PAVO 2 RADIAL 3FT LOW	
3FT-L24W ⁴	White 24W LED Light Engine Delivered Lumens: 2,003	PAVO 2 RADIAL 3FT HIGH	
4 FOOT NOMINAL FIXTURE		4000K 4000K CCT	
4FT-L16W ⁵	White 16W LED Light Engine Delivered Lumens: 1,335	PAVO 2 RADIAL 4FT LOW	
4FT-L32W ⁵	White 32W LED Light Engine Delivered Lumens: 2,671	PAVO 2 RADIAL 4FT HIGH	
6 FOOT NOMINAL FIXTURE			
6FT-L24W ⁶	White 24W LED Light Engine Delivered Lumens: 2,003	PAVO 2 RADIAL 6FT LOW	
6FT-L48W ⁶	White 48W LED Light Engine Delivered Lumens: 4,006	PAVO 2 RADIAL 6FT HIGH	
8 FOOT NOMINAL FIXTURE			
8FT-L32W ⁷	White 32W LED Light Engine Delivered Lumens: 2,671	PAVO 2 RADIAL 8FT LOW	
8FT-L65W ⁷	White 65W LED Light Engine Delivered Lumens: 5,425	PAVO 2 RADIAL 8FT HIGH	

¹ W=2.0in (5.1cm) H=6.0in (15.2cm) OAH=54.0in (137.2cm)
² W=2.0in (5.1cm) H=12.0in (30.5cm) OAH=60.0in (152.4cm)
³ W=2.0in (5.1cm) H=24.0in (61.0cm) OAH=72.0in (182.9cm)
⁴ W=2.0in (5.1cm) H=36.0in (91.4cm) OAH=84.0in (213.4cm)
⁵ W=2.0in (5.1cm) H=48.0in (121.9cm) OAH=96.0in (243.8cm)
⁶ W=2.0in (5.1cm) H=72.0in (182.9cm) OAH=120.0in (304.8cm)
⁷ W=2.0in (5.1cm) H=96.0in (243.8cm) OAH=144.0in (365.8cm)
⁸ Apply .95 multiplier for delivered lumens
⁹ Apply .97 multiplier for delivered lumens
¹⁰ ANG Not available with 8'H model or stem mounting
¹¹ Canopy: 6"H = 6" dia., 1 - 3'H = 8" dia., 4 - 8'H = 10" dia.

Painted Finishes

PT01 Super White	PT07 Light Taupe	PT13 Warm Gray	PT19 Blue	PT29 Red Brass	PT42 Sky Blue	PT48 Brass
PT02 White	PT08 Medium Taupe	PT14 Light Gray	PT20 Dark Green	PT31 Medium Bronze	PT43 Teal	PT49 Bronze
PT03 Morning Light	PT09 Medium Gray	PT15 Sage	PT21 Pearl White	PT32 Dark Bronze	PT44 Green	PT51 Matte White
PT04 Warm White	PT10 Dark Gray	PT16 Spruce	PT22 Platinum	PT33 Dark Blue	PT45 Purple	
PT05 Putty	PT11 Black	PT17 Red	PT27 Deep Copper	PT40 Yellow	PT46 Aluminum	
PT06 Warm Beige	PT12 Dark Chocolate	PT18 Deep Red	PT28 Dark Stainless	PT41 Orange	PT47 Deep Red Brass	

Metal and Plated Finishes

BAL Brushed Aluminum	MAL Microbrushed Aluminum
----------------------	---------------------------