

# Vallejo LC 8", 10", 12" - Pendant

SIP12082 8.00 in

JOB NAME:

TYPE:

NOTES:

## DESCRIPTION

Add elegance and radiance to your most discerning spaces. This luminous cylinder's integral regressed downlight delivers correct light levels where needed. Ambient illumination provides a gentle visual warm-up to the higher output downlight source while adding light to the vertical plane to open up spaces. Meticulous attention to detail ensures suitability for the highest-end applications. Integral power supply enables a discreet 5" canopy.

## FEATURES & BENEFITS

- Fixture has a bi-planar ambient finished bottom detail with or without the regressed downlight component
- Integral regressed downlight available in 1900lm and beam spread of narrow, medium, wide or very wide
- Matte acrylic ambient cylinder diffuser is balanced with the proper amount of illumination while providing a sensible wattage allotment
- Integrated LED luminaire design features a sophisticated passive cooling system with integrated heat sink
- Ambient and downlight components are standard with separate switching and 0-10v dimming
- Handcrafted in USA


## SPECIFICATIONS

- **LIGHT SOURCE:** White LED light engine (contact factory for RGBW or Tunable White)
- **CRI:** 80+ or 90+
- **LUMEN MAINTENANCE:** L80 = >60,000 Hrs.
- **EFFICACY:** up to 103 lm/W delivered
- **CCT:** 2700K, 3000K, 3500K, 4000K, 5000K
- **VOLTAGE:** 120-277V standard
- **DRIVER:** Integral Class 2 power supply standard
- **DIMMING:** 0-10V controls standard to 1% on LED light engines
- **CONTROLS:** Contact factory for control options (e.g., Lutron Athena, Current NX, nLight, Enlighted, Encelium, Wattstopper, WaveLinx, or Casambi).



- **EMERGENCY:** Remote battery option is provided with 10W Constant Power Battery back-up, providing 90 Minutes of Emergency operation. Contact factory for other Emergency options.
- **INTEGRATED SURGE PROTECTION:** LED components are protected against minor surge events
- **DIFFUSER:** White matte acrylic diffuser standard; white gloss acrylic diffuser optional
- **CONSTRUCTION:** Aluminum
- **FINISH:** End plates, power supply enclosure, and mounting components finished to match. To specify separately, contact factory. Choose from 26 standard thermoset polyester powder coat paint colors. RAL®, Pantone®, or custom finishes available upon request.
- **MODIFICATIONS:** Consult factory for all modification requests, including RGBW or Tunable White
- **APPROVALS:** ETL listed to UL standards (US & Canada) for use in damp locations; not recommended for exterior applications

## DIMENSIONS

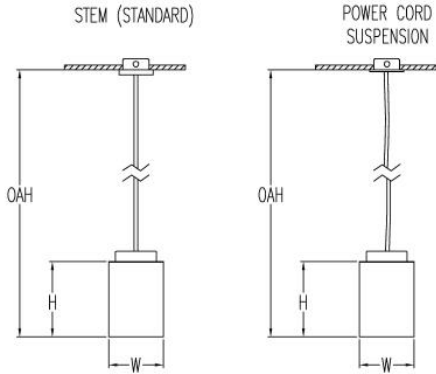

W	H	OAH
8 in	12 in	60 in
20.3 cm	30.5 cm	152.4 cm

**Mounting Weight**  
Approximate: 15 lb (7 kg)

## CONFIGURATOR

To configure your spec sheet online, go to [www.spilighting.com/SIP12082](http://www.spilighting.com/SIP12082). Not all options are available in all configurations; consult factory for details.

### Required Field \*

Catalog	Light Source*	Primary Finish*	Voltage*	Lamp Options*	CRI*	Light Source Option*	Diffuser*	Mounting*	Emergency	Other Than Standard Options
SIP12082	A	B	C	D	E	F	G	H	I	

## A - LIGHT SOURCE \*

To ensure color consistency, SPI uses precise bin selection and strict quality processes to maintain a 3-step (MacAdam) SDCM on all white LED lampings. Published LED luminaire wattages are calculated using a typical power supply efficiency of 88%; exact wattages may vary based on application. Alternative wattages available upon request.

**L10W** | White 10W LED Light Engine | Delivered Lumens: 980

[See last page for finish options](#)

## B - VOLTAGE \*

120-277V | Universal Voltage

## C - LAMP OPTIONS \*

Apply multiplier from charts for delivered lumens at other CCT's and CRI's.

- 2700K | 2700K CCT
- 3000K | 3000K CCT
- 3500K | 3500K CCT
- 4000K | 4000K CCT
- 5000K | 5000K CCT

	MAIN BODY LIGHT		DOWN LIGHT		
	80 CRI	90 CRI	80 CRI	90 CRI	
2700K	1.00	0.84	2700K	0.92	0.78
3000K	1.00	0.84	3000K	0.95	0.82
3500K	1.00	0.84	3500K	0.97	0.86
4000K	1.00	0.84	4000K	1.00	0.88
5000K	1.00	0.84	5000K	1.00	0.88


## D - CRI \*

- DF\_80 | (default)
- 90

## E - LIGHT SOURCE OPTION \*

If you're specifying a downlight option, layer the ambient and downlight IES files. Downlight CCT will match the Lamp Options selection above. Please choose one:

- 18W-26° Narrow | 18W (1900 delivered lumens) Downlight - 26° Beam
- 18W-40° Medium | 18W (1900 delivered lumens) Downlight - 40° Beam
- 18W-55° Wide | 18W (1900 delivered lumens) Downlight - 55° Beam
- 18W-90° Very Wide | 18W (1900 delivered lumens) Downlight - 90° Beam
- No DL | No Downlight

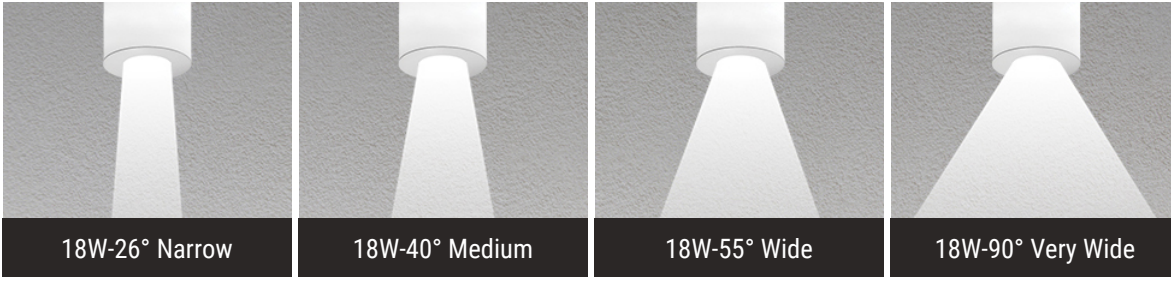

**F - DIFFUSER \***

- DF\_MA01 | Matte Acrylic Diffuser Lens (default)
- OA | White Gloss Acrylic Diffuser



**G - MOUNTING \***

Mounts to standard 4" octagonal junction box. Stem mount standard with 22.5 degree swivel. White power cord suspension optional (adjustable up to OAH) Power cord suspension option (PCS) must combine ambient and downlight to one circuit with a common 0-10V dimming

- DF\_STM | 5.5" Canopy Stem Mount (default)
- PCS <sup>1</sup> | 5.5" Canopy & Power Cord Suspension

<sup>1</sup> Separate switching not available

**H - EMERGENCY**

10W, Constant Power Battery Back-up, with 90 minutes of emergency operation. EMR includes damp location enclosure for Battery back-up.

- EMR | Emergency Battery Remote

**I - OTHER THAN STANDARD OPTIONS**

Specify overall height required from ceiling to the bottom of the fixture.

OAH | Pendant suspension length other than standard

## Standard Finishes

The colors shown are representative. Their actual appearance may vary due to differences in display settings. You can request color chips by emailing [contact@spilighting.com](mailto:contact@spilighting.com). Please note, finishes may not be available in all configurations.

### Paint Colors

<b>PT01</b> RAL9003 Signal White (Gloss)	<b>PT51</b> Matte White (Textured)	<b>PT02</b> White (Textured)	<b>PT04</b> RAL9001 Cream (Textured)	<b>PT67</b> RAL7044 Silk Grey (Textured)
<b>PT53</b> RAL7035 Light Grey (Textured)	<b>PT54</b> RAL7037 Dusty Grey (Textured)	<b>PT55</b> RAL7012 Basalt Grey (Textured)	<b>PT56</b> RAL7016 Anthracite Grey (Textured)	<b>PT11</b> Black (Textured)
<b>PT57</b> RAL1015 Light Ivory (Textured)	<b>PT58</b> RAL8004 Copper Brown (Textured)	<b>PT59</b> RAL6021 Pale Green (Textured)	<b>PT60</b> RAL1019 Grey Beige (Textured)	<b>PT61</b> RAL7006 Beige Grey (Textured)
<b>PT62</b> RAL1003 Signal Yellow (Textured)	<b>PT63</b> RAL3001 Signal Red (Textured)	<b>PT64</b> RAL6001 Emerald Green (Textured)	<b>PT65</b> RAL5005 Signal Blue (Textured)	<b>PT66</b> RAL5003 Sapphire Blue (Textured)

### Metallic Paint Colors

<b>PT22</b> Platinum (Metallic Gloss)	<b>PT48</b> Brass (Metallic Textured)	<b>PT28</b> Dark Stainless (Metallic Gloss)	<b>PT49</b> Bronze (Metallic Textured)	<b>PT32</b> Dark Bronze (Metallic Gloss)
<b>PT46</b> Aluminum (Metallic Textured)				

## Specialty Finishes



More RAL®, Pantone®, and custom finishes are available upon request. Setup fee and additional lead time applies. Call factory for details.