

# IMPORTANT SAFETY AND INSTALLATION INSTRUCTIONS

**WARNING:** Risk of fire and electrical shock. This product is to be installed by a qualified electrician only.

**CAUTION:** When using electrical equipment, basic safety precautions should always be followed including the following: Read all instructions carefully before installation and save


for future use. Make sure installation and all connections are in accordance with National Electrical Code and any local regulations. To avoid possible electrical shock, be sure that power supply is turned off before installing or servicing this fixture. Servicing should be performed by qualified service personnel.

These instructions do not claim to cover all details or variations. When additional information is desired, please contact your SPI representative.

---



## ECHO 3.5 AIRCRAFT CABLE MOUNT

---

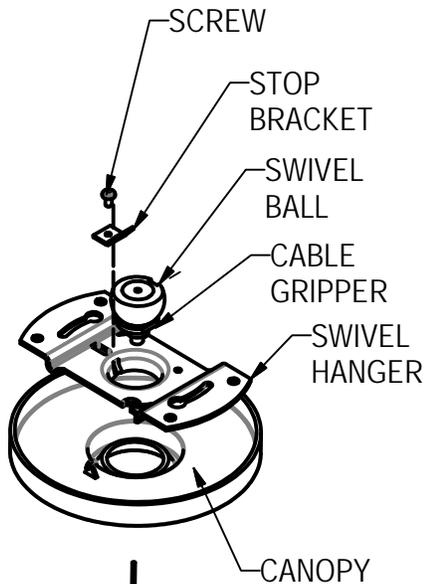

1. FEED AIRCRAFT CABLE UP THROUGH CANOPY, SWIVEL HANGER AND INSERT INTO CABLE GRIPPER.
2. TWIST AND LOCK SWIVEL HANGER TO J-BOX, AND SECURE BY TIGHTENING THE SCREWS (BY OTHERS) IN THE J-BOX.
3. FEED POWER CORD UP THROUGH THE HOLE IN THE CANOPY AND MAKE THE WIRE CONNECTIONS, PER CODE.
4. SECURE CANOPY TO SWIVEL HANGER BY PUSHING UPWARD AND TWISTING TO ENGAGE FASTENING TAB.

**NOTE:** TO AIM FIXTURE, ONCE INSTALLED, LOOSEN THE ROUND HEAD SCREW, APPROX 1/2 TURN, (DO NOT REMOVE THE SCREW) LOCATED INSIDE NEAR THE LAMP SOCKET, THE FIXTURE WILL NOW ROTATE. ONCE THE FIXTURE IS AT THE DESIRED LOCATION, TIGHTEN THE ROUND HEAD SCREW.

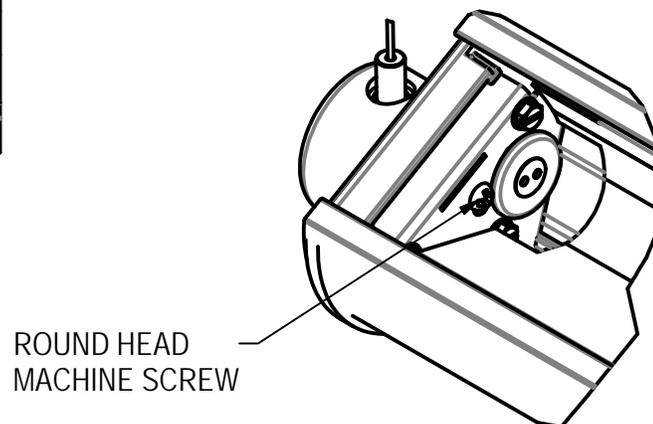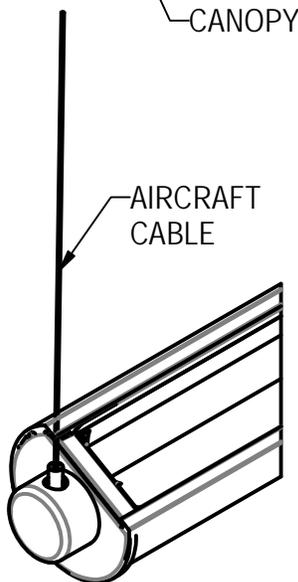

11/26/13  
IS45005X