

IMPORTANT SAFETY AND INSTALLATION INSTRUCTIONS

WARNING: Risk of fire and electrical shock. This product is to be installed by a qualified electrician only.



CAUTION: When using electrical equipment, basic safety precautions should always be followed including the following: Read all instructions carefully before installation and save

for future use. Make sure installation and all connections are in accordance with National Electrical Code and any local regulations. To avoid possible electrical shock, be sure that the power supply is turned off before installing or servicing this fixture. Servicing should be performed by qualified service personnel.

These instructions do not claim to cover all details or variations. When additional information is desired, please contact your SPI representative.

NOVATO RING CEILING MOUNT

1. REMOVE LENS ASSEMBLY FROM FIXTURE BY REMOVING ANTI ROTATION FASTENER FROM OPENING IN THE INNER SIDEWALL OF MOUNT HOUSING, THEN ROTATING COUNTER CLOCKWISE UNTIL BALL STUDS ON LENS RINGS ARE FREE FROM MOUNTING SLOTS.
2. ATTACH MOUNT HOUSING OVER J-BOX (BY OTHERS) USING HARDWARE (BY OTHERS). SECURE HOUSING TO CEILING USING AUXILIARY MOUNTING HOLES AND HARDWARE (BY OTHERS).
3. MAKE NECESSARY ELECTRICAL CONNECTIONS.
4. RAISE LENS ASSEMBLY SO BALLS ON MOUNTING STUDS ENGAGE IN MOUNTING SLOTS AND ROTATE UNTIL IT STOPS. DO NOT PRESS ON LENS ASSEMBLY AS DAMAGE MAY OCCUR.
5. REPLACE ANTI ROTATION FASTENER. ENSURE THAT THE FASTENER HEAD MAKES CONTACT WITH THE BLOCK.
6. NOTE: MOUNTING TENSION CAN BE ADJUSTED BY TIGHTENING OR LOOSENING BALLS ON LENS ASSEMBLY MOUNTING STUDS.
7. LAMP PLATE CAN BE REMOVED FOR MORE ACCESS BY REMOVING SCREWS FROM STANDOFFS IF NEEDED.

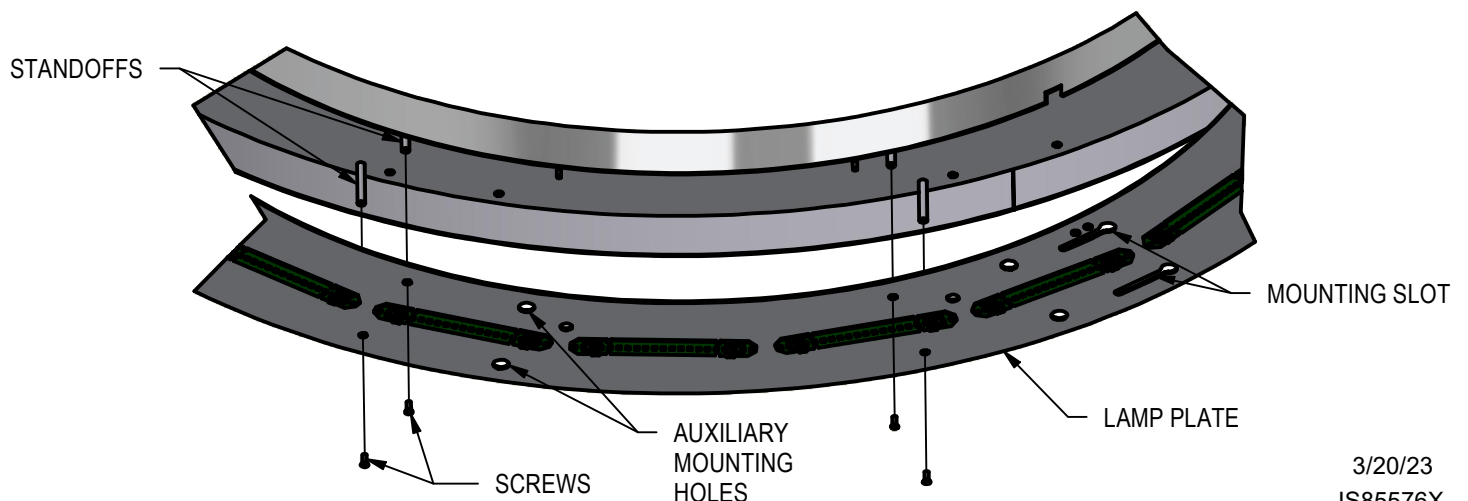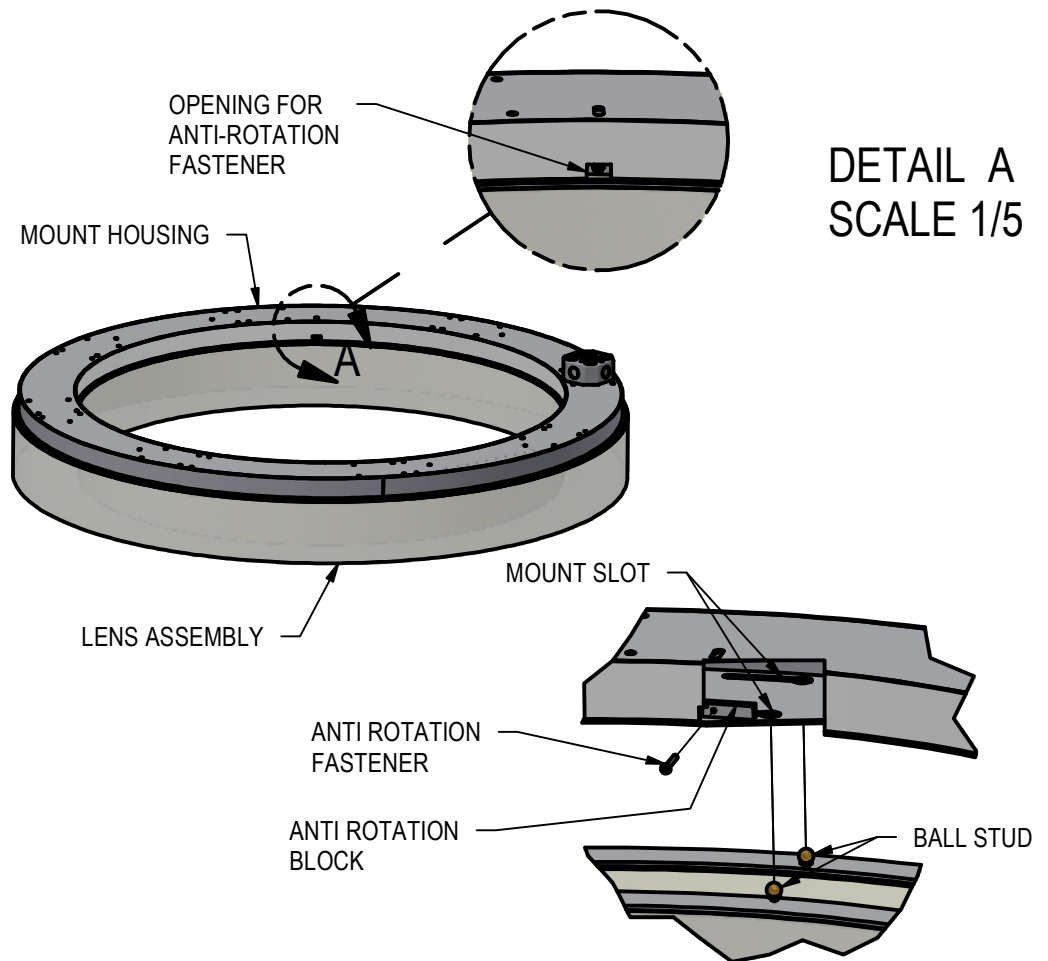

3/20/23
IS85576X