

IMPORTANT SAFETY AND INSTALLATION INSTRUCTIONS

WARNING: Risk of fire and electrical shock. This product is to be installed by a qualified electrician only.

CAUTION: When using electrical equipment, basic safety precautions should always be followed including the following: Read all instructions carefully before installation and save


for future use. Make sure installation and all connections are in accordance with National Electrical Code and any local regulations. To avoid possible electrical shock, be sure that power supply is turned off before installing or servicing this fixture. Servicing should be performed by qualified service personnel.

These instructions do not claim to cover all details or variations. When additional information is desired, please contact your SPI representative.

Lightruss Rail - Cable Mount


Cable mounting installation:

1. Mount the upper cable gripper to ceiling or other structural support and insert cable. 1/4-20 stud, supplied by others.
2. Mount the lower cable gripper to the slider plate using the lock washer and jam nut.
3. Slide the slider plate into the extrusion.
4. Lower the cover plate over the slider plate.
5. Secure the slider plate in position by tightening the flat head screws down into the cover plate.

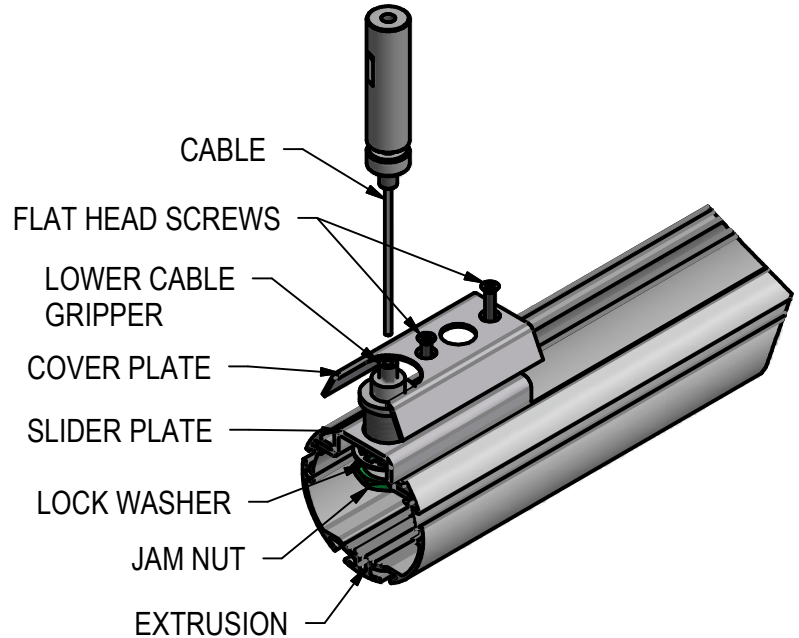

Splice bracket installation:

1. Slide half of the splice bracket into the extrusion and secure with hex head screws.
2. Slide the next piece of extrusion over the exposed half of the splice bracket and secure with hex head screws.
3. Note: A mounting assembly can be slid over the splice bracket if needed.

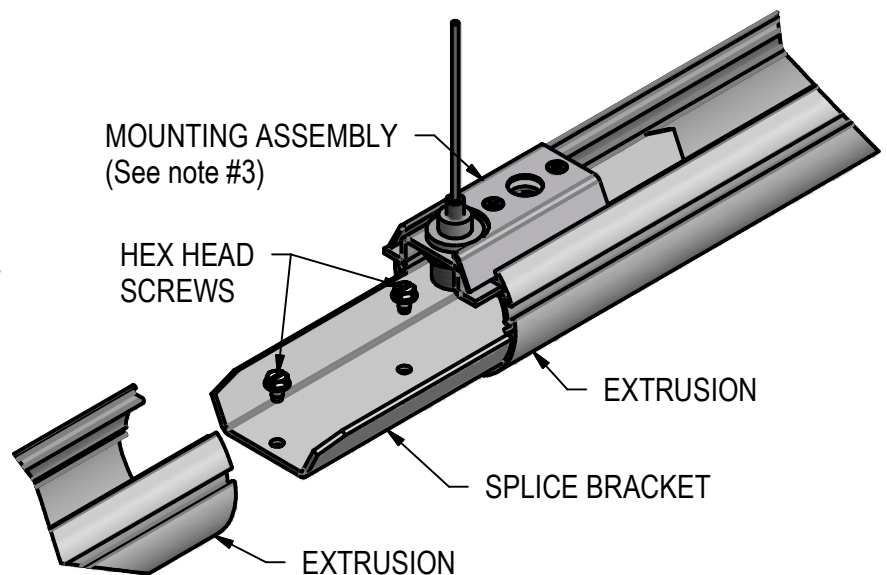

Rev.
11/24/2020
IS99555X