

IMPORTANT SAFETY AND INSTALLATION INSTRUCTIONS

WARNING: Risk of fire and electrical shock. This product is to be installed by a qualified electrician only.

CAUTION: When using electrical equipment, basic safety precautions should always be followed including the following: Read all instructions carefully before installation and save



for future use. Make sure installation and all connections are in accordance with National Electrical Code and any local regulations. To avoid possible electrical shock, be sure that power supply is turned off before installing or servicing this fixture. Servicing should be performed by qualified service personnel.

These instructions do not claim to cover all details or variations. When additional information is desired, please contact your SPI representative.

Lightruss Rail - Stem Mount - Page 1 of 2

Stem mounting installation:

1. Slide the canopy and swivel hanger down over the stem.
2. Insert stem thru the swivel ball so that one pin hole is on top.
3. Insert top clevis pins and secure with cotter pin.
4. Slide swivel hanger up to the swivel bar and insert lower clevis pin below swivel ball and hanger. Secure with cotter pin.
5. Secure swivel hanger to junction box with screws (by others)
6. Secure canopy to swivel hanger by pushing upward and twist to engage fastening device.

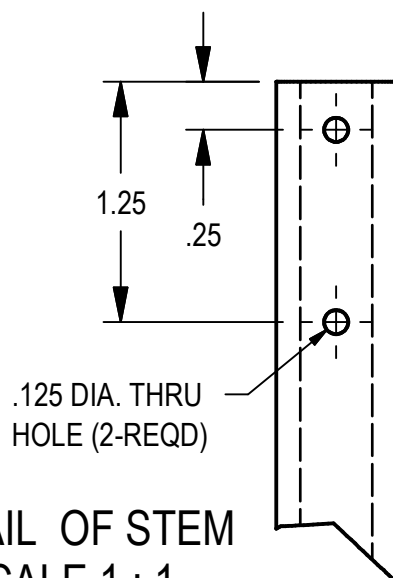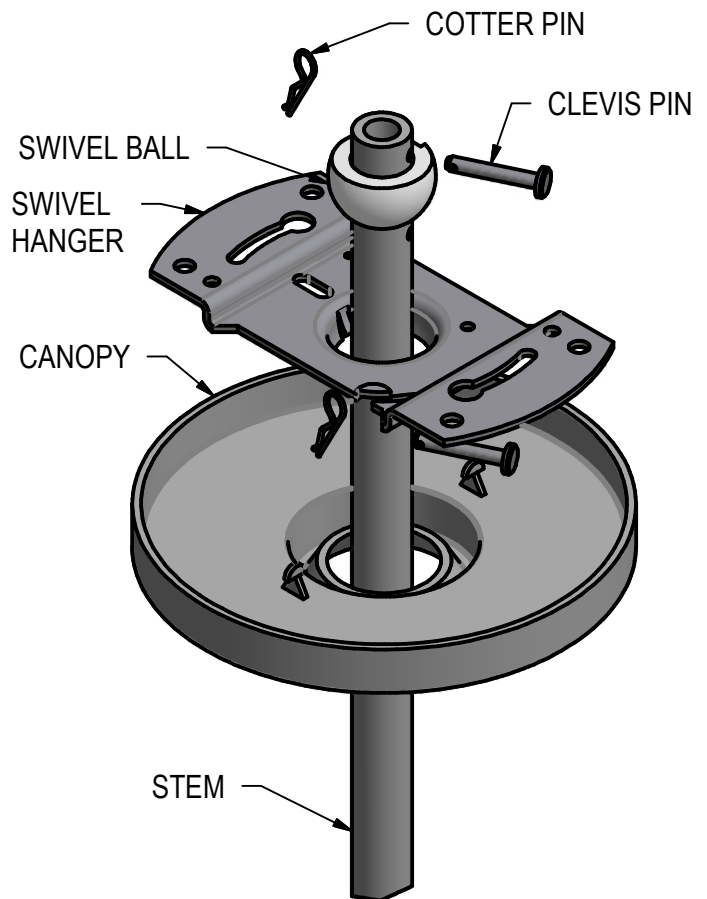

NOTE:

Electrical contractor may be required to cut stem due to varying ceiling heights and drill cotter pin holes.

See stem detail for more information

DETAIL OF STEM
SCALE 1 : 1

9/14/17
IS99556X

IMPORTANT SAFETY AND INSTALLATION INSTRUCTIONS

WARNING: Risk of fire and electrical shock. This product is to be installed by a qualified electrician only.

CAUTION: When using electrical equipment, basic safety precautions should always be followed including the following: Read all instructions carefully before installation and save


for future use. Make sure installation and all connections are in accordance with National Electrical Code and any local regulations. To avoid possible electrical shock, be sure that power supply is turned off before installing or servicing this fixture. Servicing should be performed by qualified service personnel.

These instructions do not claim to cover all details or variations. When additional information is desired, please contact your SPI representative.

Lightruss Rail - Stem Mount - Page 2 of 2


Stem mounting installation:

1. Insert stem thru the mounting block so that one pin hole is on top and one is on the bottom of the block.
2. Insert clevis pins and secure with cotter pins.
3. Slide stem mounting block into the extrusion and secure in place with the set screws.

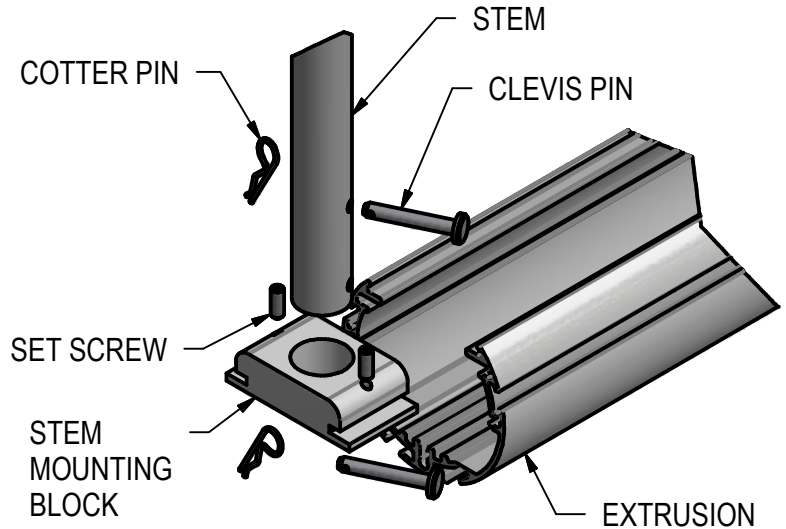

Splice bracket installation:

1. Slide half of the splice bracket into the extrusion and secure with hex head screws.
2. Slide the next piece of extrusion over the exposed half of the splice bracket and secure with hex head screws.
3. Note: A mounting assembly can be slid into the extrusion with the splice bracket if needed.

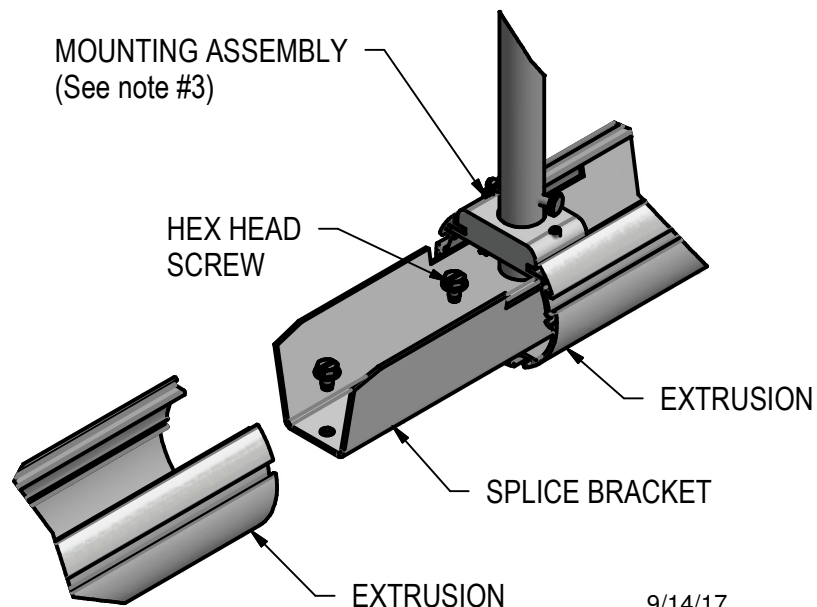

9/14/17
IS99556X