

IMPORTANT SAFETY AND INSTALLATION INSTRUCTIONS


WARNING: Risk of fire and electrical shock. This product is to be installed by a qualified electrician only.

CAUTION: When using electrical equipment, basic safety precautions should always be followed including the following: Read all instructions carefully before installation and save

for future use. Make sure installation and all connections are in accordance with National Electrical Code and any local regulations. To avoid possible electrical shock, be sure that power supply is turned off before installing or servicing this fixture. Servicing should be performed by qualified service personnel.

These instructions do not claim to cover all details or variations. When additional information is desired, please contact your SPI representative.

INTERIOR RECESSED WALL FIXTURE

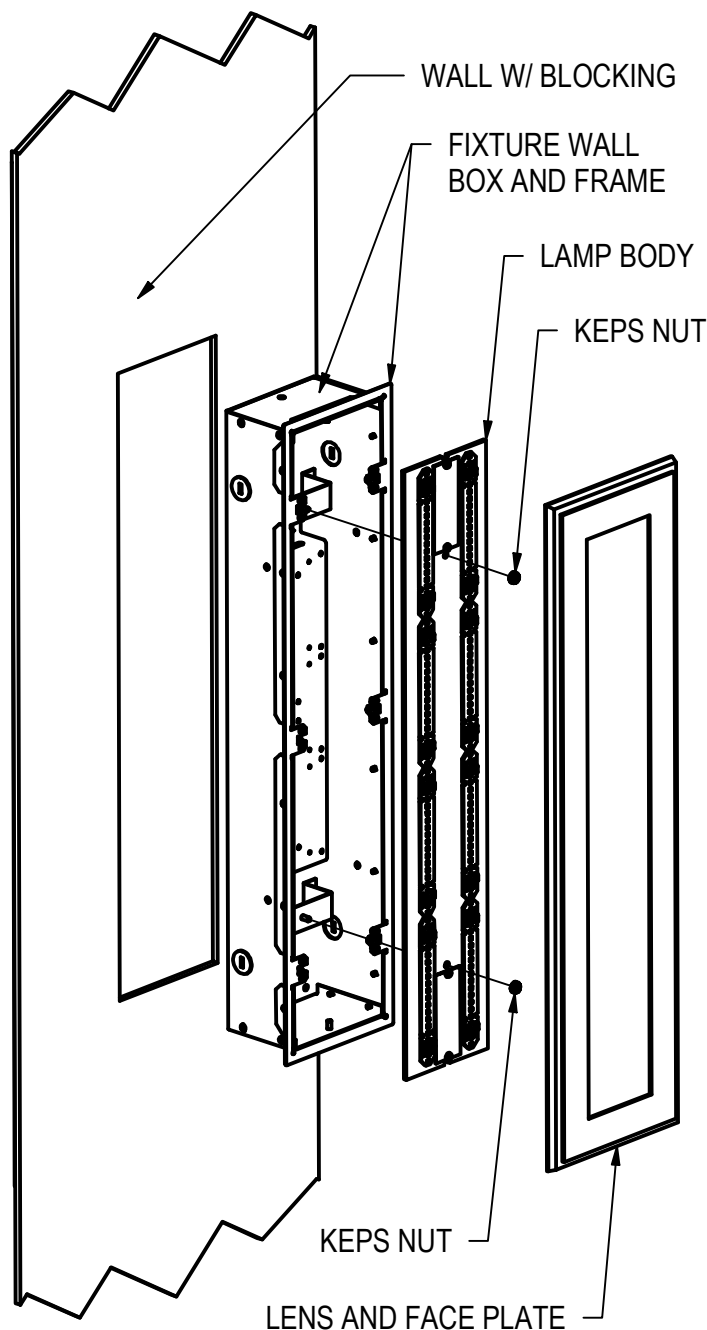

NOTE: BLOCKING IS REQUIRED TO SUPPORT FIXTURE

1. TURN POWER OFF
2. REMOVE FACE PLATE, (FIRMLY PULL LENS AWAY FROM FIXTURE BOX) SET ASIDE.
3. REMOVE LAMP BODY BY LOOSENING KEPS NUTS. SET ASIDE.
4. CONFIRM WHICH CUT OUT SIZE TO USE (SEE BOTTOM OF PAGE) CUT HOLE IN WALL
5. MAKE ELECTRICAL CONNECTIONS PER CODE. KNOCK OUTS PROVIDED
6. RE-SECURE LAMP BODY TO FIXTURE WALL BOX WITH PROVIDED KEP NUTS.
7. SLIDE FIXTURE BOX INTO CUT OUT. SECURE FIXTURE TO BLOCKING WITH SCREWS (SCREWS / BLOCKING BY OTHERS)
NOTE: FIXTURE FRAME SHOULD COVER RECTANGULAR CUT-OUT COMPLETELY.
8. INSTALL LAMP, TURN POWER ON & TEST.
9. RE-SECURE FACE PLATE TO FIXTURE. (LINE UP FACE PLATE STUDS TO FIXTURE MOUNTING CLIPS AND PUSH FIRMLY)

RECTANGULAR CUT-OUT DIMENSIONS

2 FOOT NOMINAL FIXTURES:	24.50" X 5.25"
3 FOOT NOMINAL FIXTURES:	36.50" X 5.25"
4 FOOT NOMINAL FIXTURES:	48.50" X 5.25"

MONET

11/8/21
IS62070X