

IMPORTANT SAFETY AND INSTALLATION INSTRUCTIONS

WARNING: Risk of fire and electrical shock. This product is to be installed by a qualified electrician only.


CAUTION: When using electrical equipment, basic safety precautions should always be followed including the following: Read all instructions carefully before installation and save

for future use. Make sure installation and all connections are in accordance with National Electrical Code and any local regulations. To avoid possible electrical shock, be sure that power supply is turned off before installing or servicing this fixture. Servicing should be performed by qualified service personnel.

These instructions do not claim to cover all details or variations. When additional information is desired, please contact your SPI representative.

FL,TH OR HID W/ REMOTE BALLAST, WET LOCATION INSTALLATION

STEP #1

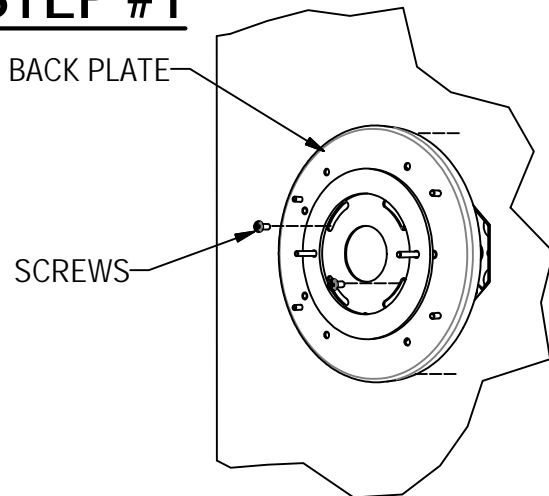


1. REMOVE FIXTURE MOUNTING BACK PLATE, BY REMOVING THE TWO LOCK NUTS AND RUBBER WASHERS FROM FIXTURE HEAD.
2. SECURE MOUNTING BACK PLATE TO J-BOX. (SCREWS BY OTHERS) **NOTE: LOCATE ORIENTATION LABEL ON BACK SIDE**

STEP #2


3. TO ENSURE PROPER SEALING FOR WET LOCATION RATING. SECURE FIXTURE TO WALL WITH (4) RUBBER WASHERS (SEE PROVIDED HARDWARE BAG) AND OWNER SUPPLIED ANCHORS. **DO NOT OVER TIGHTEN**

4. PULL WIRES FROM J-BOX THROUGH THE LARGE HOLE IN CENTER OF BACK PLATE.

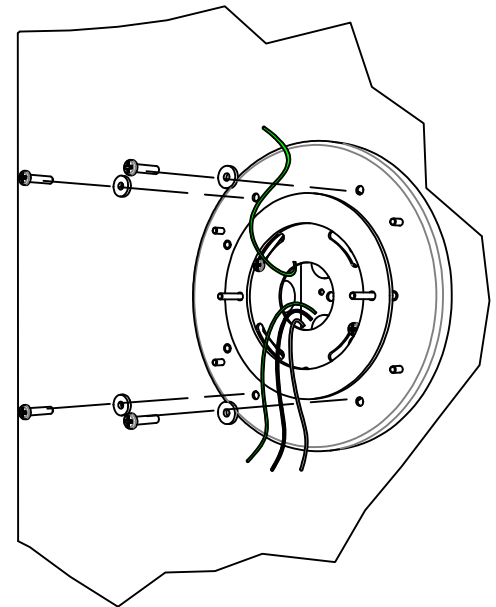

STEP #3

5. MAKE CONNECTS PER CODE.
6. RE-ASSEMBLE FIXTURE HEAD TO MOUNTING PLATE WITH THE TWO LOCK NUTS AND RUBBER WASHERS REMOVED ABOVE.
7. CHECK ALL SIX SCREW WITH RUBBER WASHERS TO MAKE SURE HOLES ARE SET PROPERLY TO SEAL FIXTURE FOR WET LOCATION.
8. APPLY A GENEROUS AMOUNT OF RTV (OR EQUIVLENT) AT THE BACK PLATE AND WALL TO SEAL OUT ALL WATER.

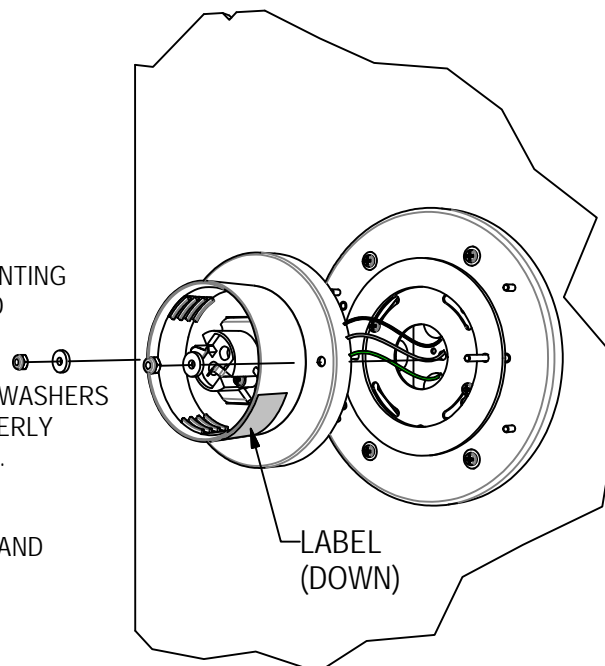

CAUTION !!

TO ENSURE SAFE AND RELIABLE OPERATION, IT IS IMPERATIVE THAT WHEN INSTALLING THIS FIXTURE THE LAMP WATTAGE ON THE HOUSING MATCHES THE WATTAGE OF THE BALLAST. SEE BACK SIDE OF HOUSING FOR LAMP WATTAGE AND TYPE. ENSURE THEY MATCH THE LABEL ON BALLAST FOR BALLAST RATING.

12/4/13
IS55182X