

IMPORTANT SAFETY AND INSTALLATION INSTRUCTIONS

WARNING: Risk of fire and electrical shock. This product is to be installed by a qualified electrician only.



CAUTION: When using electrical equipment, basic safety precautions should always be followed including the following: Read all instructions carefully before installation and save

for future use. Make sure installation and all connections are in accordance with National Electrical Code and any local regulations. To avoid possible electrical shock, be sure that power supply is turned off before installing or servicing this fixture. Servicing should be performed by qualified service personnel.

These instructions do not claim to cover all details or variations. When additional information is desired, please contact your SPI representative.

24" AND 32" PENDANTS

NOTE: FIXTURE MUST BE MOUNTED OR SUPPORTED INDEPENDENTLY OF THE JUNCTION BOX.

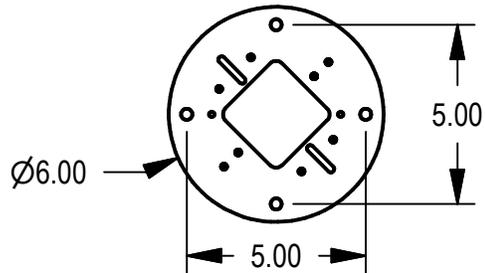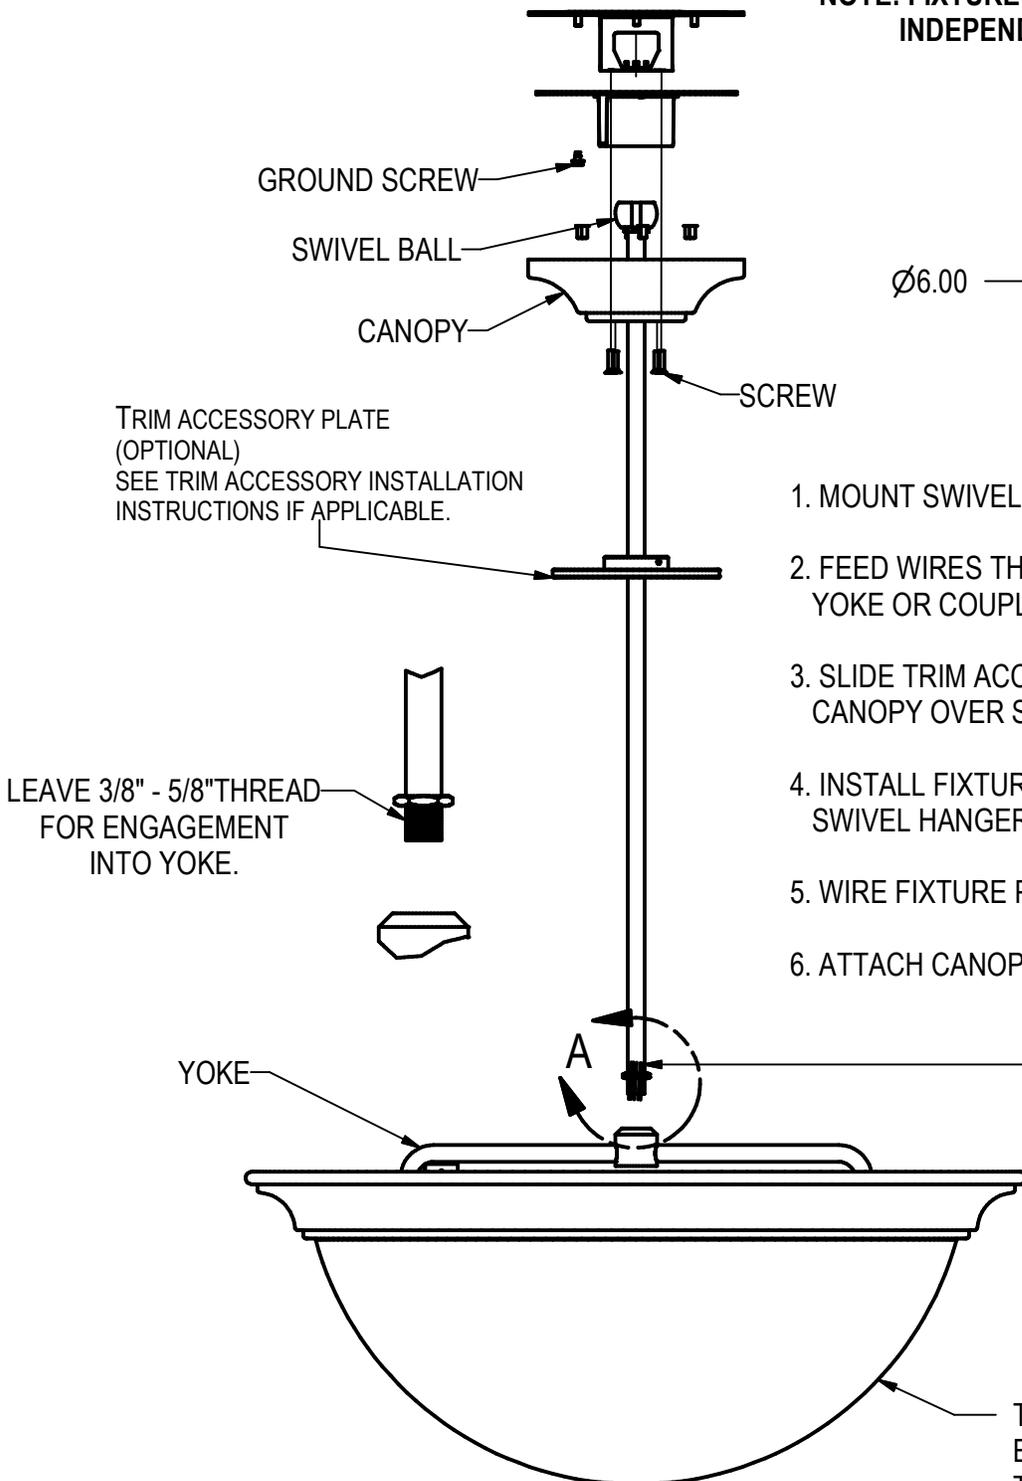

MOUNTING DETAIL

1. MOUNT SWIVEL HANGER (HARDWARE BY OTHERS)
2. FEED WIRES THROUGH STEM AND THREAD STEM INTO YOKE OR COUPLER. SECURE WITH LOCK NUT.
3. SLIDE TRIM ACCESSORY PLATE (IF APPLICABLE) AND CANOPY OVER STEM. ATTACH SWIVEL BALL TO STEM.
4. INSTALL FIXTURE BY SLIDING SWIVEL BALL INTO SWIVEL HANGER. TAKE CARE NOT TO DAMAGE WIRES.
5. WIRE FIXTURE PER CODE.
6. ATTACH CANOPY WITH SCREWS PROVIDED.

LEAD WIRES:
 UPLIGHT LEAD: BLACK
 UPLIGHT COMMON: WHITE
 DOWNLIGHT LEAD: BLUE
 DOWNLIGHT COMMON: GRAY
 Color and quantity may vary depending on Optional Switching, Dimming, and Emergency Options

TYPICAL FIXTURE
 BOWL SHAPE AND
 TRIM STYLE MAY VARY

12/2/13
 EC 08-068
 IS42857X