

IMPORTANT SAFETY AND INSTALLATION INSTRUCTIONS

WARNING: Risk of fire and electrical shock. This product is to be installed by a qualified electrician only.


CAUTION: When using electrical equipment, basic safety precautions should always be followed including the following: Read all instructions carefully before installation and save

for future use. Make sure installation and all connections are in accordance with National Electrical Code and any local regulations. To avoid possible electrical shock, be sure that power supply is turned off before installing or servicing this fixture. Servicing should be performed by qualified service personnel.


These instructions do not claim to cover all details or variations. When additional information is desired, please contact your SPI representative.

ASHLAND PENDANT MOUNT INSTALLATION

FIGURE 1

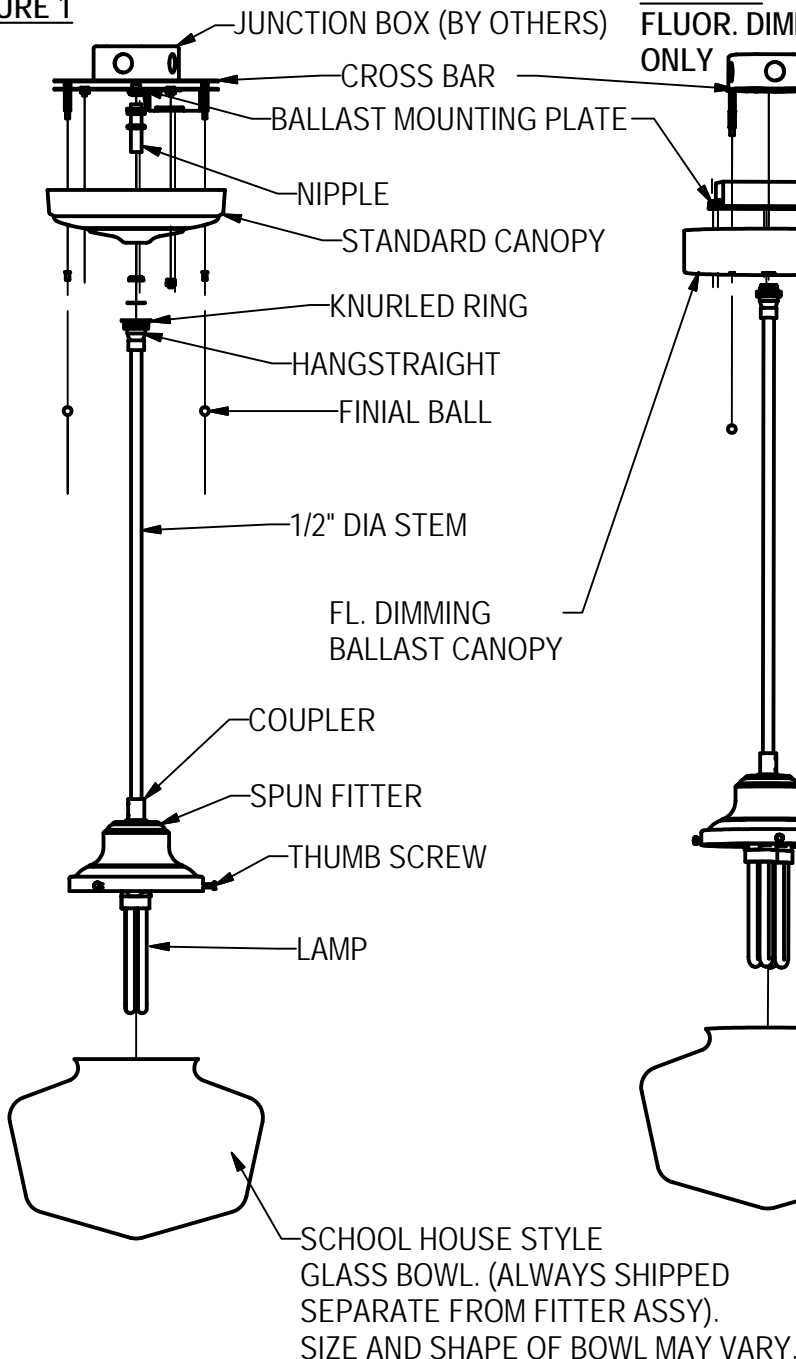

**FIGURE 2
FLUOR. DIMMING
ONLY**

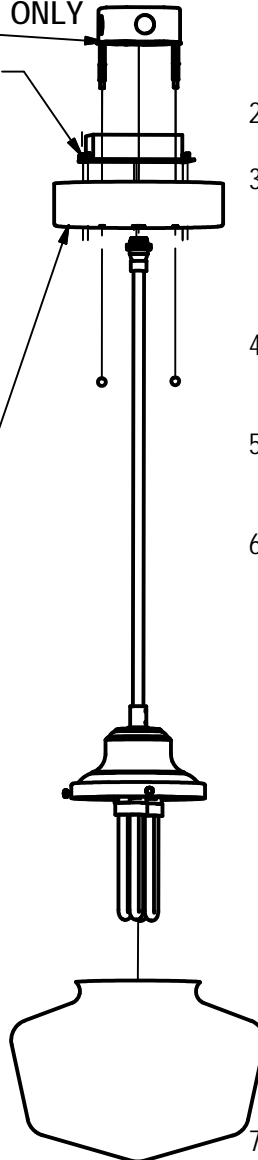

ASSEMBLY INSTRUCTIONS

- 1.) ATTACH STEM TO COUPLER. TIGHTEN TOP SET SCREW ON COUPLER TO LOCK STEM IN PLACE.
- 2.) FEED WIRING THRU CANOPY.
- 3.) LOOSEN KNURLED RING ON HANGSTRAIGHT TO ALLOW CANOPY TO SLIDE DOWN STEM. (CAREFUL NOT TO SCRATCH STEM)
- 4.) ATTACH HANGSTRAIGHT TO PIPE NIPPLE.
- 5.) ATTACH CROSSBAR TO JUNCTION BOX. (HARDWARE BY OTHERS)
- 6.) INCANDESCENT FIXTURES:
CONNECT FIXTURE WIRING TO BRANCH CIRCUIT WIRING (QUALIFIED ELECTRICIAN)
- FLUORESCENT FIXTURES:
CONNECT LAMP WIRING TO BALLAST WIRING. (FOLLOW COLOR SCHEME)
CONNECT BALLAST POWER WIRING TO BRANCH CIRCUIT WIRING (QUALIFIED ELECTRICIAN)
- METAL HALIDE FIXTURES:
LAMP WIRING MUST BE CONNECTED TO THE REMOTE MOUNTED BALLAST PROVIDED. WIRING INSTRUCTIONS CAN BE FOUND ON THE BALLAST MANUFACTURER'S LABEL. (BY A QUALIFIED ELECTRICIAN)
- 7.) SLIDE CANOPY BACK UP STEM AND SECURE IN PLACE WITH KNURLED RING (CAREFUL NOT TO SCRATCH STEM)
- 8.) INSTALL LAMP AS REQUIRED
- 9.) ATTACH GLASS BOWL USING (3) 8-32 X .75 LONG FITTER SCREWS PROVIDED.

12/19/13
IS56579X