

IMPORTANT SAFETY AND INSTALLATION INSTRUCTIONS


WARNING: Risk of fire and electrical shock. This product is to be installed by a qualified electrician only.

CAUTION: When using electrical equipment, basic safety precautions should always be followed including the following: Read all instructions carefully before installation and save

for future use. Make sure installation and all connections are in accordance with National Electrical Code and any local regulations. To avoid possible electrical shock, be sure that power supply is turned off before installing or servicing this fixture. Servicing should be performed by qualified service personnel.

These instructions do not claim to cover all details or variations. When additional information is desired, please contact your SPI representative.

HUB ASSEMBLY INSTALLATION

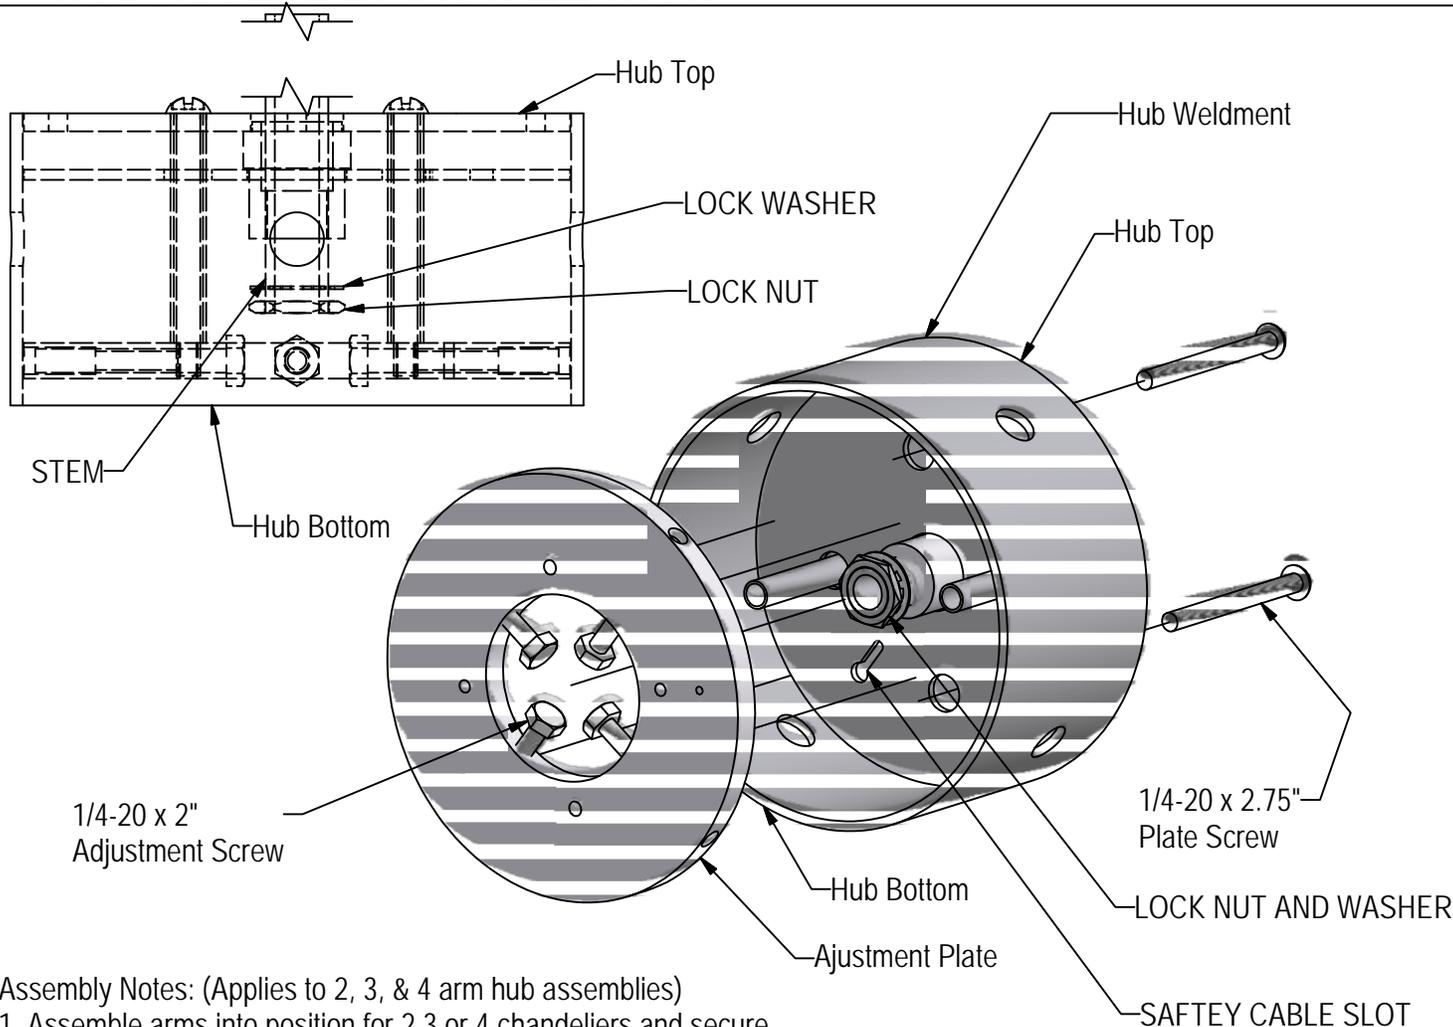

Assembly Notes: (Applies to 2, 3, & 4 arm hub assemblies)

1. Assemble arms into position for 2,3,or 4 chandeliers and secure.
2. Complete wiring connections.
3. BE SURE LOCK NUT AND WASHER ARE SECURED TO STEM AND SAFTEY CABLE IS SECURED IN SLOT.
3. Insert Adjustment plate from bottom of hub and rest up to cover screw tubes.
4. Insert (2) 2-3/4 X 2.75" screws in top of Hub as shown and secure Adjustment plate by lining up with the 1/4-20 threaded holes.
5. Upon fixture installation tighten 2,3, or 4 adjuster screws, depending on cluster qty, until snug on inside of hub. (for 2 arm hub assemblies verify the two adjuster screws align with hub arms).
6. Adjust screws until chandelier arms are at a level position. (1 to 2 turns of the adjuster screws should be adequate for leveling adjustment).
7. Secure decorative hub cover with (2) phillips head screws from top of hub through the tube access (not shown).

Rev2
-12/5/13
IS46489X