

IMPORTANT SAFETY AND INSTALLATION INSTRUCTIONS

WARNING: Risk of fire and electrical shock. This product is to be installed by a qualified electrician only.

CAUTION: When using electrical equipment, basic safety precautions should always be followed including the following: Read all instructions carefully before installation and save

for future use. Make sure installation and all connections are in accordance with National Electrical Code and any local regulations. To avoid possible electrical shock, be sure that power supply is turned off before installing or servicing this fixture. Servicing should be performed by qualified service personnel.


These instructions do not claim to cover all details or variations. When additional information is desired, please contact your SPI representative.

OSAGE WALL MOUNT

INSTALLATION NOTES:

- [A] Loosen (2) knurl nuts from inside fixture to remove main housing cover.
- [B] Attach universal crossbar to junction box (by others).
- [C] Make all necessary wire connections.
- [D] Position fixture in place over mounting crossbar and secure with (2) knurl nuts.
- [E] Carefully relamp fixture, which must be per replacement label.
- [F] Guide main housing cover back in place and secure with knurl nuts.

NOTE:
FLUORESCENT SHOWN
MAY BE INCANDESCENT

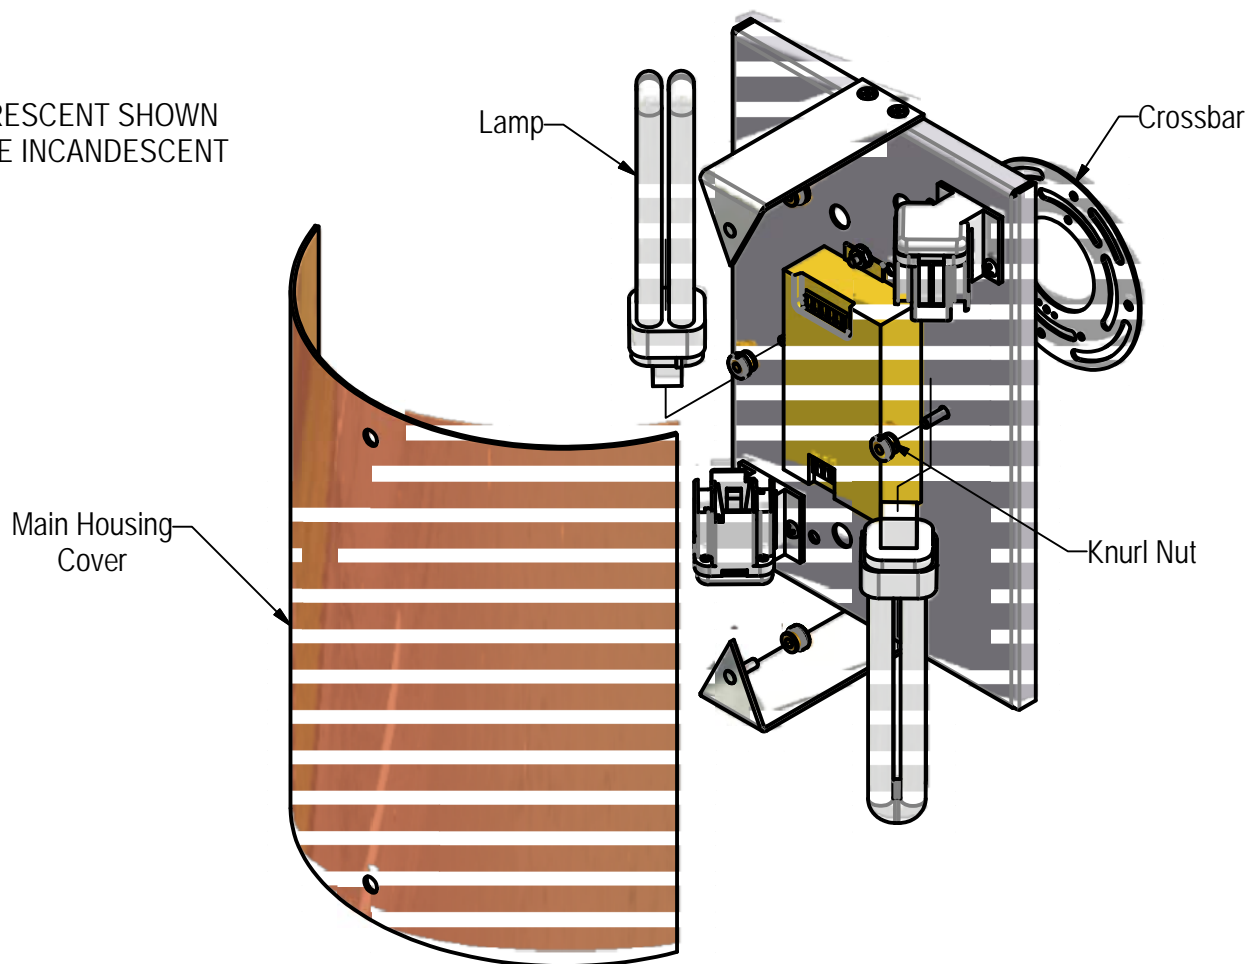

12/13/13
IS52240X