

IMPORTANT SAFETY AND INSTALLATION INSTRUCTIONS


WARNING: Risk of fire and electric shock. This product is to be installed by a qualified electrician only.

CAUTION: When using electrical equipment, basic safety precautions should always be followed including the following: Read all instructions carefully before installation and save

for future use. Make sure installation and all connections are in accordance with National Electrical Code and any local regulations. To avoid possible electrical shock, be sure that power supply is turned off before installing or servicing this fixture. Servicing should be performed by qualified service personnel.

These instructions do not claim to cover all details or variations. When additional information is desired, please contact your SPI representative.

CEILING MOUNT FIXTURE

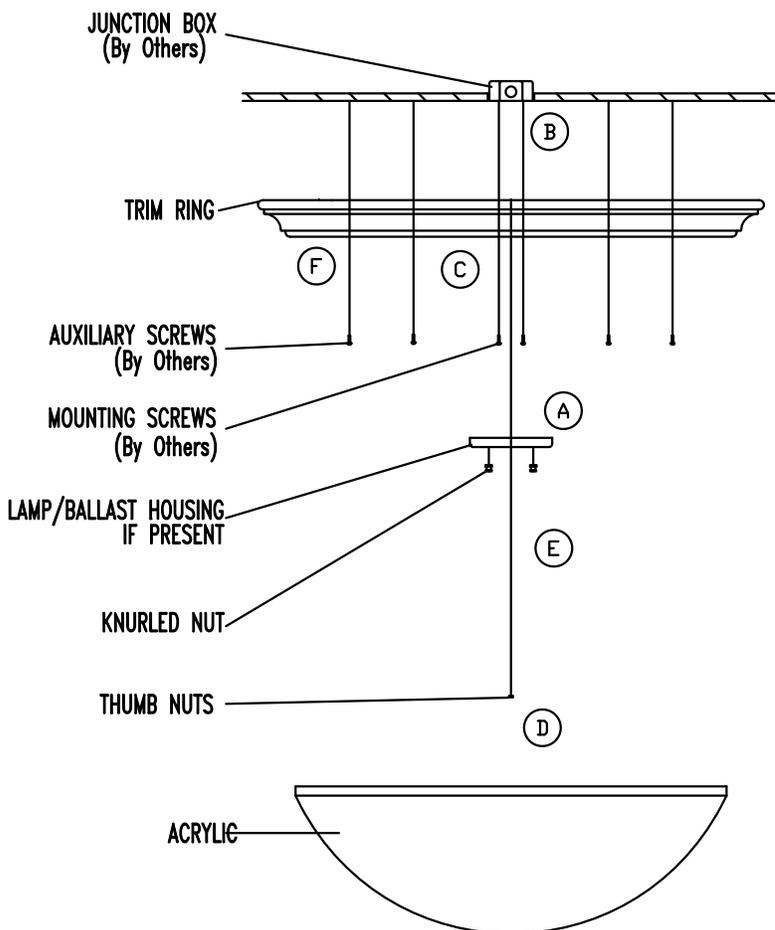

1. REMOVE ACRYLIC FROM FIXTURE BY ROTATING COUNTER-CLOCKWISE APPROX 1" AND PULL.
2. REMOVE BRASS KNURLED NUTS AND REMOVE LAMP/BALLAST HOUSING COVER (IF PRESENT)
3. FEED SUPPLY LEAD WIRES THROUGH TRIM RING. CENTER AND MOUNT TRIM RING TO EARS OF JUNCTION BOX WITH SCREWS (BY OTHERS). IF NEEDED, INSTALL AUXILIARY SCREWS (BY OTHERS).
4. WIRE FIXTURE.
5. RE-INSTALL AND TIGHTEN LAMP/BALLAST HOUSING COVER (IF PRESENT).
6. INSTALL LAMPS.
7. INSTALL ACRYLIC BY ALIGNING NOTCHES IN ACRYLIC TO SPING CLIPS AND ROTATE CLOCKWISE UNTIL FULLY ENGAGED.

****NOTE:** Fixture provided with auxiliary mounting holes to mount independent of J-Box. Mounting holes must be used on fixtures weighing 25LBS or more in Canada (CUL), and 50 LBS in US (UL). **

11/26/13
IS43066X