

# IMPORTANT SAFETY AND INSTALLATION INSTRUCTIONS


**WARNING:** Risk of fire and electrical shock. This product is to be installed by a qualified electrician only.

**CAUTION:** When using electrical equipment, basic safety precautions should always be followed including the following: Read all instructions carefully before installation and save

for future use. Make sure installation and all connections are in accordance with National Electrical Code and any local regulations. To avoid possible electrical shock, be sure that power supply is turned off before installing or servicing this fixture. Servicing should be performed by qualified service personnel.

These instructions do not claim to cover all details or variations. When additional information is desired, please contact your SPI representative.

## BOWL TO ARM INSTALLATION (TOP MOUNT TYPE)

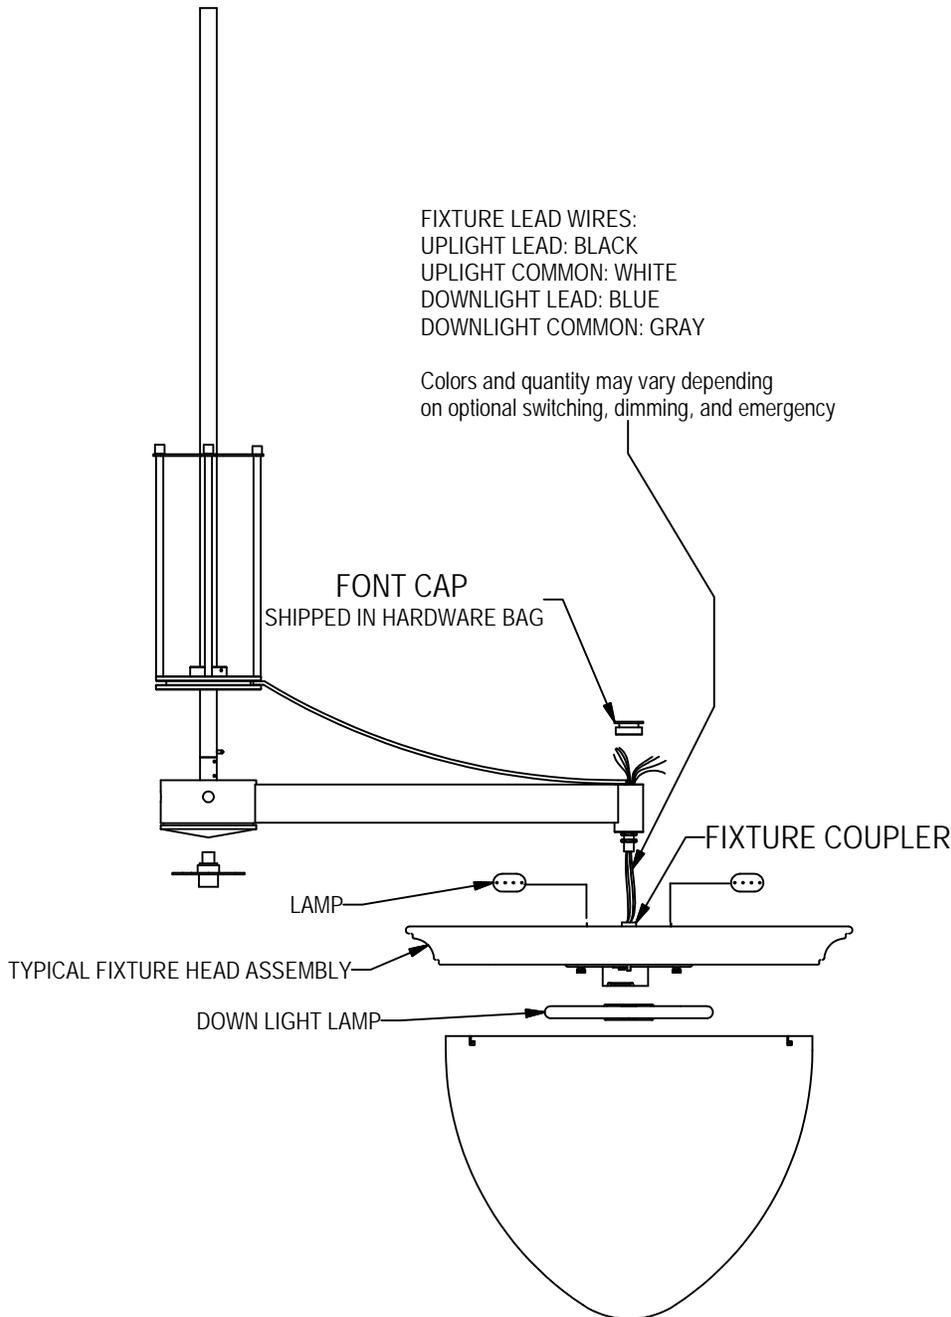

1. Feed lead wires from the pipe coupler on the fixture head through the pipe nipple at the base of the font.
2. Secure the fixture head to the fixture arm by rotating the fixture head in a clock-wise rotation so the pipe nipple threads into the coupler on the fixture. Lock fixture in place with lock nut on pipe nipple or set screw in coupler.
3. Make connections per code
4. Carefully push wires down into the splice compartment of font.
5. Attach the font cap (shipped in hardware bag) to the top of the font by turning the cap in a clock-wise rotation.
6. See additional installation instructions for Canopy installation and fixture Installation.

Note: Optional trim accessories shown.  
Trim style, lamp configuration and bowl type may vary.

12/12/13  
IS49828X