

# IMPORTANT SAFETY AND INSTALLATION INSTRUCTIONS


**WARNING:** Risk of fire and electrical shock. This product is to be installed by a qualified electrician only.

**CAUTION:** When using electrical equipment, basic safety precautions should always be followed including the following: Read all instructions carefully before installation and save

for future use. Make sure installation and all connections are in accordance with National Electrical Code and any local regulations. To avoid possible electrical shock, be sure that power supply is turned off before installing or servicing this fixture. Servicing should be performed by qualified service personnel.


These instructions do not claim to cover all details or variations. When additional information is desired, please contact your SPI representative.

## SENECA™ PENDANT

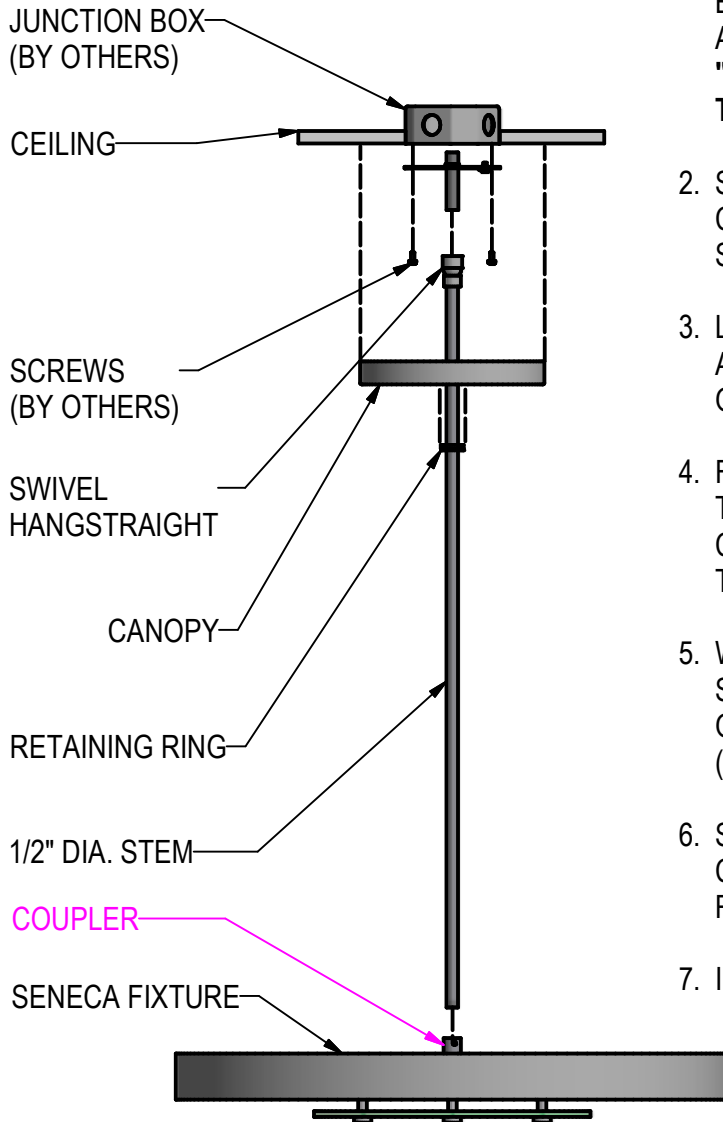

**NOTE:** THIS FIXTURE MUST BE MOUNTED OR SUPPORTED INDEPENDENTLY OF THE JUNCTION-BOX.

1. FEED FIXTURE WIRES ON TOP OF FIXTURE INTO THE BOTTOM OF THE STEM AND UP THROUGH THE ATTACHED HANGSTRAIGHT AND RETAINING RING. **"NOTE: COUPLER AT TOP OF HOUSING THAT STEM THREADS ONTO IS ATTACHED TO FIXTURE."**
2. SECURE THE THREADED SIDE OF THE STEM TO THE COUPLER AT THE TOP OF THE FIXTURE AND TIGHTEN SET SCREW.
3. LOOSEN THE RETAINING RING ON THE HANG-STRAIGHT AND SLIDE IT DOWN OVER THE STEM. SLIDE CANOPY OVER THE HANG-STRAIGHT AND DOWN THE STEM.
4. FEED THE WIRES NOW AT THE HANG-STRAIGHT THROUGH THE PIPE NIPPLE IN THE MOUNTING CROSSBAR & SECURE CROSSBAR AND PIPE NIPPLE TO HANG-STRAIGHT.
5. WITH GROUND SCREW (PROVIDE) HEAD DOWN SECURE THE MOUNTING CROSSBAR TO THE EARS OF THE JUNCTION BOX (BY OTHERS) WITH SCREWS (BY OTHERS). MAKE WIRE CONNECTIONS PER CODE.
6. SLIDE CANOPY UP TO COVER JUNCTION BOX AND CROSS BAR, AND SECURE IN PLACE BY SCREWING RETAINING RING BACK ONTO THE HANG-STRAIGHT.
7. INSTALL LAMPS

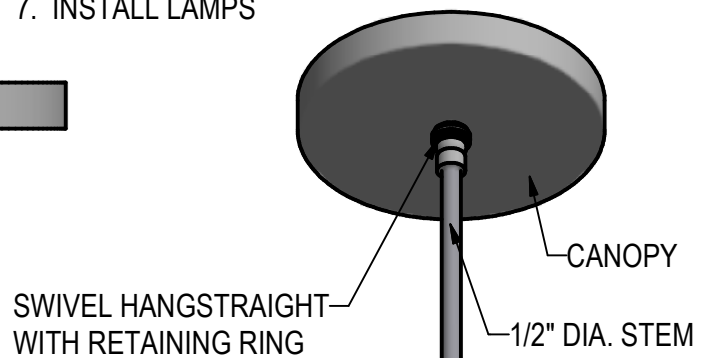

12/30/13  
IS46198X