

IMPORTANT SAFETY AND INSTALLATION INSTRUCTIONS


WARNING: Risk of fire and electrical shock. This product is to be installed by a qualified electrician only.

CAUTION: When using electrical equipment, basic safety precautions should always be followed including the following: Read all instructions carefully before installation and save

for future use. Make sure installation and all connections are in accordance with National Electrical Code and any local regulations. To avoid possible electrical shock, be sure that power supply is turned off before installing or servicing this fixture. Servicing should be performed by qualified service personnel.

These instructions do not claim to cover all details or variations. When additional information is desired, please contact your SPI representative.

SAVANNAH PENDANT 45° SWIVEL CANOPY

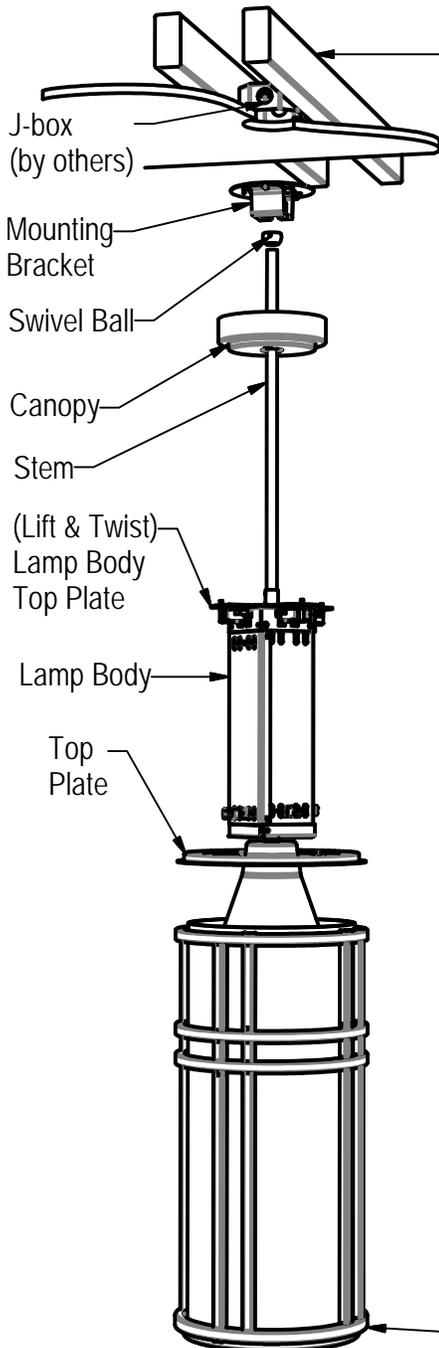

Auxiliary Structural Mounting - Because fixture weight may exceed the structural capacity of a standard electrical box, additional structural mounting is required (by others.) **Note:** Mounting bracket has two mounting slots for auxiliary support.

STEP 1: Remove housings top plate by removing four pan head screws at the top rings outer perimeter. Slide lamp body into fixture and re-attach top plate.

STEP 2: Feed fixture lead wires through stem, and thread stem into coupler. Tighten coupler set screws. Slide canopy over stem and install swivel ball.

STEP 3: Secure the mounting bracket to the J-box and auxiliary support with two screws through two of the four 1/4" dia. holes (for J-box) and two screws through the two mounting slots (for auxiliary support).

STEP 4: Hang the stem in the mounting bracket, taking care not to pinch or cut wires in mounting bracket.

STEP 5: Make electrical connections per code.

STEP 6: Slide canopy up stem to mounting bracket and secure with two flat head screws (provided).

STEP 7: Lift and twist fixture housing so the tabs disengage from the top plate slots. Once the housing can clear the lamp body top plate, lower the housing.

STEP 8: Insert lamps, making sure to insert lamps into the lamp support clips. Reinstall housing by lifting and twisting housing to engage the housing tabs with the slots located in the lamp body top plate.

STEP 9: For relamping/lamping down light, access lamp through bottom of the fixture. Raising and lowering the housing is not required.

Housing - Note: Housing appearance may differ.

12/5/13
IS47195X