

# IMPORTANT SAFETY AND INSTALLATION INSTRUCTIONS

**WARNING:** Risk of fire and electrical shock. This product is to be installed by a qualified electrician only.

**CAUTION:** When using electrical equipment, basic safety precautions should always be followed including the following: Read all instructions carefully before installation and save


for future use. Make sure installation and all connections are in accordance with National Electrical Code and any local regulations. To avoid possible electrical shock, be sure that power supply is turned off before installing or servicing this fixture. Servicing should be performed by qualified service personnel.

These instructions do not claim to cover all details or variations. When additional information is desired, please contact your SPI representative.

---


## BRK - FIXED BRACKET MOUNT

---

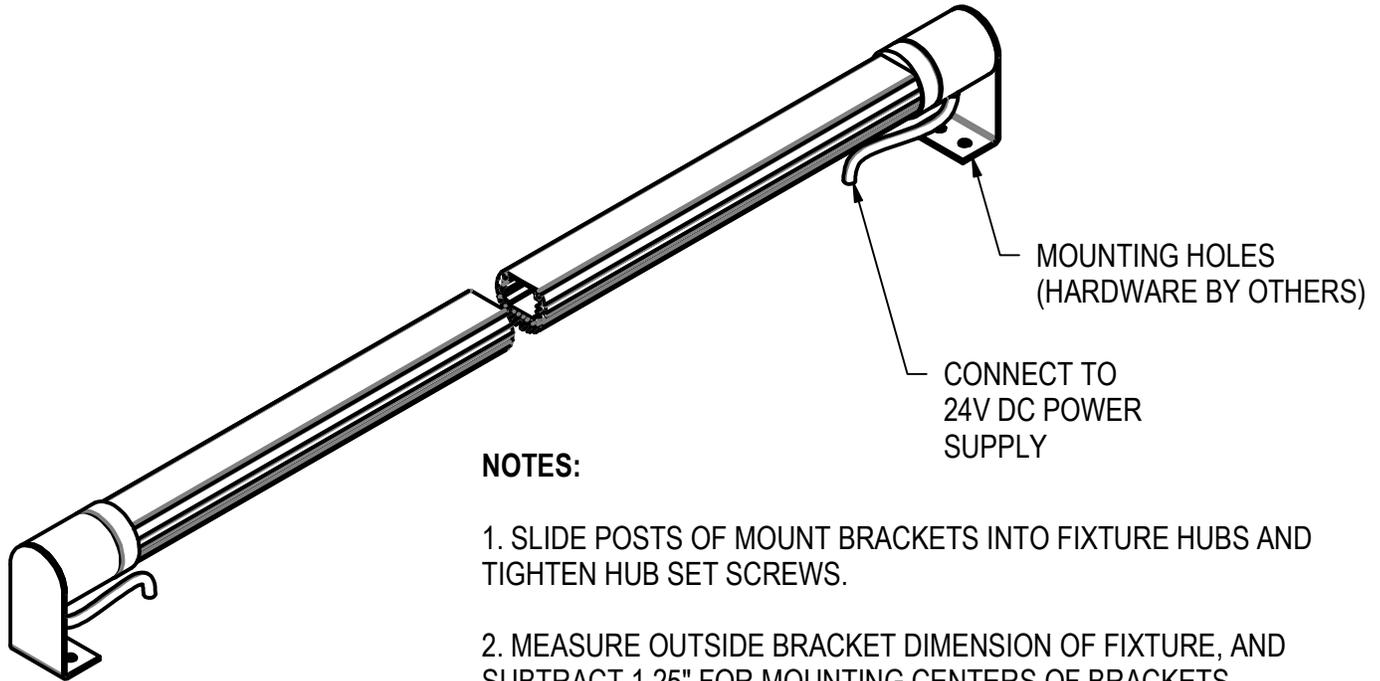

### NOTES:

1. SLIDE POSTS OF MOUNT BRACKETS INTO FIXTURE HUBS AND TIGHTEN HUB SET SCREWS.
2. MEASURE OUTSIDE BRACKET DIMENSION OF FIXTURE, AND SUBTRACT 1.25" FOR MOUNTING CENTERS OF BRACKETS.
3. MOUNT BRACKETS TO MOUNTING SURFACE WITH HARDWARE (SUPPLIED BY OTHERS).
4. LOOSEN HUB SET SCREWS AND POSITION HOUSING TO DESIRED BEAM ANGLE. TIGHTEN HUB SET SCREWS.
5. IF FIXTURE HAS MORE THAN ONE SET OF LEADS EXITING FROM FIXTURE. EACH LEAD MUST BE CONNECTED TO AN INDIVIDUAL CLASS II POWER SUPPLY. YOU CAN NOT CONNECT MORE THAN ONE SET OF LEADS TO A POWER SUPPLY. SEE CLASS TWO WIRING DIAGRAM.

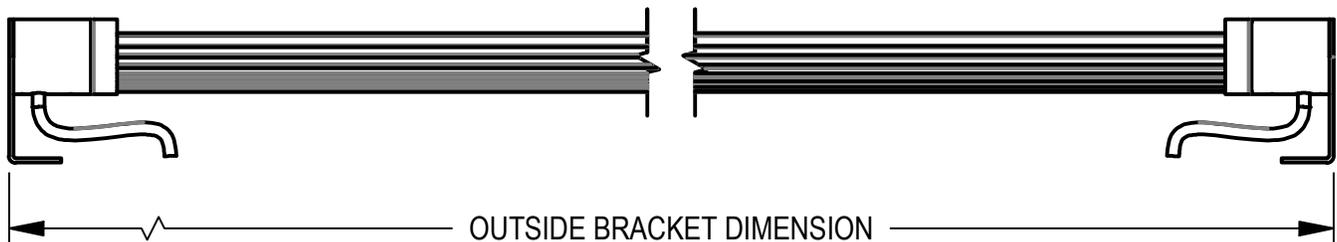

3/15/22  
IS64766X