

IMPORTANT SAFETY AND INSTALLATION INSTRUCTIONS


WARNING: Risk of fire and electrical shock. This product is to be installed by a qualified electrician only.

CAUTION: When using electrical equipment, basic safety precautions should always be followed including the following: Read all instructions carefully before installation and save

for future use. Make sure installation and all connections are in accordance with National Electrical Code and any local regulations. To avoid possible electrical shock, be sure that power supply is turned off before installing or servicing this fixture. Servicing should be performed by qualified service personnel.

These instructions do not claim to cover all details or variations. When additional information is desired, please contact your SPI representative.

BRACE - SWITCH BOX COVER (WET LISTED - INTEGRAL BALLAST)

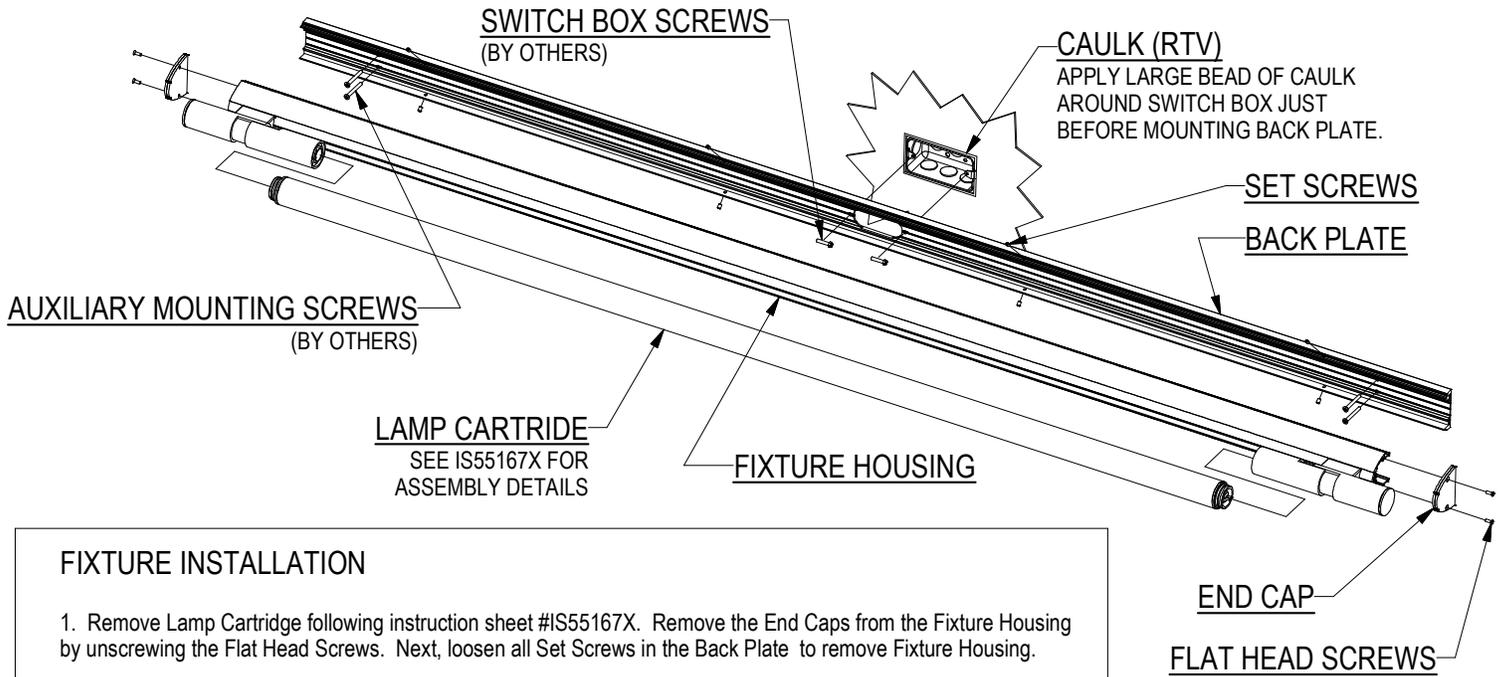

FIXTURE INSTALLATION


1. Remove Lamp Cartridge following instruction sheet #IS55167X. Remove the End Caps from the Fixture Housing by unscrewing the Flat Head Screws. Next, loosen all Set Screws in the Back Plate to remove Fixture Housing.
2. Fixture must use Auxiliary Mounting Screws (by others). Drill holes into Back Plate per AUXILIARY MOUNTING detail shown below. Use drill guide grooves and align holes with structural blocking and/or anchors in wall.
3. Apply a large bead of Caulk (RTV) around switch box. Bead should be tall enough to completely seal between Back Plate and wall. While Caulk is still wet, mount Back Plate over Switch Box using the Switch Box Screws (by others.) Next, attach the Auxiliary Mounting Screws (by others.) If needed, shim between Back Plate and wall to keep Back Plate straight. Securely tighten all mounting screws. Apply Caulk (RTV) over the Auxiliary Mounting Screws to prevent water from entering Fixture.
4. Hold Fixture Housing near Back Plate and make all necessary wire connections per local code. Neatly tuck all wires into Fixture Housing and then slide Fixture Housing over Back Plate. Be carefull not to pinch any wires. Use the Set Screws to secure Fixture Housing to Back Plate. Tighten all Set Screws to compress gaskets. Attach both End Caps to the Fixture Housing using the Flat Head Screws.
5. Install Lamp Cartridge per instruction sheet #IS55167X. Test Fixture for proper operation.

2.00 MIN
8.00 MAX

2.00 MIN
8.00 MAX

DRILL HOLES FOR AUXILIARY MOUNTING SCREWS (BY OTHERS.)
(4) HOLES REQUIRED

AUXILIARY MOUNTING



SECTION A-A

12/1/11
IS55885X