

IMPORTANT SAFETY AND INSTALLATION INSTRUCTIONS

WARNING: Risk of fire and electrical shock. This product is to be installed by a qualified electrician only.

CAUTION: When using electrical equipment, basic safety precautions should always be followed including the following: Read all instructions carefully before installation and save


for future use. Make sure installation and all connections are in accordance with National Electrical Code and any local regulations. To avoid possible electrical shock, be sure that power supply is turned off before installing or servicing this fixture. Servicing should be performed by qualified service personnel.

These instructions do not claim to cover all details or variations. When additional information is desired, please contact your SPI representative.

DARBY LENS INSTALLATION

NOTES:

1. UNSECURE MAIN HOUSING SAFETY CABLES FROM TOP PLATE, THEN REMOVE KNURL NUTS TO DROP MAIN HOUSING.
2. LIFT, TWIST AND LOWER MAIN HOUSING AWAY FROM FIXTURE AND SET ASIDE.
3. REMOVE HOLE PLUG FROM CENTER MOUNTING BRACKET, THEN REMOVE CENTER HOUSING CABLES FROM BRACKET.
4. RUN CENTER HOUSING CABLES THRU SLOTS IN LENS AND ALLOW LENS TO REST ON TOP OF CENTER HOUSING.
5. REPLACE CENTER HOUSING CABLES INTO CENTER BRACKET AND REPLACE HOLE PLUG.
6. RAISE MAIN HOUSING AND SECURE WITH KNURL NUTS. ENSURE THAT SAFETY CABLES ARE RE-ATTACHED.
7. NOTE: FOR 3 TIERED DARBY VERSION, ENSURE THAT SLOTS IN LENS ARE LINED UP WITH (3) CENTER CABLES AS WELL AS (4) OUTER CABLES.

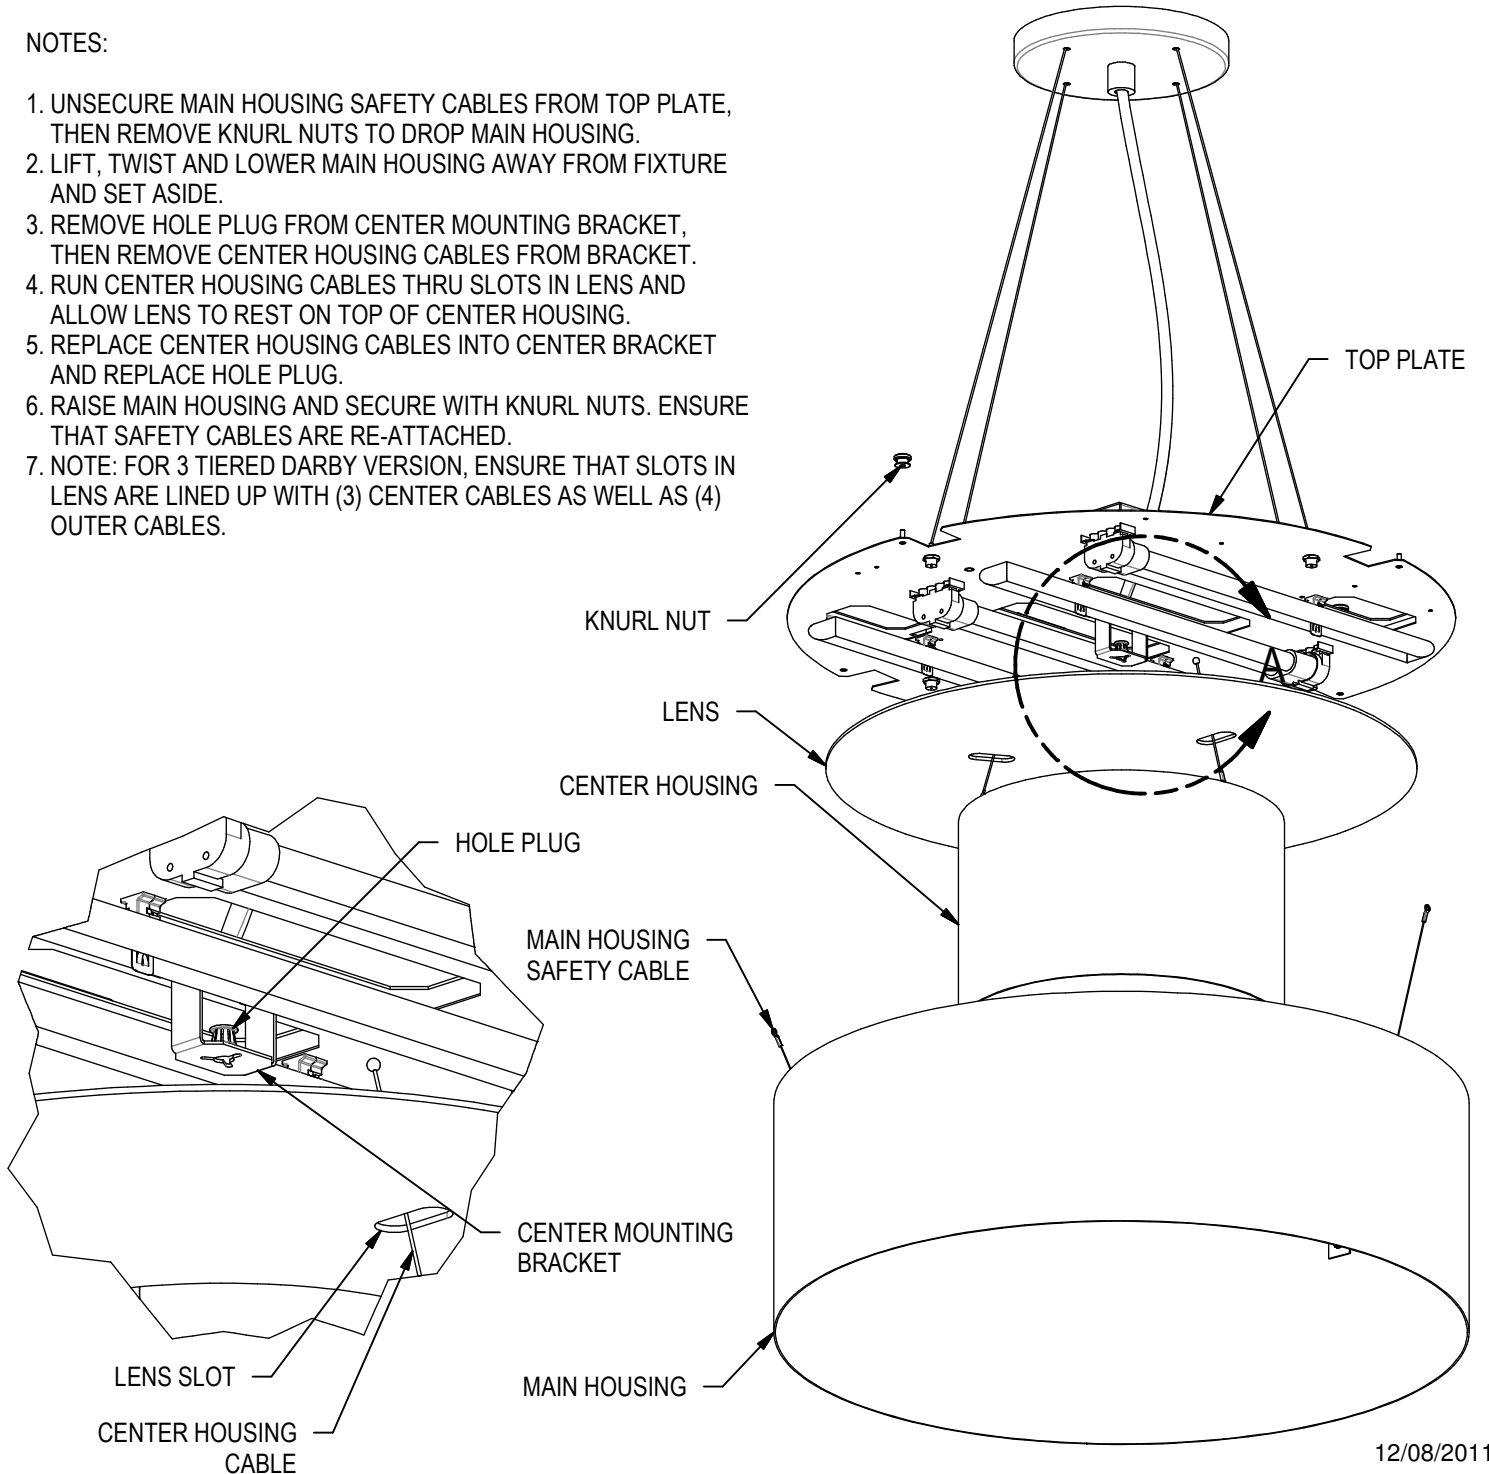

12/08/2011
IS74129X