

IMPORTANT SAFETY AND INSTALLATION INSTRUCTIONS

WARNING: Risk of fire and electrical shock. This product is to be installed by a qualified electrician only.

CAUTION: When using electrical equipment, basic safety precautions should always be followed including the following: Read all instructions carefully before installation and save


for future use. Make sure installation and all connections are in accordance with National Electrical Code and any local regulations. To avoid possible electrical shock, be sure that power supply is turned off before installing or servicing this fixture. Servicing should be performed by qualified service personnel.

These instructions do not claim to cover all details or variations. When additional information is desired, please contact your SPI representative.

AIP11770/AIP11771

Parts List

ITEM NO.	QTY	P/N AIP11770	P/N AIP11771
1	1	02-01	03-01
2	1	02-02	03-02
3	1	02-03	03-03
4	1	02-04	03-04
5	1	02-05	03-05
6	1	02-06	03-06
7	1*	N/A	03-07
8	1*	N/A	03-08
9	1	02-07	03-09
10	1	02-08	03-10
11	1	02-09	03-11
12	1	02-10	03-12
13	1	02-11	03-13
14	1	02-12	03-14
15	30/36	HX77740X HEX SPACER	HX85093X HEX SPACER
16	3	8-32 NUTS	8-32 NUTS
17	1	PL75628Y	PL75628Y
18	3	01-151-ST	01-151-ST
19	3	AC43117X	AC43117X
20	3	THUMB NUTS	THUMB NUTS
21	1	2F14 T5 LAMP ENGINE	2F21 T5LAMP ENGINE

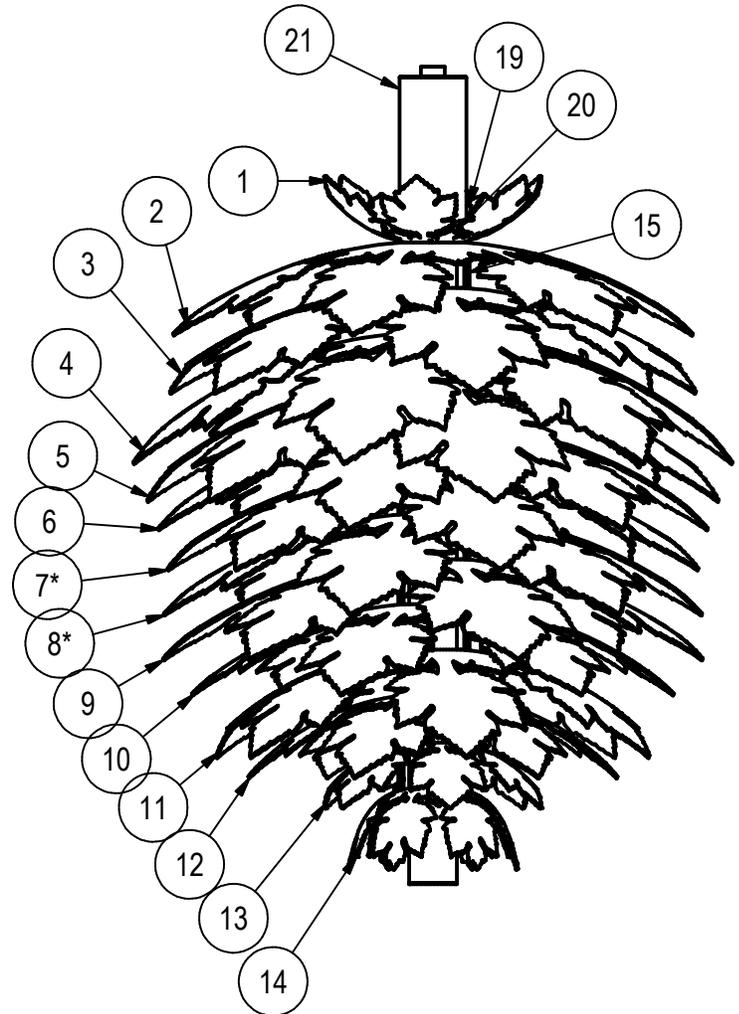

**ASSEMBLED FIXTURE
(AIP11771 PICTURED)**

****NOTES****

AIP11770 ASSEMBLED FIXTURE HAS (12) LEAF SECTIONS AND (30) HEX SPACERS. (SEE CHART ABOVE)

IMPORTANT SAFETY AND INSTALLATION INSTRUCTIONS

WARNING: Risk of fire and electrical shock. This product is to be installed by a qualified electrician only.


CAUTION: When using electrical equipment, basic safety precautions should always be followed including the following: Read all instructions carefully before installation and save

for future use. Make sure installation and all connections are in accordance with National Electrical Code and any local regulations. To avoid possible electrical shock, be sure that power supply is turned off before installing or servicing this fixture. Servicing should be performed by qualified service personnel.

These instructions do not claim to cover all details or variations. When additional information is desired, please contact your SPI representative.

AIP11770/AIP11771

ASSEMBLY INSTRUCTIONS

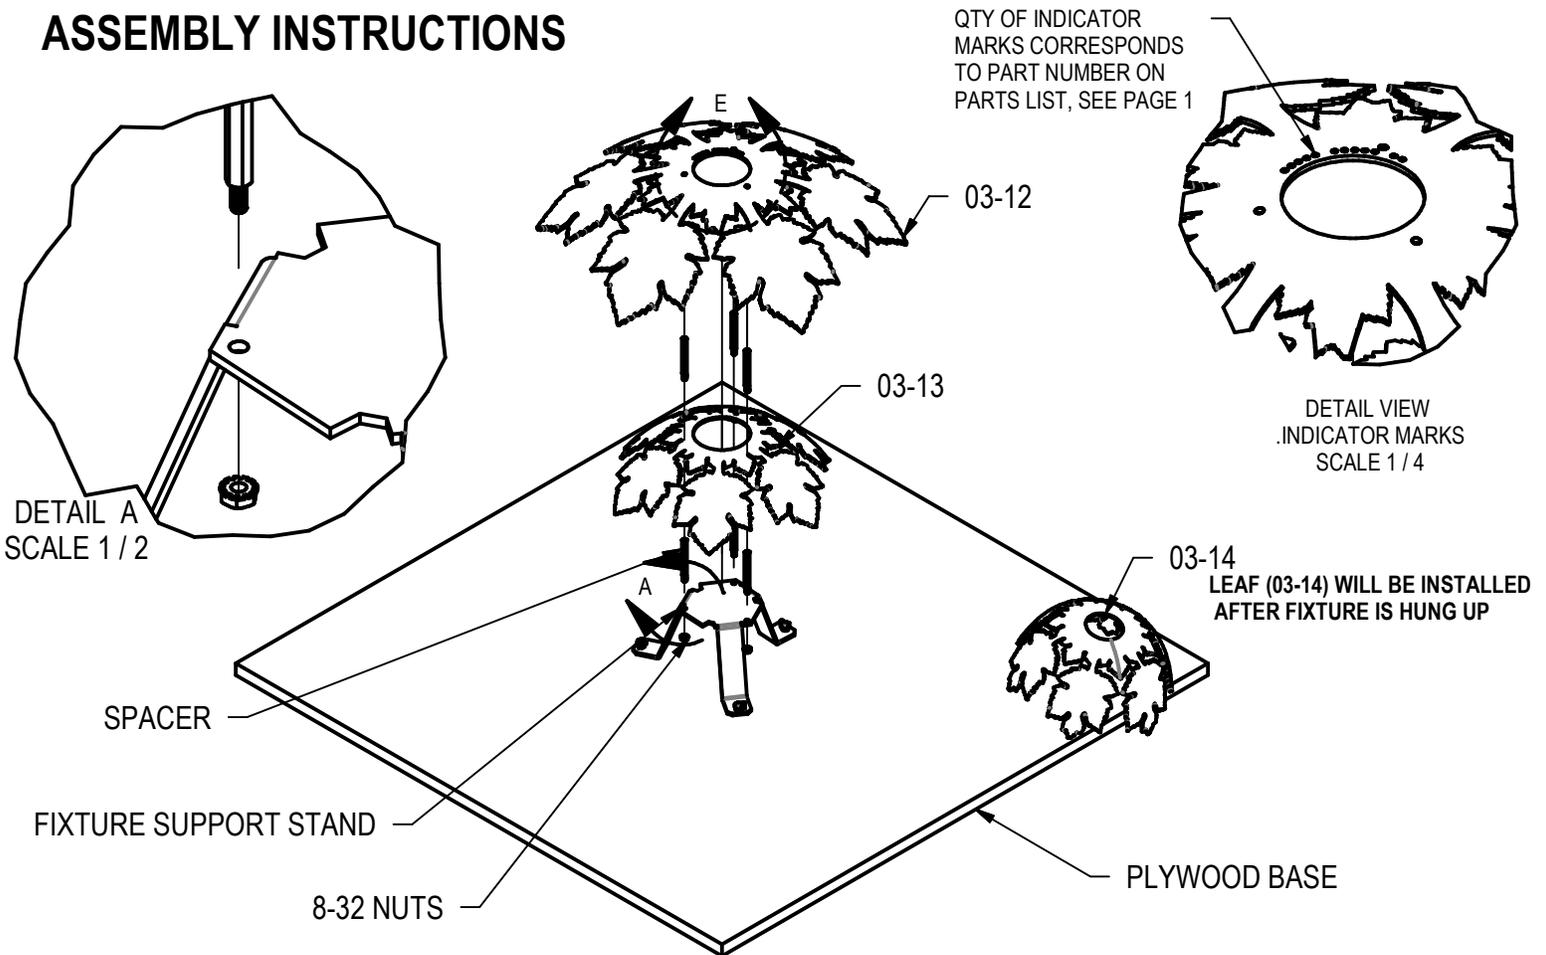

1. PLACE PLYWOOD BASE ON FLAT LEVEL SURFACE WITH FIXTURE STAND FACING UP.
2. ATTACH (3) SPACERS INTO FIXTURE SUPPORT STAND WITH THE THREADED SHAFT DOWN AND SECURE WITH 8-32 NUTS ON BOTTOM.
3. PLACE ACRYLIC LEAF (03-13) OVER THE SPACERS AND THREAD IN (3) SPACERS TO SECURE.
(***** DO NOT OVER TIGHTEN AS THAT WILL CAUSE THE LEAF TO BREAK *****)
4. PLACE ACRYLIC LEAF (03-12) OVER THE SPACERS AND THREAD IN (3) MORE SPACERS TO SECURE.

3/22/17

PAGE TWO IS93894Y

IMPORTANT SAFETY AND INSTALLATION INSTRUCTIONS

WARNING: Risk of fire and electrical shock. This product is to be installed by a qualified electrician only.

CAUTION: When using electrical equipment, basic safety precautions should always be followed including the following: Read all instructions carefully before installation and save


for future use. Make sure installation and all connections are in accordance with National Electrical Code and any local regulations. To avoid possible electrical shock, be sure that power supply is turned off before installing or servicing this fixture. Servicing should be performed by qualified service personnel.

These instructions do not claim to cover all details or variations. When additional information is desired, please contact your SPI representative.

AIP11770/AIP11771

4. CONTINUE PLACING ACRYLIC LEAVES 03-12 THRU 03-03 ON THE FIXTURE IN THE ORDER SHOWN ON DRAWING AND SECURE IN PLACE WITH THREADED SPACERS.
***** DO NOT OVERTIGHTEN SPACERS IT WILL CAUSE THE LEAVES TO BREAK *****

5. PLACE ACRYLIC LEAF 03-02 IN PLACE AND INSTALL 8-32 X 1.50" THREADED ROD IN SPACERS.

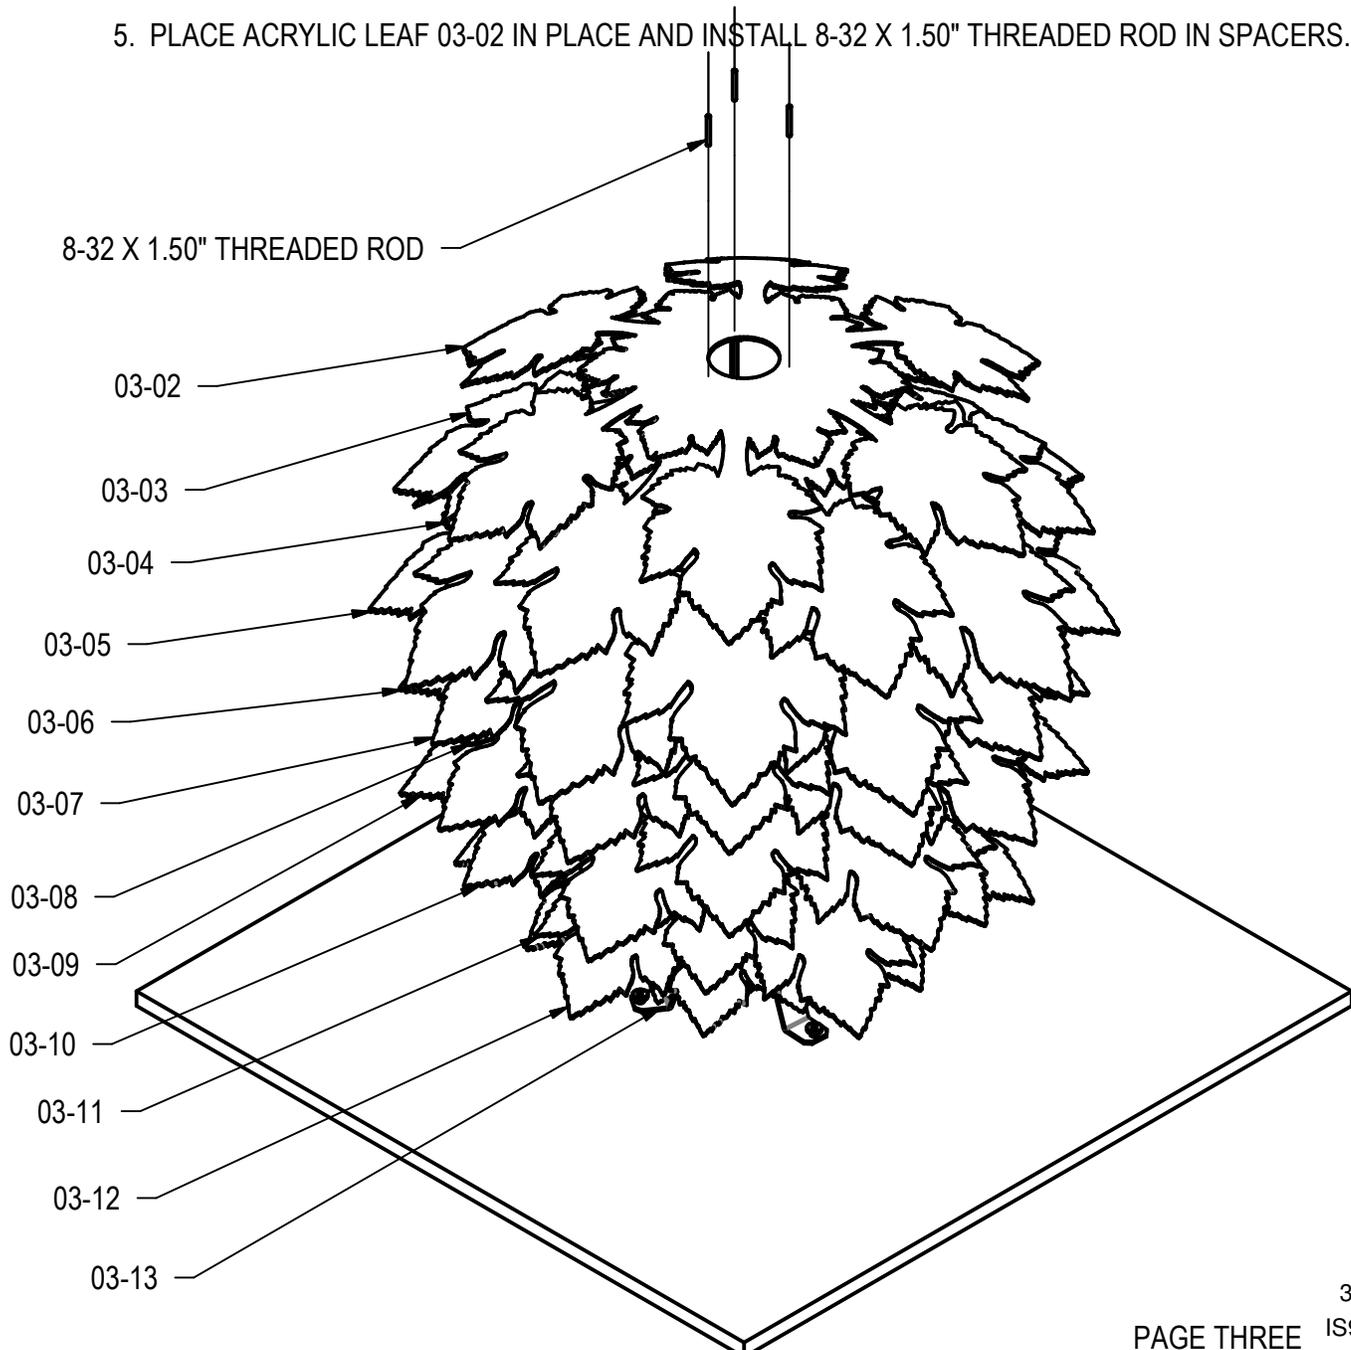

3/22/17

PAGE THREE IS93894Y

IMPORTANT SAFETY AND INSTALLATION INSTRUCTIONS

WARNING: Risk of fire and electrical shock. This product is to be installed by a qualified electrician only.

CAUTION: When using electrical equipment, basic safety precautions should always be followed including the following: Read all instructions carefully before installation and save

for future use. Make sure installation and all connections are in accordance with National Electrical Code and any local regulations. To avoid possible electrical shock, be sure that power supply is turned off before installing or servicing this fixture. Servicing should be performed by qualified service personnel.

These instructions do not claim to cover all details or variations. When additional information is desired, please contact your SPI representative.

AIP11770AIP11771

6. PLACE ACRYLIC LEAF 03-01 INVERTED (AS SHOWN) OVER THE 8-32 THREADED RODS.


7. PLACE LAMP ENGINE MOUNT PLATE OVER THE 8-32 THREADED RODS. AND SECURE WITH 8-32 NUTS

***** DO NOT OVER TIGHTEN *****

*** ACRYLIC LEAVES WILL BREAK ***

8. THREAD CABLE GRIPPER ON 8-32 THREADED ROD AND SECURE AGAINST 8-32 NUTS.

9. FIXTURE SHADE IS READY FOR INSTALLATION.

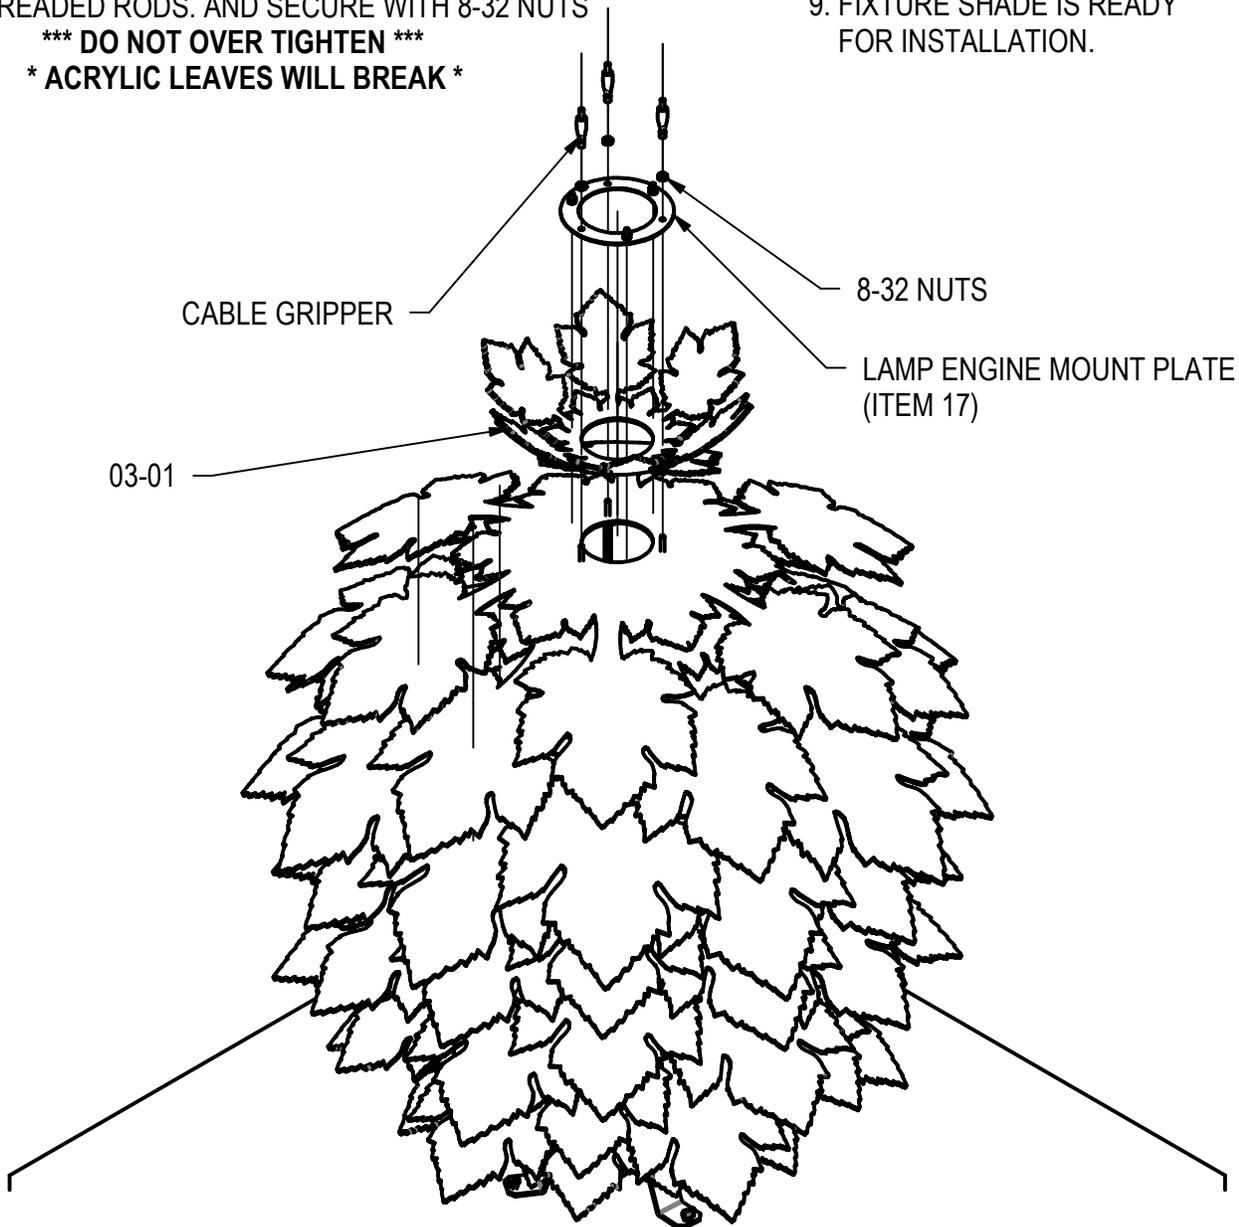

3/22/17

PAGE FOUR

IS93894Y

IMPORTANT SAFETY AND INSTALLATION INSTRUCTIONS

WARNING: Risk of fire and electrical shock. This product is to be installed by a qualified electrician only.

CAUTION: When using electrical equipment, basic safety precautions should always be followed including the following: Read all instructions carefully before installation and save


for future use. Make sure installation and all connections are in accordance with National Electrical Code and any local regulations. To avoid possible electrical shock, be sure that power supply is turned off before installing or servicing this fixture. Servicing should be performed by qualified service personnel.

These instructions do not claim to cover all details or variations. When additional information is desired, please contact your SPI representative.

AIP11770/AIP11771

INSTALLATION INSTRUCTIONS

10. INSTALL CROSS BAR TO J BOX
(HARDWARE BY OTHERS)
11. ATTACH (3) AIRCRAFT CABLES TO CROSSBAR
12. PASS CABLES THROUGH HOLES IN CANOPY COVER
13. PLACE FIXTURE SHADE DIRECTLY BENEATH CEILING MOUNTED CANOPY WITH CABLES.
14. CONNECT CABLES TO THE CABLE GRIPPERS ON TOP OF FIXTURE.
15. REMOVE THREE THUMB NUTS FROM PLYWOOD BASE AND RAISE FIXTURE AWAY FROM BASE.
16. REMOVE THREE 8-32 NUTS AND REMOVE FIXTURE SUPPORT STAND FROM BOTTOM OF FIXTURE SHADE.

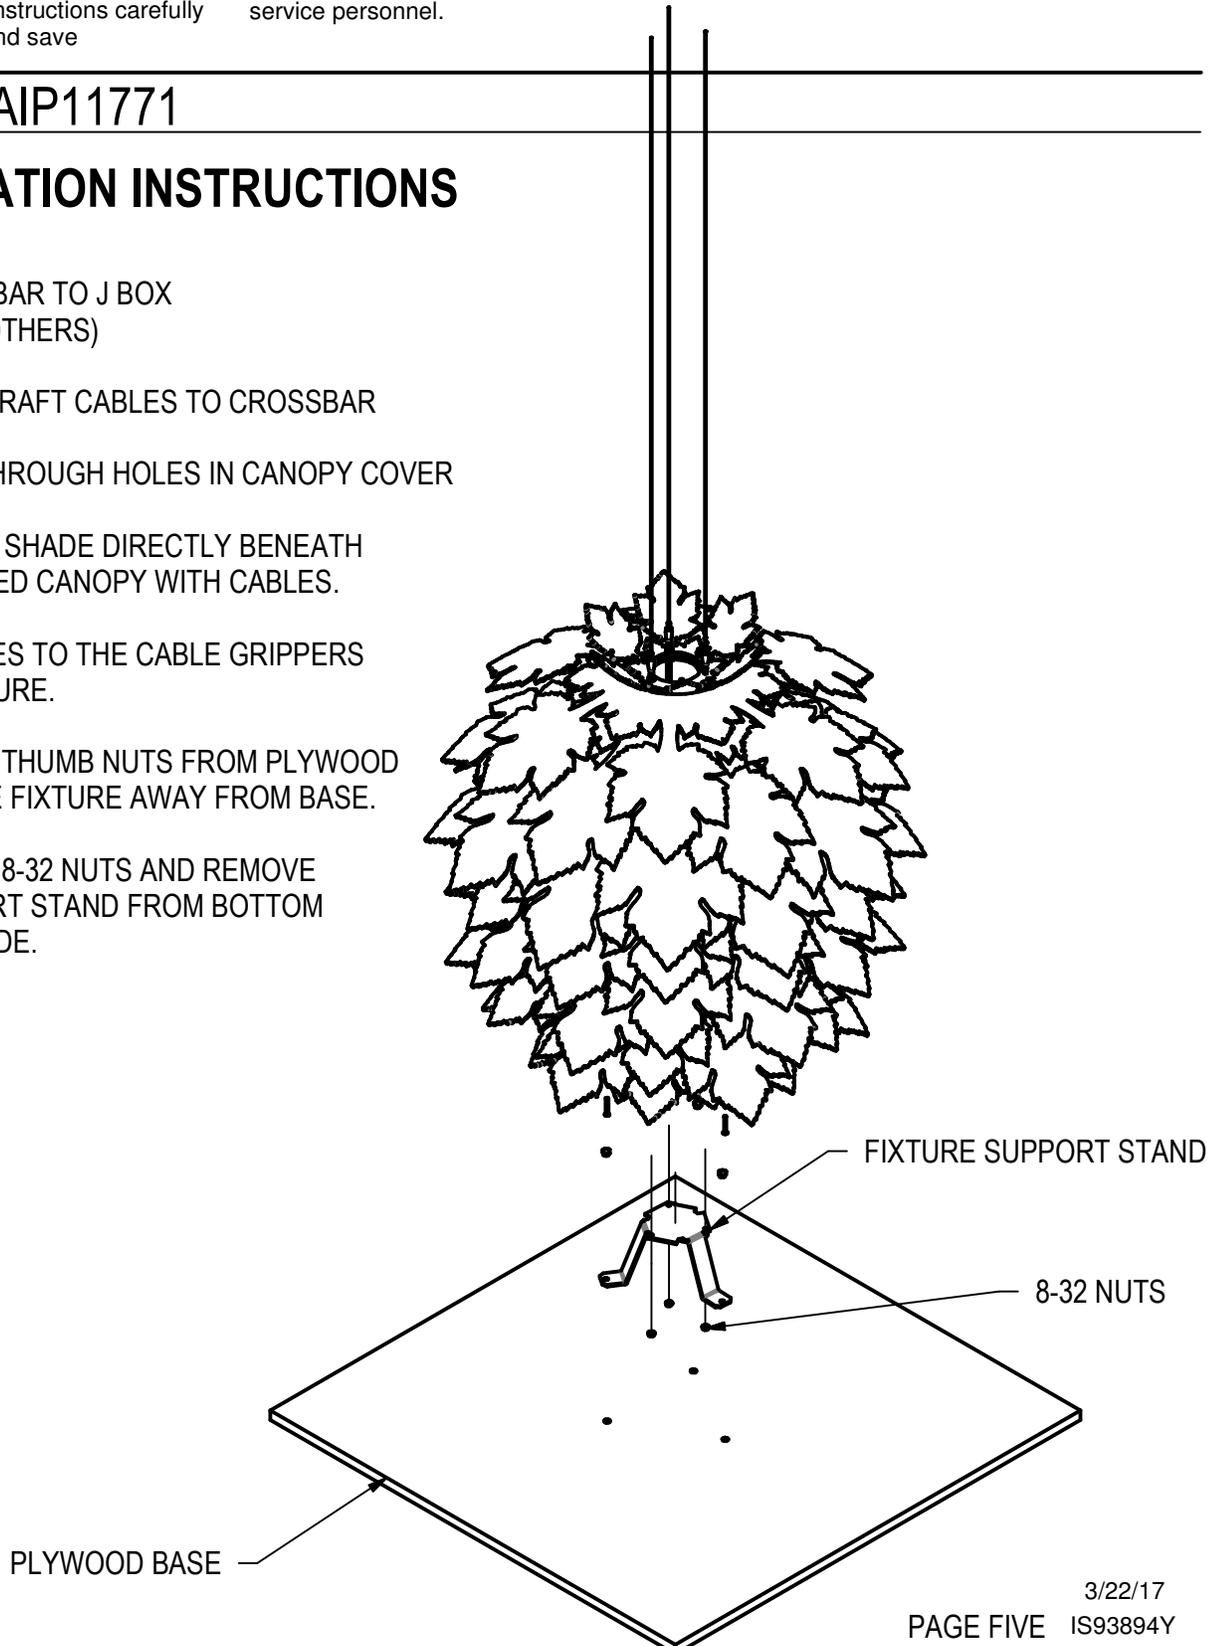

IMPORTANT SAFETY AND INSTALLATION INSTRUCTIONS

WARNING: Risk of fire and electrical shock. This product is to be installed by a qualified electrician only.


CAUTION: When using electrical equipment, basic safety precautions should always be followed including the following: Read all instructions carefully before installation and save

for future use. Make sure installation and all connections are in accordance with National Electrical Code and any local regulations. To avoid possible electrical shock, be sure that power supply is turned off before installing or servicing this fixture. Servicing should be performed by qualified service personnel.

These instructions do not claim to cover all details or variations. When additional information is desired, please contact your SPI representative.

AIP11770/AIP11771

14. PLACE ACRYLIC LEAF 01-014 ON THREADED SPACER AT BOTTOM OF FIXTURE AND SECURE WITH FINIAL BALLS.
15. REMOVE THREE THUMB NUTS FROM LAMP ENGINE MOUNTING PLATE AT TOP OF FIXTURE.
16. INSTALL LAMP ENGINE IN CENTER OF SHADE. LAMP ENGINE MOUNT BRACKET WILL REST ON LAMP ENGINE MOUNT PLATE STUDS AT TOP OF FIXTURE AND BE SECURED WITH 8-32 THUMB NUTS.
17. MAKE ELECTRICAL CONNECTIONS IN ACCORDANCE WITH NATIONAL ELECTRIC CODE AND ALL LOCAL REGULATIONS.
18. ATTACH CNOPY COVER TO CROSS BAR

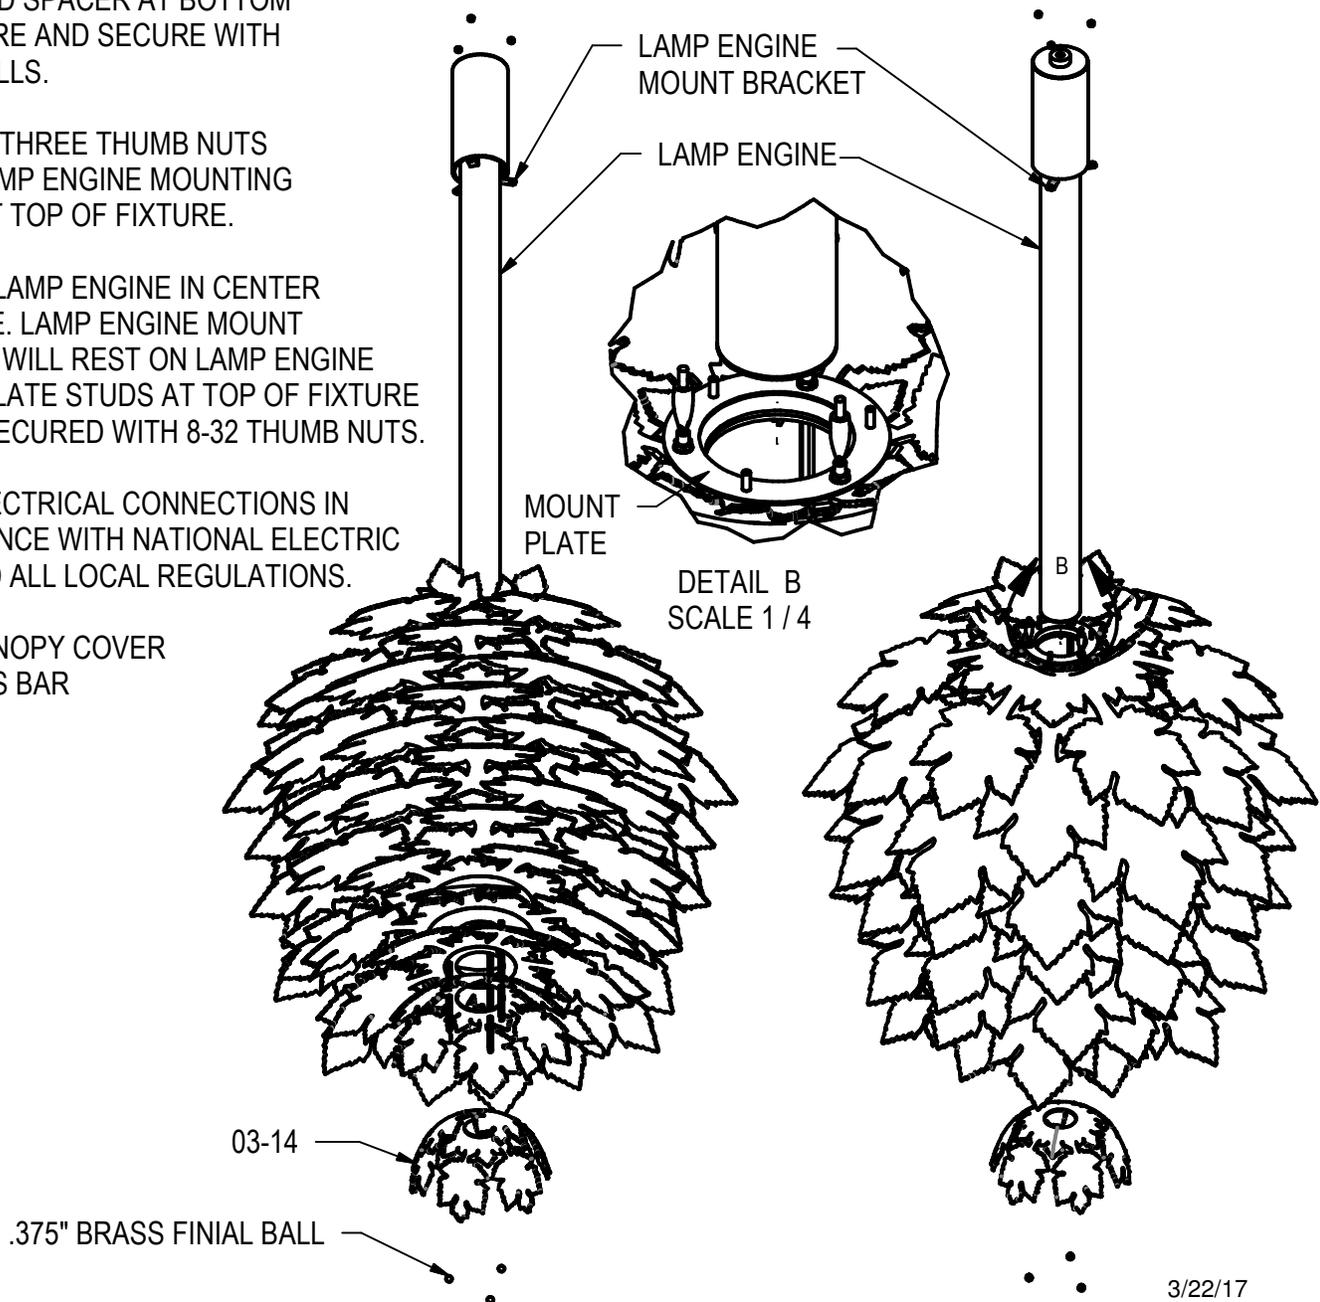

3/22/17

IS93894Y

PAGE SIX