

IMPORTANT SAFETY AND INSTALLATION INSTRUCTIONS

WARNING: Risk of fire and electrical shock. This product is to be installed by a qualified electrician only.

CAUTION: When using electrical equipment, basic safety precautions should always be followed including the following: Read all instructions carefully before installation and save


for future use. Make sure installation and all connections are in accordance with National Electrical Code and any local regulations. To avoid possible electrical shock, be sure that power supply is turned off before installing or servicing this fixture. Servicing should be performed by qualified service personnel.

These instructions do not claim to cover all details or variations. When additional information is desired, please contact your SPI representative.

BRIGHTON WALL MOUNT

INSTALLATION INSTRUCTIONS FOR 2 INC. LAMPINGS

- [A] Remove Top Plate from Fixture Housing by unscrewing the visible flat head screws.
- [B] Remove Optional Bottom Lens from Fixture Housing by unscrewing visible pan head screws.
- [C] Remove Lens Bracket from Fixture Housing by removing nuts.
- [D] Carefully Slide Lens out of Fixture Housing.
- [E] Remove Lamp Plate from Fixture Housing by removing lock nuts.
- [F] Secure Fixture Housing to junction box with screws (by others).
- [G] Place Lamp Plate with in Fixture Housing and make necessary wire connections. When wiring is complete secure Lamp Plate to the Fixture Housing with lock nuts.
- [H] Replace Lens, Lens Bracket, Optional Bottom Lens and Top Plate.

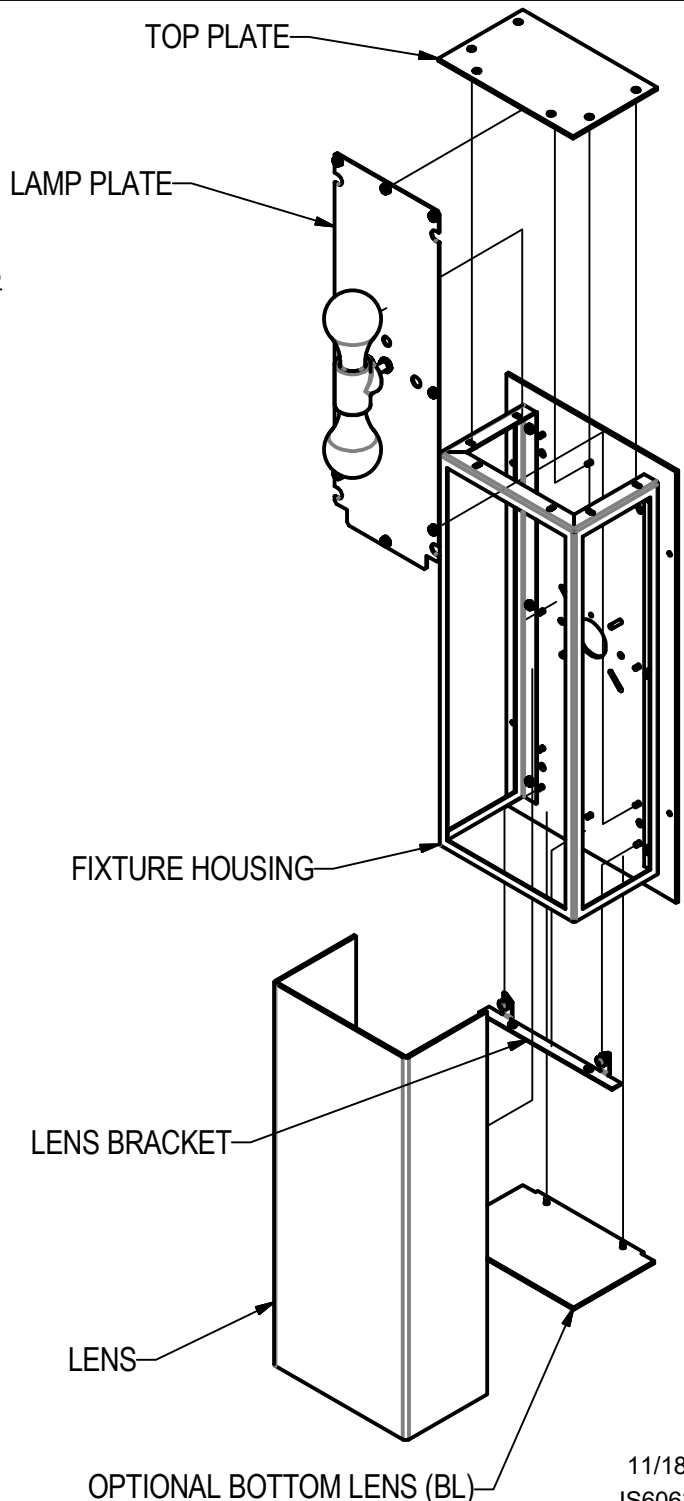

11/18/16
IS60634X