

IMPORTANT SAFETY AND INSTALLATION INSTRUCTIONS


WARNING: Risk of fire and electrical shock. This product is to be installed by a qualified electrician only.

CAUTION: When using electrical equipment, basic safety precautions should always be followed including the following: Read all instructions carefully before installation and save

for future use. Make sure installation and all connections are in accordance with National Electrical Code and any local regulations. To avoid possible electrical shock, be sure that power supply is turned off before installing or servicing this fixture. Servicing should be performed by qualified service personnel.

These instructions do not claim to cover all details or variations. When additional information is desired, please contact your SPI representative.

18" ZYNN CLUSTER MOUNT

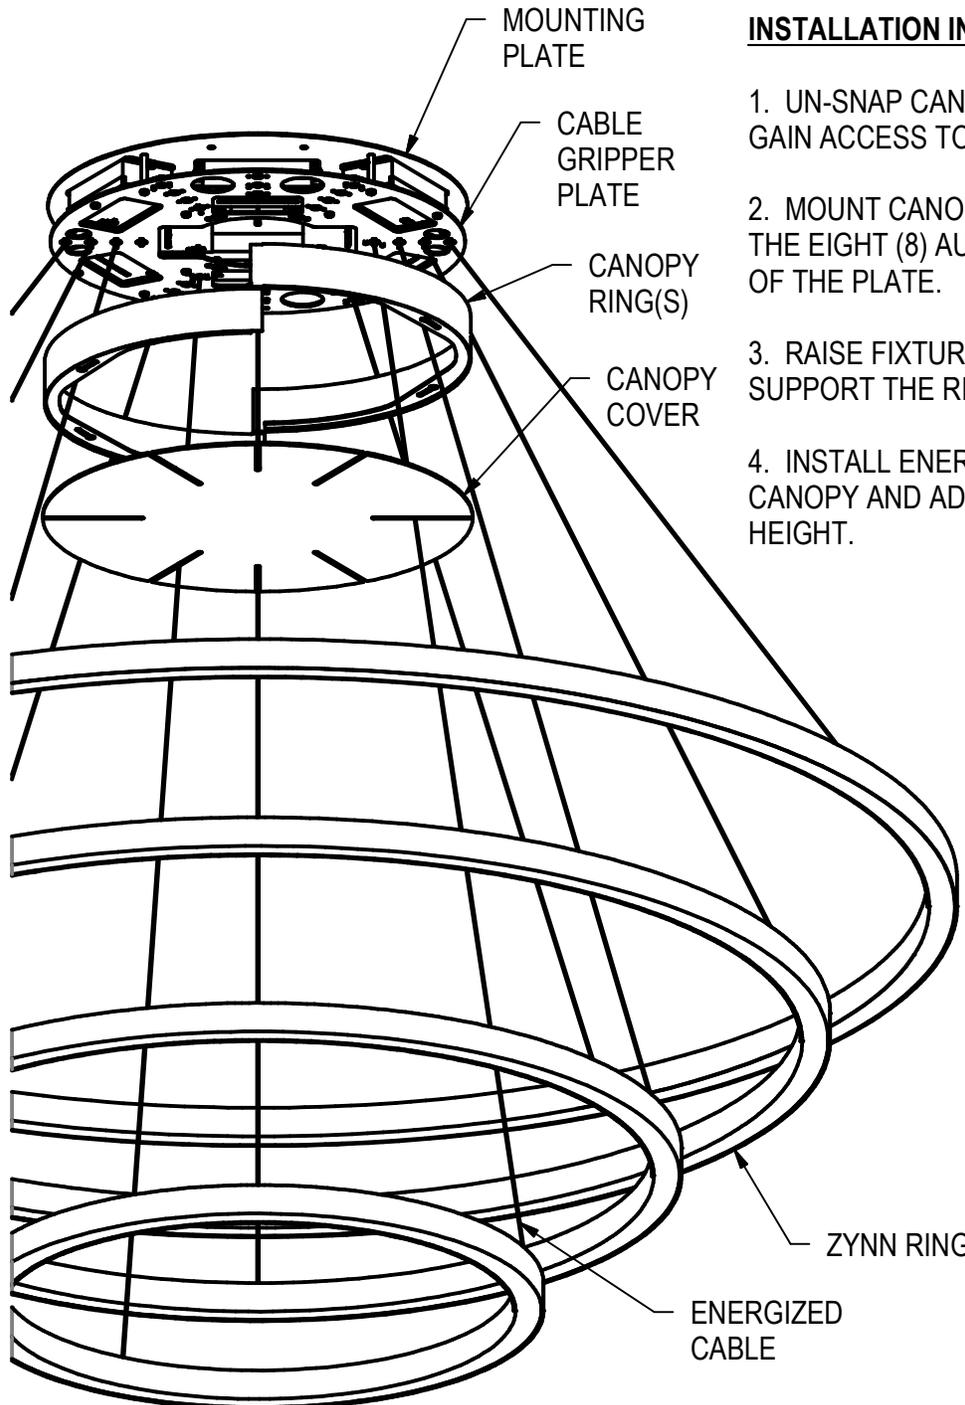

INSTALLATION INSTRUCTIONS

1. UN-SNAP CANOPY COVER AND TWIST OFF CANOPY RING TO GAIN ACCESS TO MOUNTING HOLES.
2. MOUNT CANOPY TO THE J-BOX. IF NEEDED, USE ANY OF THE EIGHT (8) AUXILIARY MOUNTING HOLES ALONG THE EDGE OF THE PLATE.
3. RAISE FIXTURE TO CANOPY, MAKING SURE TO FULLY SUPPORT THE RING.
4. INSTALL ENERGIZED CABLE INTO CABLE GRIPPERS IN CANOPY AND ADJUST TO DESIRED FIXTURE SUSPENSION HEIGHT.

4A. IF USING A POWER CORD, FEED CORD THROUGH HOLE IN CANOPY COVER. TRIM CORD TO DESIRED LENGTH AND STRIP WIRES. ATTACHED SUPPLIED STRAIN RELIEF TO CORD.

5. MAKE ALL WIRE CONNECTIONS IN ACCORDANCE WITH STATE AND LOCAL CODE.

(WIRING CONTINUED ON NEXT PAGE)

6. LEVEL FIXTURE AND SET FINAL HEIGHT.
7. REPEAT STEPS 3 - 6 FOR EACH RING.
8. REINSTALL CANOPY RING AND CANOPY COVER TO GRIPPER PLATE.

5' RING = A; 4' RING = B
3' RING = C; 2' RING = D

**CONFIGURATION
MAY VARY**

01/10/20
IS105845X

IMPORTANT SAFETY AND INSTALLATION INSTRUCTIONS

WARNING: Risk of fire and electrical shock. This product is to be installed by a qualified electrician only.


CAUTION: When using electrical equipment, basic safety precautions should always be followed including the following: Read all instructions carefully before installation and save

for future use. Make sure installation and all connections are in accordance with National Electrical Code and any local regulations. To avoid possible electrical shock, be sure that power supply is turned off before installing or servicing this fixture. Servicing should be performed by qualified service personnel.

These instructions do not claim to cover all details or variations. When additional information is desired, please contact your SPI representative.

18" ZYNN CLUSTER WIRING -- MCE

****CONFIGURATION OF RINGS, HOLES, AND POWER DRIVERS MAY VARY****

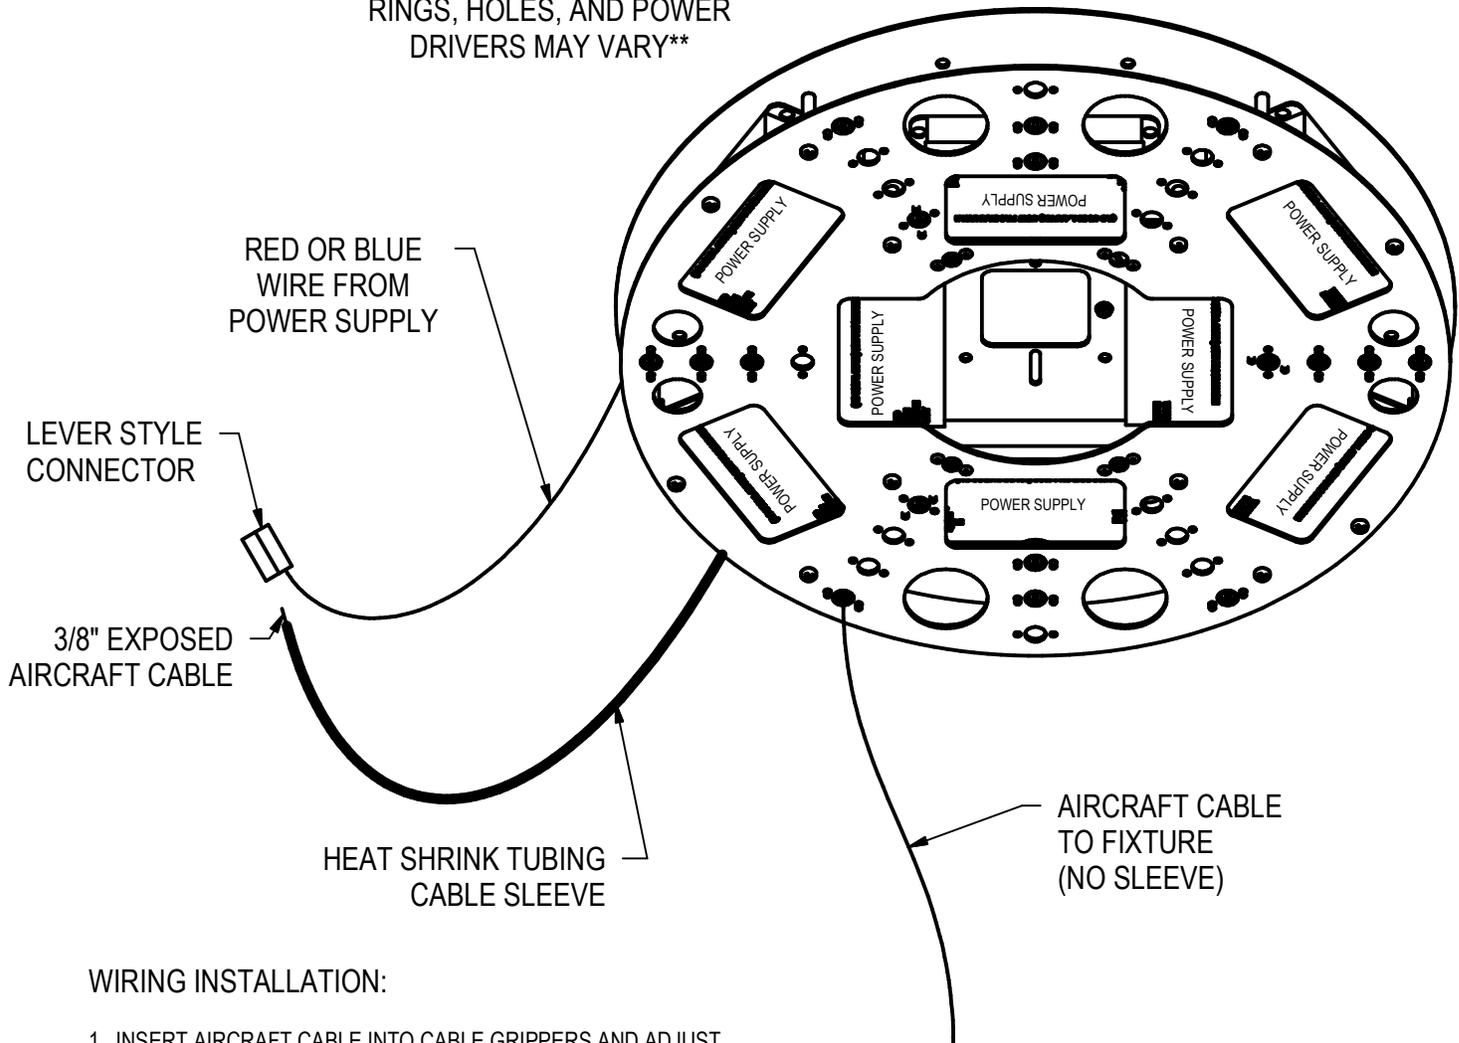

WIRING INSTALLATION:

1. INSERT AIRCRAFT CABLE INTO CABLE GRIPPERS AND ADJUST TO DESIRED FIXTURE SUSPENSION HEIGHT. LEVEL FIXTURE.
2. CUT SUPPLIED WIRE SLEEVING TO EQUAL LENGTHS FOR EACH CABLE. SLIDE SLEEVE OVER THE EXPOSED CABLE WITHIN THE CANOPY. TRIM CABLE TO APPROXIMATELY 3/8" EXPOSED FROM END OF SLEEVING.
3. USING THE SUPPLIED LEVER CONNECTOR, CONNECT END OF EACH AIRCRAFT CABLE TO EITHER THE RED (POS +) OR BLUE (NEG -) WIRES OF THE POWER SUPPLIES. THE POLARITY OF THE CABLE, (POS +) OR (NEG -), MUST MATCH THE POLARITY OF THE POWER SUPPLY WIRES. AIRCRAFT CABLES LABELED WITH THE SAME SUPPLY NUMBER MUST BE ATTACHED TO THE SAME POWER SUPPLY.
4. CONNECT THE HIGH VOLTAGE SUPPLY LEADS TO THE BRANCH CIRCUIT AND PUSH CONNECTIONS INTO J-BOX. WIRE OR CAP-OFF DIMMING LEADS IF APPLICABLE.
5. REPEAT STEPS 1 - 4 FOR EACH CABLE.

01/10/20
IS105845X

IMPORTANT SAFETY AND INSTALLATION INSTRUCTIONS

WARNING: Risk of fire and electrical shock. This product is to be installed by a qualified electrician only.


CAUTION: When using electrical equipment, basic safety precautions should always be followed including the following: Read all instructions carefully before installation and save

for future use. Make sure installation and all connections are in accordance with National Electrical Code and any local regulations. To avoid possible electrical shock, be sure that power supply is turned off before installing or servicing this fixture. Servicing should be performed by qualified service personnel.

These instructions do not claim to cover all details or variations. When additional information is desired, please contact your SPI representative.

18" ZYNN CLUSTER WIRING -- MCP

****CONFIGURATION OF RINGS, HOLES, AND POWER DRIVERS MAY VARY****

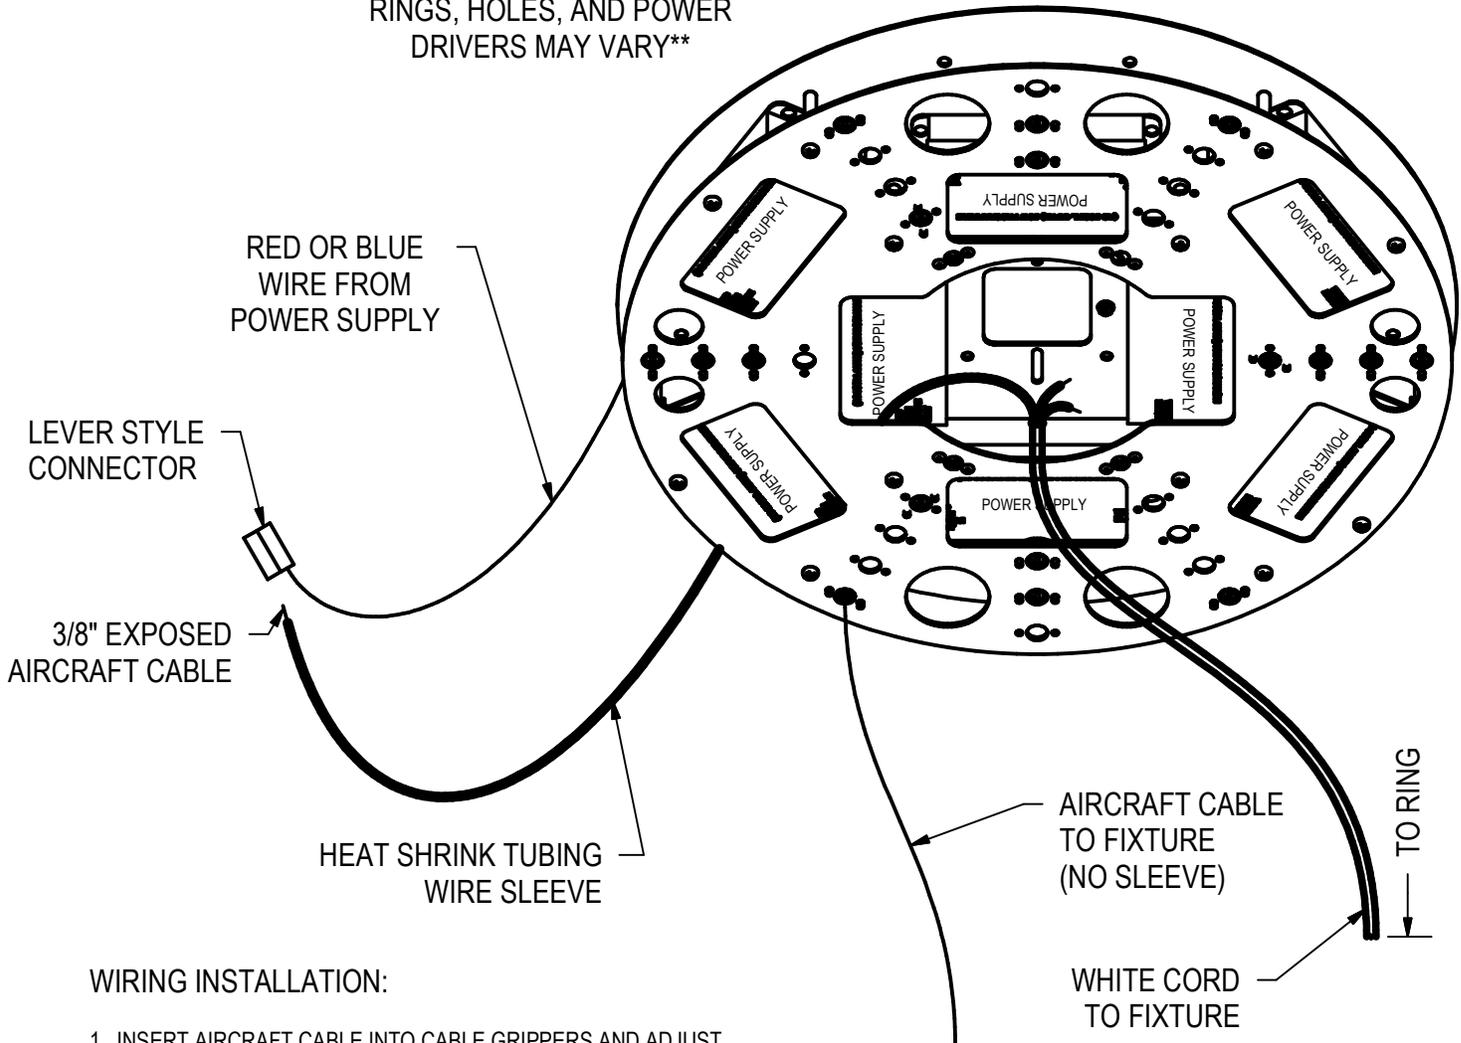

WIRING INSTALLATION:

1. INSERT AIRCRAFT CABLE INTO CABLE GRIPPERS AND ADJUST TO DESIRED FIXTURE SUSPENSION HEIGHT. LEVEL FIXTURE. REPEAT FOR EACH CABLE.
2. INSERT WHITE CORD INTO CANOPY AND ADJUST WIRES.
3. USING THE SUPPLIED LEVER CONNECTOR, CONNECT END OF EACH LABELED WIRE TO EITHER THE RED (POS +) OR BLUE (NEG -) WIRES OF THE POWER SUPPLIES. THE POLARITY OF THE WIRE, (POS +) OR (NEG -), MUST MATCH THE POLARITY OF THE POWER SUPPLY WIRES. WIRES LABELED WITH THE SAME SUPPLY NUMBER MUST BE ATTACHED TO THE SAME POWER SUPPLY.
4. CONNECT THE HIGH VOLTAGE SUPPLY LEADS TO THE BRANCH CIRCUIT AND PUSH CONNECTIONS INTO J-BOX. WIRE OR CAP-OFF DIMMING LEADS IF APPLICABLE.
5. REPEAT STEPS 2 - 4 FOR EACH CORD.

01/10/20
IS105845X

IMPORTANT SAFETY AND INSTALLATION INSTRUCTIONS

WARNING: Risk of fire and electrical shock. This product is to be installed by a qualified electrician only.

CAUTION: When using electrical equipment, basic safety precautions should always be followed including the following: Read all instructions carefully before installation and save

for future use. Make sure installation and all connections are in accordance with National Electrical Code and any local regulations. To avoid possible electrical shock, be sure that power supply is turned off before installing or servicing this fixture. Servicing should be performed by qualified service personnel.

These instructions do not claim to cover all details or variations. When additional information is desired, please contact your SPI representative.

18" ZYNN CLUSTER MOUNT


RING INSTALLATION:

EACH LUMINAIRE WILL HAVE A LABEL INDICATING WHICH MOUNTING RING IT IS TO BE MOUNTED. USE THE CABLE GRIPPER LOCATIONS IN THAT RING TO MOUNT FIXTURE.


- IF 2 LUMINAIRE UNITS SHARE THE SAME MOUNTING RING, ALTERNATE CABLE GRIPPERS IN THE MOUNTING PLATE FOR EACH LUMINAIRE.

MOUNT THE LUMINAIRE IN THE ORDER OF INNER TO OUTER TO REDUCE CLUTTER WHEN DEALING WITH THE OTHER RINGS.

****EXAMPLE CONFIGURATION****

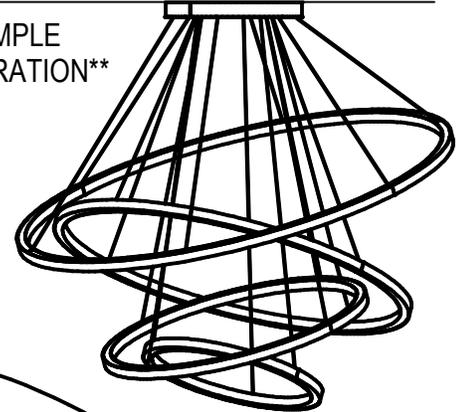

MOUNTING LABEL

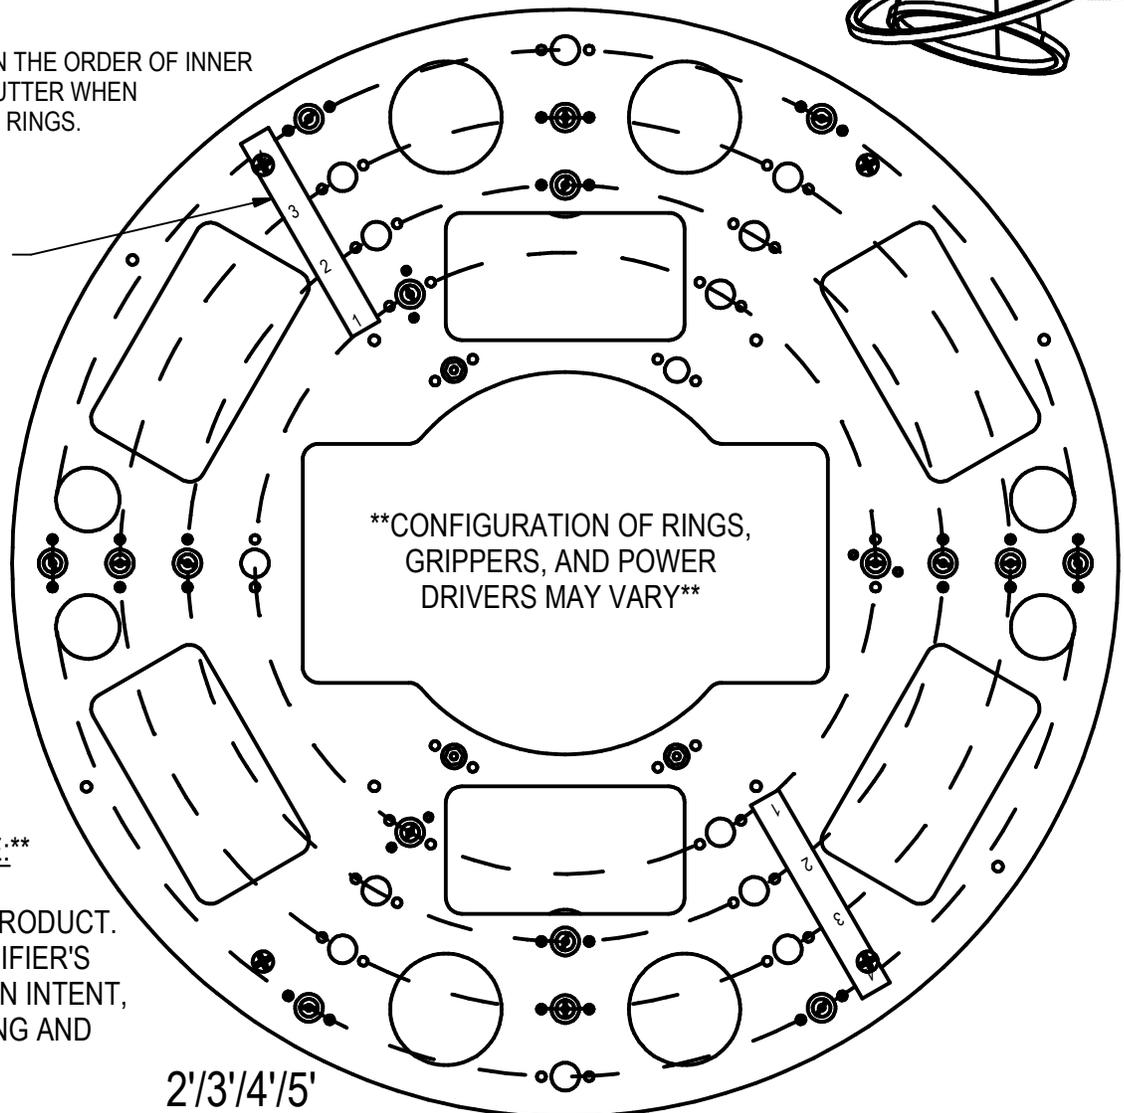

****IMPORTANT NOTE:****

THIS IS AN ADJUSTABLE PRODUCT. PLEASE CONSULT SPECIFIER'S INSTRUCTIONS FOR DESIGN INTENT, INCLUDING RING SPACING AND ORIENTATION.

2'3'4'5'
CONFIGURATION SHOWN

01/10/20
IS105845X