

IMPORTANT SAFETY AND INSTALLATION INSTRUCTIONS


WARNING: Risk of fire and electrical shock. This product is to be installed by a qualified electrician only.

CAUTION: When using electrical equipment, basic safety precautions should always be followed including the following: Read all instructions carefully before installation and save

for future use. Make sure installation and all connections are in accordance with National Electrical Code and any local regulations. To avoid possible electrical shock, be sure that power supply is turned off before installing or servicing this fixture. Servicing should be performed by qualified service personnel.

These instructions do not claim to cover all details or variations. When additional information is desired, please contact your SPI representative.

ASHLAND LED PENDANT INSTALLATION

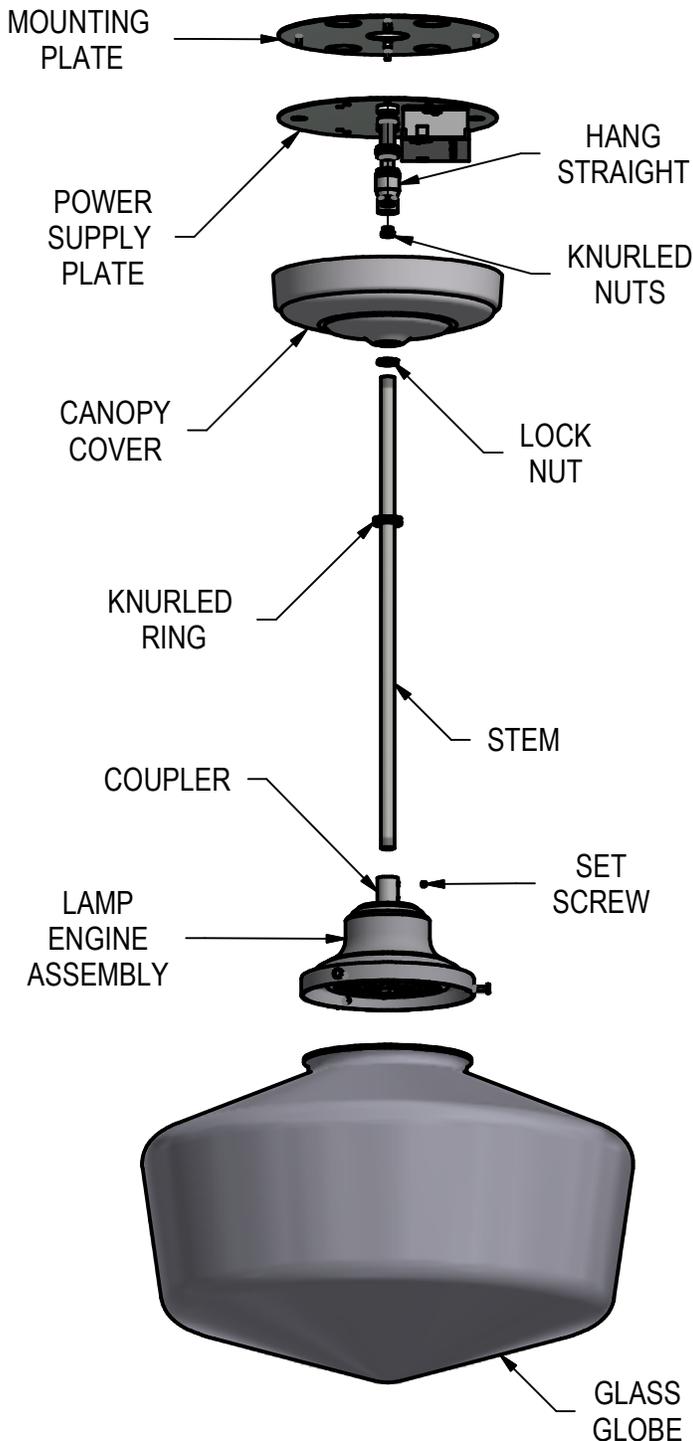

INSTALLATION STEPS:

1. UNPACK FIXTURE.
2. REMOVE KNURLED RING FROM CANOPY ASSEMBLY AND REMOVE CANOPY COVER.
3. REMOVE THE (2) 8-32 KNURLED NUTS RETAINING THE POWER SUPPLY PLATE AND REMOVE POWER SUPPLY PLATE.
4. INSTALL MOUNTING PLATE TO JUNCTION BOX. (HARDWARE BY OTHERS)
5. MAKE LINE VOLTAGE AND DIMMING CONNECTIONS TO DRIVER AND REINSTALL POWER SUPPLY PLATE.
6. PASS WIRES THROUGH STEM AND INSTALL STEM TO STEM COUPLER. RETAIN WITH SUPPLIED 8-32 SET SCREW.
7. SLIDE KNURLED RING AND CANOPY COVER DOWN STEM.
8. PASS WIRES FROM STEM THROUGH HANG STRAIGHT AND INSTALL STEM TO HANGSTRAIGHT. SECURE WITH LOCK NUT.
9. MAKE LOW VOLTAGE WIRING CONNECTIONS TO POWER SUPPLY.
10. INSTALL CANOPY COVER TO CANOPY AND RETAIN WITH KNURLED RING.
11. INSTALL GLASS GLOBE TO LAMP ENGINE ASSEMBLY VIA THUMB SCREWS.

4/22/20
IS107354X