

IMPORTANT SAFETY AND INSTALLATION INSTRUCTIONS

WARNING: Risk of fire and electrical shock. This product is to be installed by a qualified electrician only.

CAUTION: When using electrical equipment, basic safety precautions should always be followed including the following: Read all instructions carefully before installation and save



for future use. Make sure installation and all connections are in accordance with National Electrical Code and any local regulations. To avoid possible electrical shock, be sure that power supply is turned off before installing or servicing this fixture. Servicing should be performed by qualified service personnel.

These instructions do not claim to cover all details or variations. When additional information is desired, please contact your SPI representative.

SURFACE MOUNT W/ STANDARD J-BOX COVER, - (SJB)

INSTALLATION:

1. MAKE ALL ELECTRICAL CONNECTIONS FROM THE REMOTE POWER SUPPLY TO THE J-BOX PER CODE.
2. FASTEN BRACKET TO J-BOX (USING FASTENERS BY OTHERS).
3. SECURE J-BOX COVER TO BRACKET USING SUPPLIED SET SCREW
4. REMOVE TAPE BACKING LOCATED ON STEM MOUNT(S).
5. PASS WIRES THROUGHT THE HOLES LOCATED IN THE J-BOX COVER.
6. USING FIXTURE TO LOCATE THE STEM MOUNT(S), CONNECT THE BALL ON THE J-BOX COVER WITH THE FIXTURE AND PRESS FIRMLY TO ADHEAR THE STEM MOUNT(S) TO MOUNTING SURFACE.
7. LOOSEN STEM MOUNT SET SCREW(S).
8. REMOVE FIXTURE FROM MOUNTING SURFACE AND SECURE STEM MOUNT(S) TO MOUNTING SURFACE (USING FASTENERS SUPPLIED BY OTHERS).
9. LOOSEN SET SCREW IN J-BOX COVER AND REMOVE J-BOX COVER.
10. PASS WIRE THROUGH THE J-BOX COVER AND MAKE ALL ELECTRICAL CONNECTIONS TO FIXTURE PER CODE.
11. SECURE THE J-BOX COVER TO BRACKET.
12. CONNECT BALL TO FIXTURE AND SECURE FIXTURE TO STEM MOUNT(S) USING SUPPLIED SET SCREW(S).

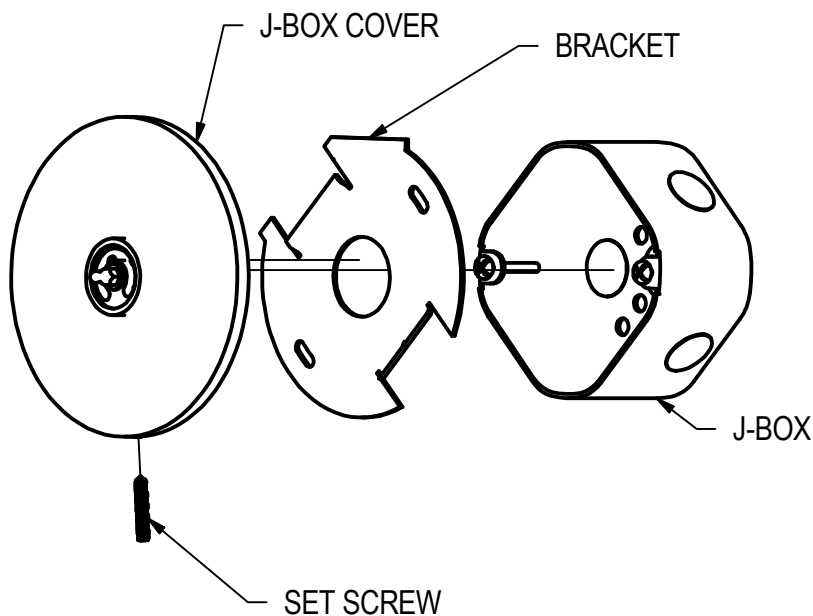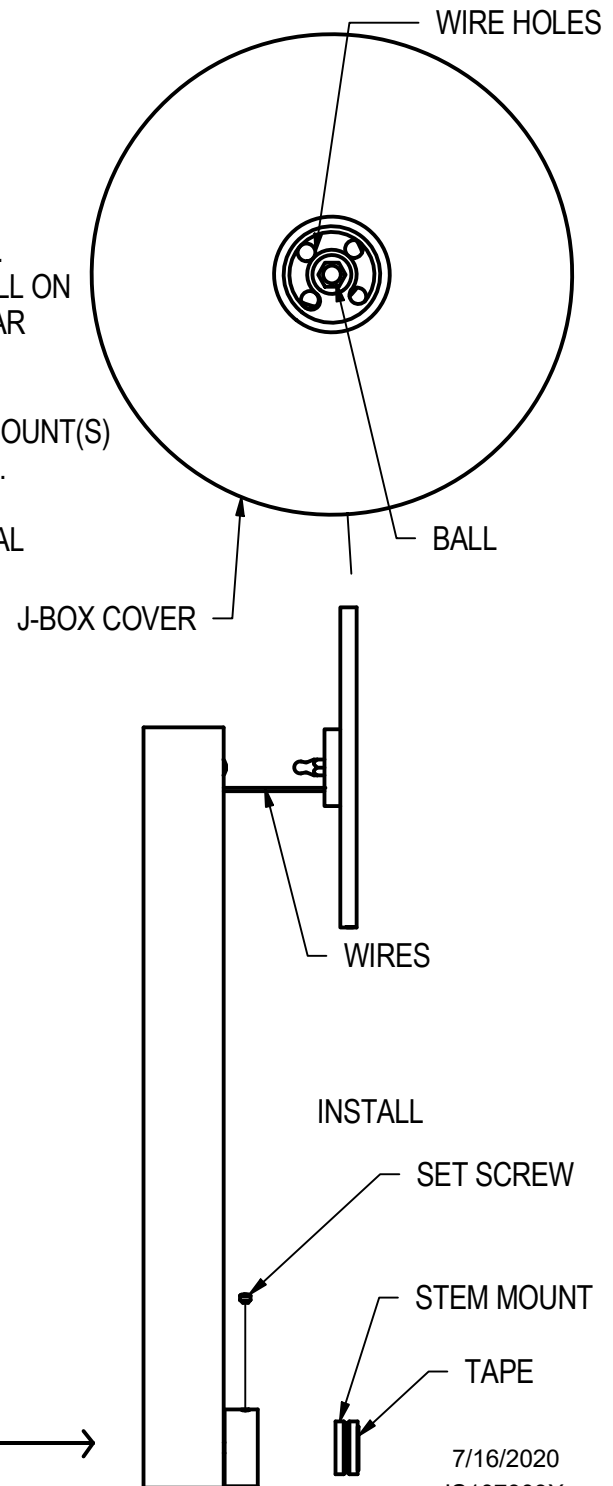

7/16/2020
IS107909X