

IMPORTANT SAFETY AND INSTALLATION INSTRUCTIONS

WARNING: Risk of fire and electrical shock. This product is to be installed by a qualified electrician only.

CAUTION: When using electrical equipment, basic safety precautions should always be followed including the following: Read all instructions carefully before installation and save

for future use. Make sure installation and all connections are in accordance with National Electrical Code and any local regulations. To avoid possible electrical shock, be sure that power supply is turned off before installing or servicing this fixture. Servicing should be performed by qualified service personnel.



These instructions do not claim to cover all details or variations. When additional information is desired, please contact your SPI representative.

RECESSED WALL MOUNT EXTERIOR - (REC)

NOTE: BLOCKING IS REQUIRED TO SUPPORT FIXTURE

INSTALLATION:

1. TURN POWER OFF.
2. REMOVE FACE PLATE W/ LIGHT TUBE, SET ASIDE.
3. CONFIRM WHICH CUT OUT SIZE TO USE (SEE BOTTOM OF PAGE), CUT HOLE IN WALL.
4. MAKE ALL ELECTRICAL CONNECTIONS TO FIXTURE BOX PER CODE.
5. SLIDE FIXTURE WALL RECESSED BOX INTO CUT OUT. BOX CAN BE SECURED WITH BLOCKING AND SCREWS (SCREWS / BLOCKING BY OTHERS).
NOTE: FIXTURE FRAME SHOULD COVER CUT-OUT COMPLETELY.
6. WIRE FACE PLATE W/ LIGHT TUBE TO POWER SUPPLY.
7. SECURE FACE PLATE TO FIXTURE BOX BY INSTALLING SCREWS.
DO NOT OVER TIGHTEN
8. APPLY A CONTINUOUS "GENEROUS" BEAD OF SILICONE AT FIXTURE FRAME FACE PLATE PERIMETER. NOTE: IF EXTERIOR WALL IS NOT COMPLETELY FLAT, THE GAPS WILL NEED TO BE FILLED IN WITH SILICONE AS NEEDED. LET SILICONE DRY.

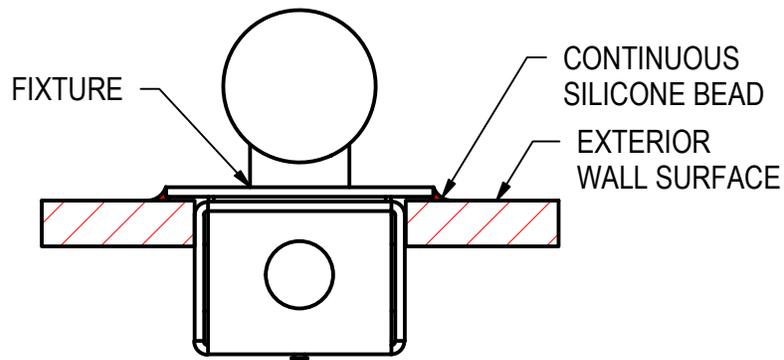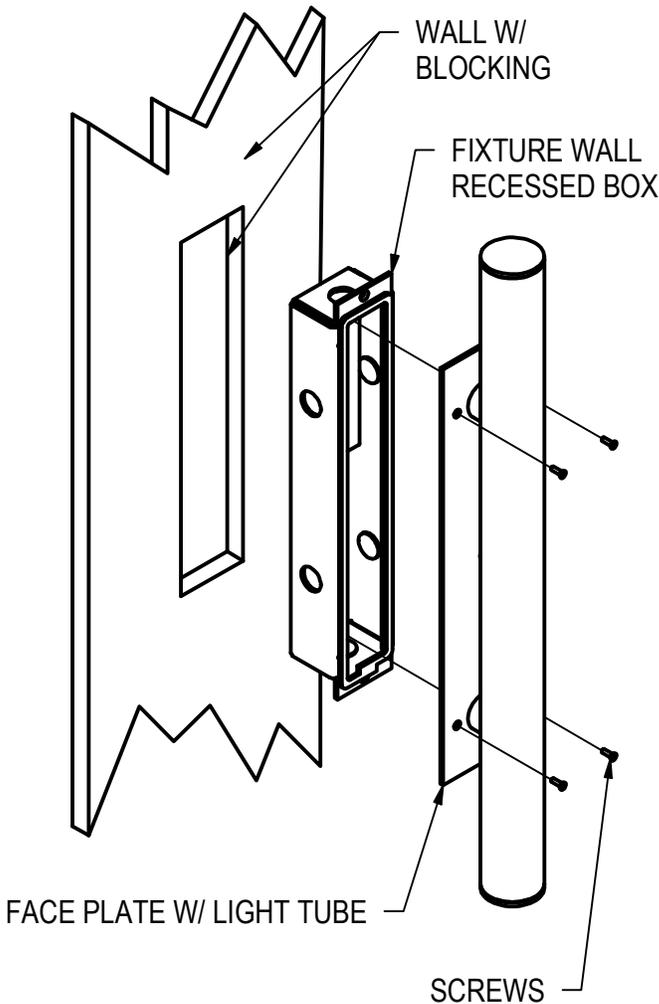

9. TURN POWER ON & TEST.

RECTANGULAR CUT-OUT DIMENSIONS

- 1 FOOT NOMINAL FIXTURES: 8" X 2.75"
- 2 FOOT NOMINAL FIXTURES: 14" X 2.75"
- 3 FOOT NOMINAL FIXTURES: 20" X 2.75"
- 4 FOOT NOMINAL FIXTURES: 27" X 2.75"
- 5 FOOT NOMINAL FIXTURES: 31" X 2.75"

12/7/22
IS114248X