

Novato Frame - Ceiling

SPILIGHTING

PROJECT DETAILS

AIC11894 24.00 in

JOB NAME:

TYPE:

NOTES:

DESCRIPTION

While highly functional, the Novato family provides a playful twist to make a lasting impression. Versatility is the main strength of this collection as they are perfectly suited for a wide range of modern or traditional environments. Choose from 2', 3', or 4' square luminaires. Also available in pendant mount.

FEATURES & BENEFITS

- Diffuser available in two heights (see line art for details)
- Handcrafted in USA, BABA Compliant


SPECIFICATIONS

- **LIGHT SOURCE:** White LED light engine (contact factory for RGBW or Tunable White)
- **CRI:** 90+HE
- **LUMEN MAINTENANCE:** L70 = >50,000 Hrs.
- **EFFICACY:** 104 lm/W delivered
- **CCT:** 2700K, 3000K, 3500K, 4000K, 5000K
- **VOLTAGE:** 120-277V standard
- **DRIVER:** Integral Class 2 power supply standard
- **DIMMING:** 0-10V controls standard to 1% on LED light engines
- **CONTROLS:** Contact factory for control options (e.g., Lutron Athena, Current NX, nLight, Enlighted, Encelium, Wattstopper, WaveLinx, or Casambi)
- **EMERGENCY:** Remote battery option is provided with 10W Constant Power Battery back-up, providing 90 Minutes of Emergency operation. Contact factory for other Emergency options.
- **DIFFUSER:** Matte opal acrylic
- **FINISH:** Tailor the mounting plate to your space. Choose from 26 standard thermoset polyester powder coat paint colors. RAL®, Pantone®, or custom finishes available upon request.
- **MOUNTING:** Mounts to a standard 4" octagonal junction box
- **MODIFICATIONS:** Consult factory for all modification requests, including RGBW, Tunable White, or rectangles
- **APPROVALS:** ETL listed to UL standards (US & Canada) for use



in damp locations; not recommended for exterior applications

DIMENSIONS

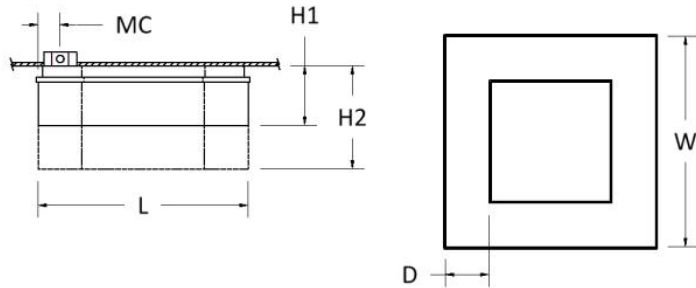

| W | H1 | H2 | D | MC | L |
|-------|---------|---------|---------|--------|-------|
| 24 in | 6.8 in | 11.8 in | 5 in | 2.5 in | 24 in |
| 61 cm | 17.3 cm | 30 cm | 12.7 cm | 6.4 cm | 61 cm |

Mounting Weight
Approximate: 25 lb (12 kg)

CONFIGURATOR

To configure your spec sheet online, go to www.spilighting.com/AIC11894. Not all options are available in all configurations; consult factory for details.

Required Field *

| | | | | | | | | |
|---------------------|---------------|-----------------|----------|---------------|------|------------------|------------------|-----------|
| Catalog AIC11894 | Light Source* | Primary Finish* | Voltage* | Lamp Options* | CRI* | Diffuser Height* | Diffuser Finish* | Emergency |
| | A | | B | C | D | E | F | G |

A - LIGHT SOURCE *

To ensure color consistency, SPI uses precise bin selection and strict quality processes to maintain a 3-step (MacAdam) SDCM on all white LED lampings. Published LED luminaire wattages are calculated using a typical power supply efficiency of 88%; exact wattages may vary based on application. Alternative wattages available upon request.

- ☐ **L42W** | White 42W LED Light Engine | Delivered Lumens: 4,372
- ☐ **L85W** | White 85W LED Light Engine | Delivered Lumens: 8,849
- ☐ **Cust_Out** |

Lumen Calculator: Enter Lumens or Watts if different than displayed

| | | |
|--|----|---------------------|
| | LU | Min 4372 - Max 8848 |
| | W | Min 42.0 - Max 85.0 |

[See last page for finish options](#)

*For requests outside Min-Max range, please contact factory.

B - VOLTAGE *

- ☐ 120-277V | Universal Voltage

C - LAMP OPTIONS *

- ☐ 2700K | 2700K CCT
- ☐ 3000K | 3000K CCT
- ☐ 3500K | 3500K CCT
- ☐ 4000K | 4000K CCT
- ☐ 5000K | 5000K CCT


D - CRI *

- ☐ DF_90+HE | 90+ High Efficacy

E - DIFFUSER HEIGHT *

Please choose one:

- ☐ H05 | 5" Height
- ☐ H10 | 10" Height

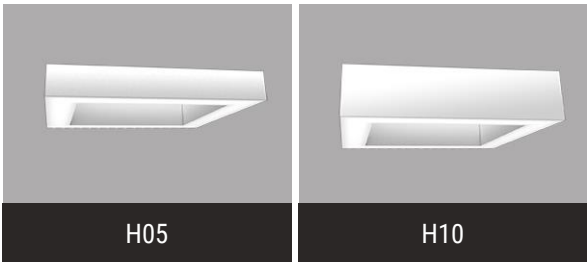

F - DIFFUSER FINISH *

- ☐ FB00 | Matte Opal Diffuser



G - EMERGENCY

10W, Constant Power Battery Back-up, with 90 minutes of emergency operation. EMR includes damp location enclosure for Battery back-up.

- ☐ EMR | Emergency Battery Remote

Standard Finishes

The colors shown are representative. Their actual appearance may vary due to differences in display settings. You can request color chips by emailing contact@spilighting.com. Please note, finishes may not be available in all configurations.

Paint Colors

| | | | | |
|---|--|---|---|---|
| PT01 RAL9003 Signal White (Gloss) | PT51 Matte White (Textured) | PT02 White (Textured) | PT04 RAL9001 Cream (Textured) | PT67 RAL7044 Silk Grey (Textured) |
| PT53 RAL7035 Light Grey (Textured) | PT54 RAL7037 Dusty Grey (Textured) | PT55 RAL7012 Basalt Grey (Textured) | PT56 RAL7016 Anthracite Grey (Textured) | PT11 Black (Textured) |
| PT57 RAL1015 Light Ivory (Textured) | PT58 RAL8004 Copper Brown (Textured) | PT59 RAL6021 Pale Green (Textured) | PT60 RAL1019 Grey Beige (Textured) | PT61 RAL7006 Beige Grey (Textured) |
| PT62 RAL1003 Signal Yellow (Textured) | PT63 RAL3001 Signal Red (Textured) | PT64 RAL6001 Emerald Green (Textured) | PT65 RAL5005 Signal Blue (Textured) | PT66 RAL5003 Sapphire Blue (Textured) |

Metallic Paint Colors

| | | | | |
|---|--|--|---|---|
| PT22 Platinum (Metallic Gloss) | PT48 Brass (Metallic Textured) | PT28 Dark Stainless (Metallic Gloss) | PT49 Bronze (Metallic Textured) | PT32 Dark Bronze (Metallic Gloss) |
| PT46 Aluminum (Metallic Textured) | | | | |

Specialty Finishes



More RAL®, Pantone®, and custom finishes are available upon request. Setup fee and additional lead time applies.Call factory for details.