Vienna (2) Bowl Chandelier

AIP8728 32.00 in

JOB NAME:

NOTES:

TYPE:



DESCRIPTION

Our cone collection offers a look previously not available in the market with high-output optical packages. We've taken difficult geometric volume and created luminous visual comfort and high-output indirect lighting in a contemporary form. The family includes pendant, chandelier, wall-mounted, and ceiling models to illuminate and enhance environments where you are looking for a distinct, strong form and proven optical performance.

FEATURES & BENEFITS

- Opal acrylic diffuser lens enhances a space with filtered illumination
- Spun metal trim ring adds high-quality, decorative element to fixture
- Hinge and latch assembly simplifies relamping by eliminating the need to remove and manage fixture bowl
- · Handcrafted in USA

SPECIFICATIONS

- LIGHT SOURCE: White LED light engine or incandescent
- CRI: 90+HE
- Lumen Maintenance: L70 = >50,000 Hrs.
- CCT: Available LED color temperatures: 2700K, 3000K, 3500K, 4000K, 5000K
- DRIVER: LED versions feature integral Class 2 power supply standard
- **DIMMING:** 0-10V controls standard to 10% on LED light engines
- CONTROLS: Contact factory for control options (e.g., Lutron Athena, Current NX, nLight, Enlighted, Encelium, Wattstopper, WaveLinx, or Casambi)
- EMERGENCY: Remote battery option is provided with 10W Constant Power Battery back-up, providing 90 Minutes of Emergency operation. Contact factory for other Emergency options.
- DIFFUSER: Opal acrylic is standard; matte acrylic and hand painted lenses optional. Any upward facing LEDs will be covered with a protective lens.












- **CONSTRUCTION:** Formed metal construction provides durable protection for internal components and is recyclable
- MODIFICATIONS: Consult factory for all modification requests
- APPROVALS: ETL listed to UL standards (US & Canada) for use in damp locations; not recommended for exterior applications

DIMENSIONS



W 22 in 13.1 in 48 in 76.5 in 81.3 cm 33.3 cm 121.9 cm 194.3 cm 194.3 cm 194.3 cm

CONFIGURATOR

To configure your spec sheet online, go to www.spilighting.com/AIP8728. Not all options are available in all configurations; consult factory for details.

Required Field *

Catalog AIP8728	Light Source*	Primary Finish*	Voltage*	Lamp Options*	CRI*	Diffuser*	Mounting*	Emergency	Options	Other Than Standard Options
									Finish:	
		A	В	С	D	E	F	G	Н	1

A - LIGHT SOURCE *

To ensure color consistency, SPI uses precise bin selection and strict quality processes to maintain a 3-step (MacAdam) SDCM on all white LED lampings. Published LED luminaire wattages are calculated using a typical power supply efficiency of 88%; exact wattages may vary based on application.

(2) L86W (2 HEAD) White 86	W LED L	ight Engine Delivered Lumens: 17,031
(2) L172W (2 HEAD) White 1	172W LEE	Light Engine Delivered Lumens: 34,062
(2) 3N150 1 (2 HEAD) 3INC	150W/A2	21
Cust_Out		
Lumen Calculator: Enter L	umens o	or Watts if different than displayed
	LU	Min 17028 - Max 34056
	W	Min 172.0 - Max 344.0

See last page for finish options


¹ Incandescent Lamp(s) Not Included *For requests outside Min-Max range, please contact factory.



B - VOLTAGE *
☐ 120-277V Universal Voltage ☐ 120V ² 120 Volt
For incandescent light source only
C - LAMP OPTIONS *
☐ 2700K 2700К ССТ ☐ 3000K 3000К ССТ ☐ 3500K 3500К ССТ ☐ 4000K 4000К ССТ ☐ 5000K 5000К ССТ
DF_90+HE 90+ High Efficacy
- DIFFUSER *
DF_OA Opal Acrylic Diffuser Lens (default) HP01 Silver Hand Painted Acrylic Diffuser HP02 Beige Hand Painted Acrylic Diffuser HP03 Amber Hand Painted Acrylic Diffuser MA01 Matte Acrylic Diffuser Lens OA HP01 HP02 HP03 MA01 **HP04 HP03 MA01
Mounts to standard 4" octagonal junction box with auxiliary mounting holes. Additional support required (by others). Canopy is 6.5" diameter with a 45 degree swivel.
☐ DF_STM Stem Mount (default)
G - EMERGENCY
10W, Constant Power Battery Back-up, with 90 minutes of emergency operation. EMR includes damp location enclosure for Battery back-up.

H-OPTIONS

KA01 | Angled Aircraft Cable Kit (to Transition Plate/Canopy) (See last page for finish options)
 KR01 | Angled Stem Multi Kit (to Transition Plate) (See last page for finish options)
 KS01 | Straight Stem Multi Kit (to Transition Plate) (See last page for finish options)
 F | Fusing

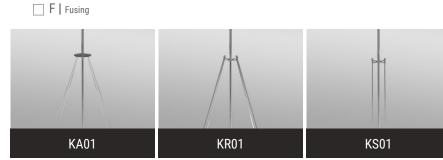

I - OTHER THAN STANDARD OPTIONS

Specify overall height required from ceiling to the bottom of the fixture.

OAH | Pendant suspension length other than standard | Length:



Standard Finishes

The colors shown are representative. Their actual appearance may vary due to differences in display settings. You can request color chips by emailing contact@spilighting.com. Please note, finishes may not be available in all configurations.

Paint Colors

PT01	PT51	PT02	PT04 RAL9001 Cream (Textured)	PT67
RAL9003 Signal White (Gloss)	Matte White (Textured)	White (Textured)		RAL7044 Silk Grey (Textured)
PT53 RAL7035 Light Grey (Textured)	PT54 RAL7037 Dusty Grey (Textured)	PT55 RAL7012 Basalt Grey (Textured)	PT56 RAL7016 Anthracite Grey (Textured)	PT11 Black (Textured)
PT57	PT58 RAL8004 Copper Brown (Textured)	PT59	PT60	PT61
RAL1015 Light Ivory (Textured)		RAL6021 Pale Green (Textured)	RAL1019 Grey Beige (Textured)	RAL7006 Beige Grey (Textured)
PT62 RAL1003 Signal Yellow (Textured)	PT63 RAL3001 Signal Red (Textured)	PT64 RAL6001 Emerald Green (Textured)	PT65 RAL5005 Signal Blue (Textured)	PT66 RAL5003 Sapphire Blue (Textured)

Metallic Paint Colors

PT22 Platinum (Metallic Gloss)	PT48 Brass (Metallic Textured)	PT28 Dark Stainless (Metallic Gloss)	PT49 Bronze (Metallic Textured)	PT32 Dark Bronze (Metallic Gloss)	
PT46					
Aluminum (Metallic Textured)					

Brushed Aluminum



Brushed Brass



Polished-Tinted Brass

ATBR	DTBR	PBR	
Antique Tinted Brass	Dark Tinted Brass	Polished Brass	

Plated Steel

ANST	BBST	CPST	1000	PBST	SNST	
Antique Brass Plated Steel	Brushed Brass Plated Steel	Chrome Plated Steel		Polished Brass Plated Steel	Satin Nickel Steel	
			_			

Polished Plated Brass

CPBR	10000	SNBR	
Chrome Plated Polished Brass		Satin Nickel Plated Brass	
			MALL IN

Specialty Finishes



More RAL®, Pantone®, and custom finishes are available upon request. Setup fee and additional lead time applies.Call factory for details.

