

# Novato Tiers

AIP11987 72.00 in

JOB NAME:  
TYPE:  
NOTES:

## DESCRIPTION

Stunningly elegant, the Novato Tiers chandelier is comprised of five perfectly proportioned Novato Rings. Each ring is fully enclosed and delivers an impressive amount of light. Measuring more than 10 feet tall, this chandelier demands attention and is sure to turn heads. Think of it as a centerpiece in contemporary atriums or lobbies.

### FEATURES & BENEFITS

- Rings measure 24", 36" and 72" in diameter
- Fully enclosed three-sided luminous form brightens horizontal and vertical planes
- Hand-fabricated construction maintains crisp, clean edges
- Specialized high-transmission diffuser offers higher delivered lumens while providing uniform illumination
- Mix and match with entire Novato Family
- Provides functional lighting with comfortable luminance levels
- Single point mounting simplifies installation
- Handcrafted in USA




### SPECIFICATIONS

- **LIGHT SOURCE:** White LED light engine
- **CRI:** 80+ or 90+
- **LUMEN MAINTENANCE:** L70 = >50,000 Hrs.
- **EFFICACY:** 102 lm/W delivered
- **CCT:** 2700K, 3000K, 3500K, 4000K, 5000K
- **VOLTAGE:** 120-277V standard
- **DRIVER:** Integral Class 2 power supply(s)
- **DIMMING:** 1% minimum dim level standard
- **CONTROLS:** 0-10V standard. Lutron Athena, Current NX, and nLight AIR optional. Contact factory for other controls (e.g., Enlighted, Encelium, Wattstopper, WaveLinx, or Casambi).
- **EMERGENCY:** Remote battery option is provided with 10W Constant Power Battery back-up, providing 90 Minutes of Emergency operation. Contact factory for other Emergency options.
- **CONSTRUCTION:** Edges are fused with solvent that permanently

binds acrylic. 24" and 36" rings: diffuser has a seamless bottom and minimal lap joint(s) on its inner and outer surfaces. 72" ring is shipped in 4 segments. Segments are connected by powerful magnetics and secured with a mechanical connection. Plug & play wiring between sections expedites installation.

- **FINISH:** Canopy and mounting components finished to match your specification. Choose from 26 standard thermoset polyester powder coat paint colors. RAL®, Pantone®, or custom finishes available upon request. Each ring's top plate and channel are painted Super White (PT01).
- **MODIFICATIONS:** Consult factory for all modification requests, including alternate sizes or configurations
- **APPROVALS:** ETL listed to UL standards (US & Canada) for use in damp locations; not recommended for exterior applications

DIMENSIONS

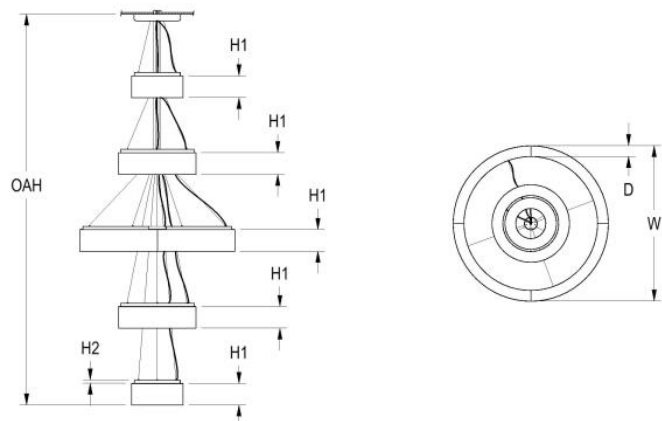

| W                           | H1      | H2     | D       | OAH      |
|-----------------------------|---------|--------|---------|----------|
| 72 in                       | 10 in   | 1.5 in | 5 in    | 181.5 in |
| 182.9 cm                    | 25.4 cm | 3.8 cm | 12.7 cm | 461 cm   |
| <b>Mounting Weight</b>      |         |        |         |          |
| Approximate: 120 lb (55 kg) |         |        |         |          |

CONFIGURATOR

To configure your spec sheet online, go to [www.spilighting.com/AIP11987](http://www.spilighting.com/AIP11987). Not all options are available in all configurations; consult factory for details.

Required Field \*

| Catalog  | Light Source* | Primary Finish* | Voltage* | Lamp Options* | CRI* | Controls* | Diffuser Finish* | Mounting* | Emergency | Other Than Standard Options |
|----------|---------------|-----------------|----------|---------------|------|-----------|------------------|-----------|-----------|-----------------------------|
| AIP11987 |               |                 |          |               |      |           |                  |           |           |                             |
|          | A             |                 | B        | C             | D    | E         | F                | G         | H         | I                           |

A - LIGHT SOURCE \*

To ensure color consistency, SPI uses precise bin selection and strict quality processes to maintain a 3-step (MacAdam) SDCM on all white LED lampings. Published LED luminaire wattages are calculated using a typical power supply efficiency of 88%; exact wattages may vary based on application. Alternative wattages available upon request.

- ☐ **L290W** | White 290W LED Light Engine | Delivered Lumens: 29,580
- ☐ **L581W** | White 581W LED Light Engine | Delivered Lumens: 59,262

See last page for finish options

## B - VOLTAGE \*

☐ **120-277V** | Universal Voltage

## C - LAMP OPTIONS \*

Apply multiplier from chart for delivered lumens at other CCT's and CRI's.

- ☐ **2700K** | 2700K CCT  
☐ **3000K** | 3000K CCT  
☐ **3500K** | 3500K CCT  
☐ **4000K** | 4000K CCT  
☐ **5000K** | 5000K CCT

|       | 80 CRI | 90 CRI |
|-------|--------|--------|
| 2700K | 1.00   | 0.84   |
| 3000K | 1.00   | 0.84   |
| 3500K | 1.00   | 0.84   |
| 4000K | 1.00   | 0.84   |
| 5000K | 1.00   | 0.84   |

## D - CRI \*

- ☐ **DF\_80** | (default)  
☐ **90**

## E - CONTROLS \*

Extended lead times may apply for controls other than 0-10V. Contact factory for additional control options such as Enlighted, Encelium, Wattstopper, WaveLinx, Casambi, or others.

- ☐ **DF\_DIM1** | 0-10V Control, 1% Dimming (default)  
☐ **AWNRR** | Lutron Athena Wireless Node, 1% Dimming  
☐ **NX** | Current NX Wireless, 1% Dimming  
☐ **NLTA** | Acuity nLight Air, 1% Dimming

## F - DIFFUSER FINISH \*


- ☐ **FB00** | Matte Opal Diffuser



G - MOUNTING \*

Mounts using auxiliary mounting holes. Additional support required (by others). Field adjustable aircraft cables allow fixture to be mounted at an application appropriate height (up to OAH). The minimum adjustable cable length is half the diameter of each ring. Cables must be at least 45° to the fixture. Hubs are located inside the top two rings.

☐ **DF\_MIA** | 22" Canopy, Aircraft Cables & White Power Cords



MIA

H - EMERGENCY

10W, Constant Power Battery Back-up, with 90 minutes of emergency operation. EMR includes damp location enclosure for Battery back-up.

☐ **EMR** | Emergency Battery Remote

I - OTHER THAN STANDARD OPTIONS

Specify overall height required from ceiling to the bottom of the fixture.

**OAH** | Pendant suspension length other than standard   Length:

## Standard Finishes

The colors shown are representative. Their actual appearance may vary due to differences in display settings. You can request color chips by emailing [contact@spilighting.com](mailto:contact@spilighting.com). Please note, finishes may not be available in all configurations.

### Paint Colors

|   |  |   |   |   |
|---|--|---|---|---|
| <b>PT01</b><br>RAL9003 Signal White (Gloss)     | <b>PT51</b><br>Matte White (Textured)          | <b>PT02</b><br>White (Textured)                 | <b>PT04</b><br>RAL9001 Cream (Textured)           | <b>PT67</b><br>RAL7044 Silk Grey (Textured)     |
| <b>PT53</b><br>RAL7035 Light Grey (Textured)    | <b>PT54</b><br>RAL7037 Dusty Grey (Textured)   | <b>PT55</b><br>RAL7012 Basalt Grey (Textured)   | <b>PT56</b><br>RAL7016 Anthracite Grey (Textured) | <b>PT11</b><br>Black (Textured)                 |
| <b>PT57</b><br>RAL1015 Light Ivory (Textured)   | <b>PT58</b><br>RAL8004 Copper Brown (Textured) | <b>PT59</b><br>RAL6021 Pale Green (Textured)    | <b>PT60</b><br>RAL1019 Grey Beige (Textured)      | <b>PT61</b><br>RAL7006 Beige Grey (Textured)    |
| <b>PT62</b><br>RAL1003 Signal Yellow (Textured) | <b>PT63</b><br>RAL3001 Signal Red (Textured)   | <b>PT64</b><br>RAL6001 Emerald Green (Textured) | <b>PT65</b><br>RAL5005 Signal Blue (Textured)     | <b>PT66</b><br>RAL5003 Sapphire Blue (Textured) |

### Metallic Paint Colors

|   |  |  |   |   |
|---|--|--|---|---|
| <b>PT22</b><br>Platinum (Metallic Gloss)    | <b>PT48</b><br>Brass (Metallic Textured) | <b>PT28</b><br>Dark Stainless (Metallic Gloss) | <b>PT49</b><br>Bronze (Metallic Textured) | <b>PT32</b><br>Dark Bronze (Metallic Gloss) |
| <b>PT46</b><br>Aluminum (Metallic Textured) |  |  |   |   |

## Specialty Finishes



More RAL®, Pantone®, and custom finishes are available upon request. Setup fee and additional lead time applies.Call factory for details.