

# Monet - Pendant

AIP10486 38.00 in

JOB NAME:

TYPE:

NOTES:

## DESCRIPTION

With a flash of style and a touch of class, Monet makes a lasting impression. Distinctive motifs provide an artistic twist, while vivid color gels and luminous glowing edges complete an energetic design. The Monet family consists of interior sconces, pendants, and ceiling mounts, as well as exterior wall mounts. Efficient, long-lasting LEDs allow Monet to empower a space in a simple, elegant form. Unique low-profile luminaires, Monet pendants are a perfect fit in the Armstrong® TechZone™ Ceiling System and are UL listed for damp locations. With direct and indirect illumination, Monet pendants provide abundant functional illumination, finishing the space design.

## FEATURES & BENEFITS

- External fasteners are not visible, providing a clean fixture design
- Frosted acrylic lens gives the fixture a unique identity with light reflected through the polished edge
- Add a splash of color to a space with optional theatrical color gels offered in four standard colors with custom colors available upon request
- Optional durable wood laminate faceplate adds a warm, natural texture to a space
- Optional embossed stainless steel-linear and crosshatch face plate options add unique, metal accents and textures to a space
- Handcrafted in USA



EMR


## SPECIFICATIONS

- **LIGHT SOURCE:** White LED light engine
- **CRI:** 80+ or 90+
- **LUMEN MAINTENANCE:** L70 = >50,000 Hrs.
- **CCT:** 2700K, 3000K, 3500K, 4000K, 5000K
- **DRIVER:** Integral Class 2 power supply standard
- **DIMMING:** 0-10V controls standard to 1% on LED light engines
- **CONTROLS:** Contact factory for control options (e.g., Lutron Athena, Current NX, nLight, Enlighted, Encelium, Wattstopper, WaveLinx, or Casambi)
- **EMERGENCY:** Remote battery option is provided with 10W Constant Power Battery back-up, providing 90 Minutes of

Emergency operation. Contact factory for other Emergency options.

- **CONSTRUCTION:** Formed metal construction provides durable protection for internal components and is recyclable; stainless steel support cables
- **TOP LENS:** Any upward facing LEDs will be covered with a protective lens
- **FINISH:** Faceplate, housing, and canopies finished to match your specification (unless a faceplate option is specified). Choose from 26 standard thermoset polyester powder coat paint colors or brushed aluminum finish. RAL®, Pantone®, or custom finishes available upon request.
- **MODIFICATIONS:** Consult factory for all modification requests
- **APPROVALS:** ETL listed to UL standards (US & Canada) for use in damp locations; not recommended for exterior applications

DIMENSIONS

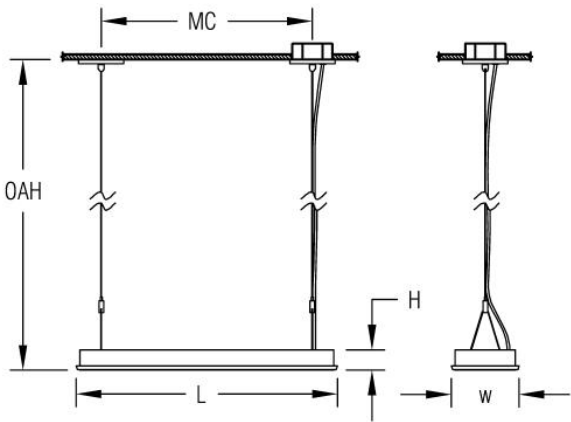

| W   | H              | OAH              | MC               | L                |
|---|----------------|------------------|------------------|------------------|
| 6.7 in<br>17 cm                               | 2 in<br>5.1 cm | 38 in<br>96.5 cm | 31 in<br>78.7 cm | 38 in<br>96.5 cm |
| Mounting Weight<br>Approximate: 25 lb (12 kg) |                |                  |                  |                  |

CONFIGURATOR

To configure your spec sheet online, go to [www.spilighting.com/AIP10486](http://www.spilighting.com/AIP10486). Not all options are available in all configurations; consult factory for details.

Required Field \*

| Catalog  | Light Source* | Primary Finish* | Voltage* | Lamp Options* | CRI* | Mounting* | Emergency | Color Accents* | Faceplate Options | Motif Accents | Other Than Standard Options |
|----------|---------------|-----------------|----------|---------------|------|-----------|-----------|----------------|-------------------|---------------|-----------------------------|
| AIP10486 | A             |                 | B        | C             | D    | E         | F         | G              | H                 | I             | J                           |

A - LIGHT SOURCE \*

To ensure color consistency, SPI uses precise bin selection and strict quality processes to maintain a 3-step (MacAdam) SDCM on all white LED lampings. Published LED luminaire wattages are calculated using a typical power supply efficiency of 88%; exact wattages may vary based on application. Alternative wattages available upon request.

☐ **L86W** | White 86W LED Light Engine | Delivered Lumens: 3,520

☐ **L43W** | White 43W LED Light Engine | Delivered Lumens: 1,760

See last page for finish options

## B - VOLTAGE \*

☐ **120-277V** | Universal Voltage

## C - LAMP OPTIONS \*

Apply multiplier from chart for delivered lumens at other CCT's and CRI's.

- ☐ **2700K** | 2700K CCT
- ☐ **3000K** | 3000K CCT
- ☐ **3500K** | 3500K CCT
- ☐ **4000K** | 4000K CCT
- ☐ **5000K** | 5000K CCT

|       | 80 CRI | 90 CRI |
|-------|--------|--------|
| 2700K | 1.00   | 0.84   |
| 3000K | 1.00   | 0.84   |
| 3500K | 1.00   | 0.84   |
| 4000K | 1.00   | 0.84   |
| 5000K | 1.00   | 0.84   |

## D - CRI \*

- ☐ **DF\_80** | (default)
- ☐ **90**

## E - MOUNTING \*

Field adjustable aircraft cables allow fixture to be mounted at an application appropriate height (up to OAH).

- ☐ **DF\_SBC** | 2.5" x 4.5" Switch-box cover (default)
- ☐ **JBC** | 4" x 4" Junction Box Cover

## F - EMERGENCY


10W, Constant Power Battery Back-up, with 90 minutes of emergency operation. EMR includes damp location enclosure for Battery back-up.

- ☐ **EMR** | Emergency Battery Remote

G - COLOR ACCENTS \*


Matching perimeter edge lighting is standard with color accents. Specify the No Perimeter Edge Color (NPC) option for a pure white luminous border. Contact factory to customize a color gel that coordinates with your application.

- ☐ **DF\_CG00** | White Color Gel (default)
- ☐ **CG01** | Red Color Gel
- ☐ **CG02** | Orange Color Gel
- ☐ **CG03** | Green Color Gel
- ☐ **CG04** | Blue Color Gel
- ☐ **NPC** | No Perimeter Edge Color

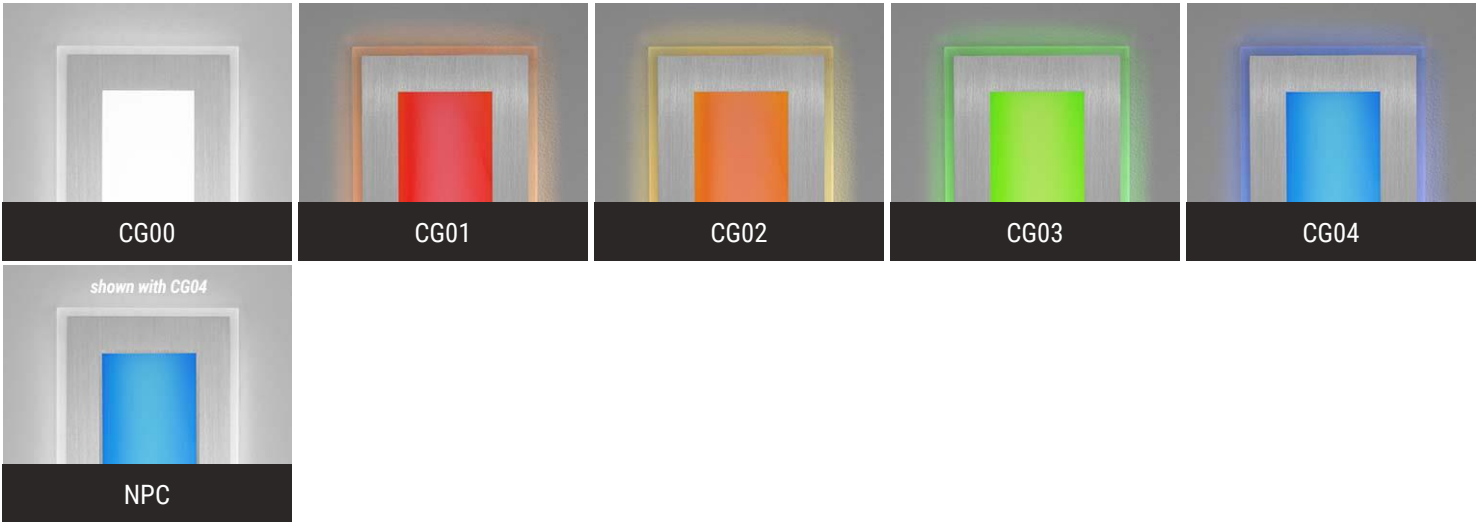

H - FACEPLATE OPTIONS


- ☐ **ES1** | Embossed Stainless Steel-Linear Pattern
- ☐ **ES2** | Embossed Stainless Steel-Cross Hatch Pattern
- ☐ **WF1** | Cherry Laminate
- ☐ **WF2** | Maple Laminate

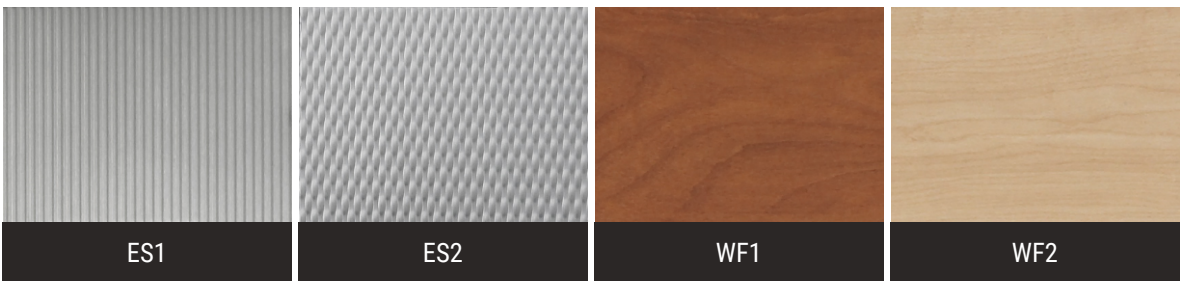

I - MOTIF ACCENTS

Optional motif is black, unless specified.

- ☐ **FP01** | Open
- ☐ **FP02** | Boxes
- ☐ **FP03** | Cross Ends
- ☐ **FP04** | Split
- ☐ **FP05** | Split 2
- ☐ **FP06** | Prairie
- ☐ **FP07** | Thatch
- ☐ **FP08** | Squares
- ☐ **FP09** | Perforated
- ☐ **FP10** | Parquet

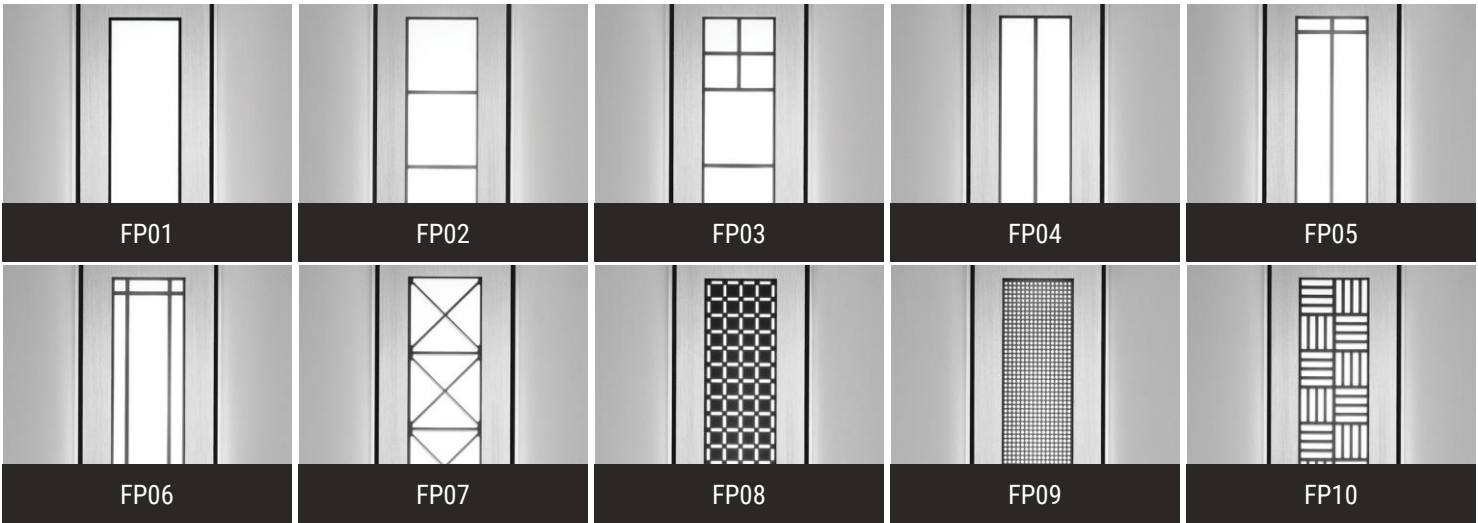

J - OTHER THAN STANDARD OPTIONS

Specify overall height required from ceiling to the bottom of the fixture.

**OAH** | Pendant suspension length other than standard Length:

## Standard Finishes

The colors shown are representative. Their actual appearance may vary due to differences in display settings. You can request color chips by emailing [contact@spilighting.com](mailto:contact@spilighting.com). Please note, finishes may not be available in all configurations.

### Paint Colors

|   |  |   |   |   |
|---|--|---|---|---|
| <b>PT01</b><br>RAL9003 Signal White (Gloss)     | <b>PT51</b><br>Matte White (Textured)          | <b>PT02</b><br>White (Textured)                 | <b>PT04</b><br>RAL9001 Cream (Textured)           | <b>PT67</b><br>RAL7044 Silk Grey (Textured)     |
| <b>PT53</b><br>RAL7035 Light Grey (Textured)    | <b>PT54</b><br>RAL7037 Dusty Grey (Textured)   | <b>PT55</b><br>RAL7012 Basalt Grey (Textured)   | <b>PT56</b><br>RAL7016 Anthracite Grey (Textured) | <b>PT11</b><br>Black (Textured)                 |
| <b>PT57</b><br>RAL1015 Light Ivory (Textured)   | <b>PT58</b><br>RAL8004 Copper Brown (Textured) | <b>PT59</b><br>RAL6021 Pale Green (Textured)    | <b>PT60</b><br>RAL1019 Grey Beige (Textured)      | <b>PT61</b><br>RAL7006 Beige Grey (Textured)    |
| <b>PT62</b><br>RAL1003 Signal Yellow (Textured) | <b>PT63</b><br>RAL3001 Signal Red (Textured)   | <b>PT64</b><br>RAL6001 Emerald Green (Textured) | <b>PT65</b><br>RAL5005 Signal Blue (Textured)     | <b>PT66</b><br>RAL5003 Sapphire Blue (Textured) |

### Metallic Paint Colors

|   |  |  |   |   |
|---|--|--|---|---|
| <b>PT22</b><br>Platinum (Metallic Gloss)    | <b>PT48</b><br>Brass (Metallic Textured) | <b>PT28</b><br>Dark Stainless (Metallic Gloss) | <b>PT49</b><br>Bronze (Metallic Textured) | <b>PT32</b><br>Dark Bronze (Metallic Gloss) |
| <b>PT46</b><br>Aluminum (Metallic Textured) |  |  |   |   |

### Brushed Aluminum

|                                |
|--------------------------------|
| <b>BAL</b><br>Brushed Aluminum |
|--------------------------------|

## Specialty Finishes



More RAL®, Pantone®, and custom finishes are available upon request. Setup fee and additional lead time applies.Call factory for details.