

# Sebring Exterior - Single Bars

AEW9904 17.70 in

JOB NAME:

TYPE:

NOTES:

## DESCRIPTION


The Sebring is a wet location, ADA compliant sconce providing a path of egress lighting with sophisticated style. Color gels can add a vivid splash of color to complement our palette of powder coat or metal finishes. Sebring enhances a project by allowing design continuity, inside and out.

## FEATURES & BENEFITS

- Solid metal accents add high-quality, decorative element to fixture
- Add a splash of color to a space with optional theatrical color gels (offered in five standard colors with custom colors available upon request)
- Compliant with Americans with Disabilities Act (ADA) requirements
- Handcrafted in USA


## SPECIFICATIONS

- **LIGHT SOURCE:** IP66 white LED light engine or incandescent
- **CRI:** 90+HE
- **LUMEN MAINTENANCE:** L70 = >50,000 Hrs.
- **CCT:** Available LED color temperatures: 2700K, 3000K, 3500K, 4000K, 5000K
- **DRIVER:** Integral Class 2 power supply standard
- **DIMMING:** 0-10V controls standard to 1% on LED light engines
- **CONTROLS:** Contact factory for control options (e.g., Lutron Athena, Current NX, nLight, Enlighted, Encelium, Wattstopper, WaveLinx, or Casambi)
- **EMERGENCY:** Remote battery option is provided with 10W Constant Power Battery back-up, providing 90 Minutes of Emergency operation. Contact factory for other Emergency options.
- **LENS:** Top lens and bottom lens standard with any LED module
- **CONSTRUCTION:** Formed metal construction provides durable protection for internal components and is recyclable. Flush front. Top and bottom glass lensing.

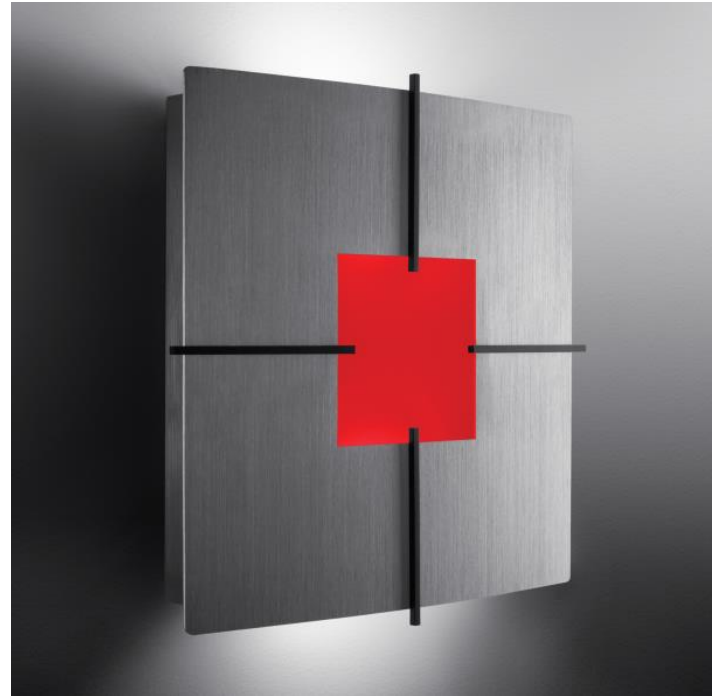

- **FINISH:** The face plate is aluminum and available in brushed or painted finishes. Accents are available in brushed brass or can be painted.
- **MOUNTING:** Mounts to standard 4" octagonal junction box
- **MODIFICATIONS:** Consult factory for all modification requests
- **APPROVALS:** ETL listed to UL standards (US and Canada) for use in wet locations

### DIMENSIONS

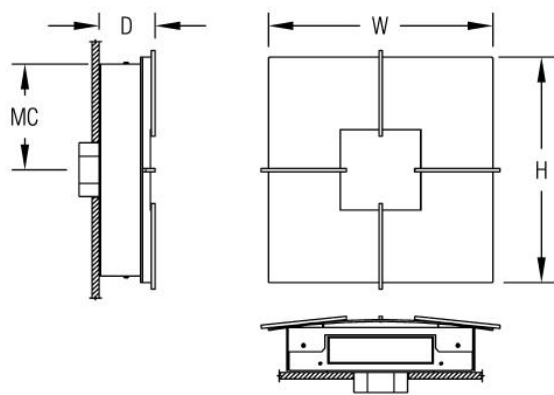

W	H	D	MC
17.7 in	17.7 in	4 in	8.8 in
45 cm	45 cm	10.2 cm	22.4 cm

**Mounting Weight**  
Approximate: 25 lb (12 kg)

### CONFIGURATOR

To configure your spec sheet online, go to [www.spilighting.com/AEW9904](http://www.spilighting.com/AEW9904). Not all options are available in all configurations; consult factory for details.

#### Required Field \*

Catalog AEW9904	Light Source*	Primary Finish*	Voltage*	Lamp Options*	CRI*	Emergency	Accents*	Color Accents*
							Finish:	
	A		B	C	D	E	F	G

### A - LIGHT SOURCE \*

To ensure color consistency, SPI uses precise bin selection and strict quality processes to maintain a 3-step (MacAdam) SDCM on all white LED lampings. Published LED luminaire wattages are calculated using a typical power supply efficiency of 88%; exact wattages may vary based on application. Alternative wattages available upon request.

- ☐ **L29W** | White 29W LED Light Engine
 

Delivered Lumens: 833
- ☐ **L14W** | White 14W LED Light Engine
 

Delivered Lumens: 416
- ☐ **2N75** <sup>1</sup> | 2INC75W/A19
- ☐ **Cust\_Out** |

**Lumen Calculator:** Enter Lumens or Watts if different than displayed

LU

Min 406 - Max 841

W

Min 14.0 - Max 29.0

See last page for finish options

<sup>1</sup> Incandescent Lamp(s) Not Included  
\*For requests outside Min-Max range, please contact factory.

## B - VOLTAGE \*

---

- ☐ 120-277V | Universal Voltage  
☐ 120V <sup>2</sup> | 120 Volt

<sup>2</sup> For incandescent light source only

## C - LAMP OPTIONS \*

---

Apply multiplier from chart for delivered lumens at other CCT's and CRI's. Not required with incandescent.

- ☐ 2700K | 2700K CCT  
☐ 3000K | 3000K CCT  
☐ 3500K | 3500K CCT  
☐ 4000K | 4000K CCT  
☐ 5000K | 5000K CCT

## D - CRI \*

---

- ☐ DF\_90+HE | 90+ High Efficacy

## E - EMERGENCY

---

10W, Constant Power Battery Back-up, with 90 minutes of emergency operation. EMR-Damp includes damp location enclosure for Battery back-up. EMR-W/L includes a wet location enclosure for battery back-up.

- ☐ EMR-DAMP | Emergency Battery Remote - Damp Location  
☐ EMR-W/L | Emergency Battery Remote - Wet Location

## F - ACCENTS \*

---

- ☐ ACC | Decorative Accents (See last page for finish options)

## G - COLOR ACCENTS \*

---

Contact factory to customize a color gel that coordinates with your application.

- ☐ CG00 | White Color Gel  
☐ CG01 | Red Color Gel  
☐ CG02 | Orange Color Gel  
☐ CG03 | Green Color Gel  
☐ CG04 | Blue Color Gel



CG00



CG01



CG02



CG03



CG04

## Standard Finishes

The colors shown are representative. Their actual appearance may vary due to differences in display settings. You can request color chips by emailing [contact@spilighting.com](mailto:contact@spilighting.com). Please note, finishes may not be available in all configurations.

### Paint Colors

<b>PT01</b> RAL9003 Signal White (Gloss)	<b>PT51</b> Matte White (Textured)	<b>PT02</b> White (Textured)	<b>PT04</b> RAL9001 Cream (Textured)	<b>PT67</b> RAL7044 Silk Grey (Textured)
<b>PT53</b> RAL7035 Light Grey (Textured)	<b>PT54</b> RAL7037 Dusty Grey (Textured)	<b>PT55</b> RAL7012 Basalt Grey (Textured)	<b>PT56</b> RAL7016 Anthracite Grey (Textured)	<b>PT11</b> Black (Textured)
<b>PT57</b> RAL1015 Light Ivory (Textured)	<b>PT58</b> RAL8004 Copper Brown (Textured)	<b>PT59</b> RAL6021 Pale Green (Textured)	<b>PT60</b> RAL1019 Grey Beige (Textured)	<b>PT61</b> RAL7006 Beige Grey (Textured)
<b>PT62</b> RAL1003 Signal Yellow (Textured)	<b>PT63</b> RAL3001 Signal Red (Textured)	<b>PT64</b> RAL6001 Emerald Green (Textured)	<b>PT65</b> RAL5005 Signal Blue (Textured)	<b>PT66</b> RAL5003 Sapphire Blue (Textured)

### Metallic Paint Colors

<b>PT22</b> Platinum (Metallic Gloss)	<b>PT48</b> Brass (Metallic Textured)	<b>PT28</b> Dark Stainless (Metallic Gloss)	<b>PT49</b> Bronze (Metallic Textured)	<b>PT32</b> Dark Bronze (Metallic Gloss)
<b>PT46</b> Aluminum (Metallic Textured)				

### Brushed Aluminum

<b>BAL</b> Brushed Aluminum
--------------------------------

### Brushed Brass

<b>BBR</b> Brushed Solid Brass
-----------------------------------

## Specialty Finishes



More RAL®, Pantone®, and custom finishes are available upon request. Setup fee and additional lead time applies.Call factory for details.