

# Harbor Exterior - Medallion

**SPI**LIGHTING

PROJECT DETAILS

AEW8071 22.00 in

JOB NAME:

TYPE:

NOTES:

## DESCRIPTION

Accenting the Harbor half cylinder sconce are two 1/4" x 1/2" horizontal bars along with a decorative medallion. The clean lines of this exterior sconce are perfect for multiple applications including offices, retail buildings, and health care facilities. Choose from a palette of both painted and metal finishes.

## FEATURES & BENEFITS


- Opal top and bottom lens protects fixture and provides uniform illumination
- Two lens removal options provide application flexibility
- Interior family fixtures available to carry a consistent lighting design throughout a project
- Handcrafted in USA

## SPECIFICATIONS

- **LIGHT SOURCE:** White LED light engine
- **CRI:** 80+ or 90+
- **LUMEN MAINTENANCE:** L70 = >50,000 Hrs.
- **CCT:** 2700K, 3000K, 3500K, 4000K, 5000K
- **DRIVER:** Integral Class 2 power supply standard
- **DIMMING:** 0-10V controls standard to 1% on LED light engines
- **CONTROLS:** Contact factory for control options (e.g., Lutron Athena, Current NX, nLight, Enlighted, Encelium, Wattstopper, WaveLinx, or Casambi)
- **EMERGENCY:** Remote battery option is provided with 10W Constant Power Battery back-up, providing 90 Minutes of Emergency operation. Contact factory for other Emergency options.
- **DIFFUSER:** Formed opal acrylic lens
- **MOUNTING:** Mounts to standard 4" octagonal junction box
- **MODIFICATIONS:** Consult factory for all modification requests
- **APPROVALS:** ETL listed to UL standards (US & Canada) for use in wet locations



DIMENSIONS

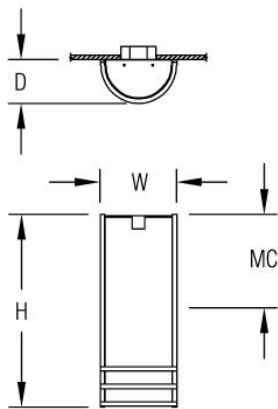

|                            |          |          |           |
|----------------------------|----------|----------|-----------|
| <b>W</b>                   | <b>H</b> | <b>D</b> | <b>MC</b> |
| 9 in                       | 22 in    | 5 in     | 11 in     |
| 22.9 cm                    | 55.9 cm  | 12.7 cm  | 27.9 cm   |
| <b>Mounting Weight</b>     |          |          |           |
| Approximate: 25 lb (12 kg) |          |          |           |

CONFIGURATOR

To configure your spec sheet online, go to [www.spilighting.com/AEW8071](http://www.spilighting.com/AEW8071). Not all options are available in all configurations; consult factory for details.

Required Field \*

|         |               |                 |          |               |      |           |           |                    |
|---------|---------------|-----------------|----------|---------------|------|-----------|-----------|--------------------|
| Catalog | Light Source* | Primary Finish* | Voltage* | Lamp Options* | CRI* | Emergency | End Caps* | Lens Installation* |
| AEW8071 |               |                 |          |               |      |           |           |                    |
|         |               |                 |          |               |      |           | Finish:   | Finish:            |
|         | A             |                 | B        | C             | D    | E         | F         | G                  |

A - LIGHT SOURCE \*

To ensure color consistency, SPI uses precise bin selection and strict quality processes to maintain a 3-step (MacAdam) SDCM on all white LED lampings. Published LED luminaire wattages are calculated using a typical power supply efficiency of 88%; exact wattages may vary based on application.

- ☐ **L22W** | White 22W LED Light Engine| Delivered Lumens: 1,501
- ☐ **L43W** | White 43W LED Light Engine| Delivered Lumens: 3,002

See last page for finish options

B - VOLTAGE \*

- ☐ **120-277V** | Universal Voltage

C - LAMP OPTIONS \*

Apply multiplier from chart for delivered lumens at other CCT's and CRI's.

- ☐ **2700K** | 2700K CCT
- ☐ **3000K** | 3000K CCT
- ☐ **3500K** | 3500K CCT
- ☐ **4000K** | 4000K CCT
- ☐ **5000K** | 5000K CCT

|       | 80 CRI | 90 CRI |
|-------|--------|--------|
| 2700K | 1.00   | 0.84   |
| 3000K | 1.00   | 0.84   |
| 3500K | 1.00   | 0.84   |
| 4000K | 1.00   | 0.84   |
| 5000K | 1.00   | 0.84   |

### D - CRI \*

- ☐ **DF\_80** | (default)
- ☐ **90**

### E - EMERGENCY


10W, Constant Power Battery Back-up, with 90 minutes of emergency operation. EMR-Damp includes damp location enclosure for Battery back-up. EMR-W/L includes a wet location enclosure for battery back-up.

- ☐ **EMR-DAMP** | Emergency Battery Remote - Damp Location
- ☐ **EMR-W/L** | Emergency Battery Remote - Wet Location

### F - END CAPS \*

Specify Luminous or Solid end cap for bottom only. The top is always luminous.

- ☐ **DF\_LUM** | Luminous (default)
- ☐ **SLD** | Solid (See last page for finish options)

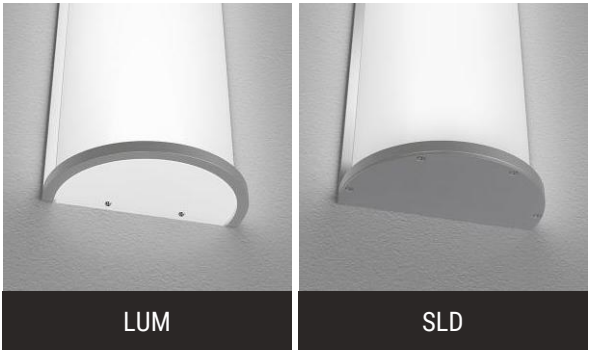


### G - LENS INSTALLATION \*

INST2 includes ball nuts on vertical bars to remove lens.

- ☐ **DF\_INST1** | Slides Out (default)
- ☐ **INST2** | Pulls Straight Out (See last page for finish options)



INST1



INST2

## Standard Finishes

The colors shown are representative. Their actual appearance may vary due to differences in display settings. You can request color chips by emailing [contact@spilighting.com](mailto:contact@spilighting.com). Please note, finishes may not be available in all configurations.

### Paint Colors

|   |  |   |   |   |
|---|--|---|---|---|
| <b>PT01</b><br>RAL9003 Signal White (Gloss)     | <b>PT51</b><br>Matte White (Textured)          | <b>PT02</b><br>White (Textured)                 | <b>PT04</b><br>RAL9001 Cream (Textured)           | <b>PT67</b><br>RAL7044 Silk Grey (Textured)     |
| <b>PT53</b><br>RAL7035 Light Grey (Textured)    | <b>PT54</b><br>RAL7037 Dusty Grey (Textured)   | <b>PT55</b><br>RAL7012 Basalt Grey (Textured)   | <b>PT56</b><br>RAL7016 Anthracite Grey (Textured) | <b>PT11</b><br>Black (Textured)                 |
| <b>PT57</b><br>RAL1015 Light Ivory (Textured)   | <b>PT58</b><br>RAL8004 Copper Brown (Textured) | <b>PT59</b><br>RAL6021 Pale Green (Textured)    | <b>PT60</b><br>RAL1019 Grey Beige (Textured)      | <b>PT61</b><br>RAL7006 Beige Grey (Textured)    |
| <b>PT62</b><br>RAL1003 Signal Yellow (Textured) | <b>PT63</b><br>RAL3001 Signal Red (Textured)   | <b>PT64</b><br>RAL6001 Emerald Green (Textured) | <b>PT65</b><br>RAL5005 Signal Blue (Textured)     | <b>PT66</b><br>RAL5003 Sapphire Blue (Textured) |

### Brushed Copper

|                                    |
|------------------------------------|
| <b>BCU</b><br>Brushed Solid Copper |
|------------------------------------|

### Metallic Paint Colors

|   |  |  |   |   |
|---|--|--|---|---|
| <b>PT22</b><br>Platinum (Metallic Gloss)    | <b>PT48</b><br>Brass (Metallic Textured) | <b>PT28</b><br>Dark Stainless (Metallic Gloss) | <b>PT49</b><br>Bronze (Metallic Textured) | <b>PT32</b><br>Dark Bronze (Metallic Gloss) |
| <b>PT46</b><br>Aluminum (Metallic Textured) |  |  |   |   |

### Natural Copper

|                                    |
|------------------------------------|
| <b>CU</b><br>Distressed Raw Copper |
|------------------------------------|

### Brushed Aluminum

|                                |
|--------------------------------|
| <b>BAL</b><br>Brushed Aluminum |
|--------------------------------|

### Brushed Brass

|                                   |
|-----------------------------------|
| <b>BBR</b><br>Brushed Solid Brass |
|-----------------------------------|

### Polished-Tinted Brass

|                                     |                                  |                              |
|-------------------------------------|----------------------------------|------------------------------|
| <b>ATBR</b><br>Antique Tinted Brass | <b>DTBR</b><br>Dark Tinted Brass | <b>PBR</b><br>Polished Brass |
|-------------------------------------|----------------------------------|------------------------------|

### Polished Plated Brass

|   |  |
|---|--|
| <b>CPBR</b><br>Chrome Plated Polished Brass | <b>SNBR</b><br>Satin Nickel Plated Brass |
|---|--|

# Specialty Finishes

---



More RAL®, Pantone®, and custom finishes are available upon request. Setup fee and additional lead time applies. Call factory for details.