INACTIVE SPEC SHEET

Lisbon - Ceiling

AIC8785 44.00 in



JOB NAME: TYPE:

NOTES:

DESCRIPTION

This classic collection offers the proven simplicity and purity of timeless geometry. When mid to high height ceiling applications present themselves, this luminaire delivers the style and performance to accomplish the tasks at hand.

FEATURES & BENEFITS

- Opal acrylic diffuser lens enhances a space with filtered illumination
- Spun metal trim ring adds high-quality, decorative element to fixture
- · Handcrafted in USA

SPECIFICATIONS


- LIGHT SOURCE: White LED light engine or incandescent
- LUMEN MAINTENANCE (LED): L70 = >50,000 Hrs.
- CCT: Available LED color temperatures: 3000K, 3500K, or 4000K
- DRIVER: LED versions feature integral Class II power supply standard
- **DIMMING:** 0-10V controls standard on LED light engines
- EMERGENCY: Emergency battery remote optional
- DIFFUSER: Opal acrylic is standard; matte acrylic and hand painted lenses optional
- **CONSTRUCTION:** Formed metal construction provides durable protection for internal components and is recyclable
- MOUNTING: Aluminum cover fits over a standard 4" octagonal junction box
- MODIFICATIONS: Consult factory for all modification requests
- APPROVALS: ETL listed to UL standards (US & Canada) for use in damp locations; not recommended for exterior applications







DIMENSIONS

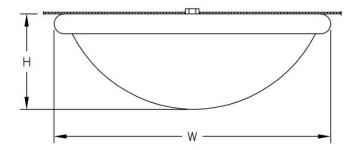




CONFIGURATOR

To configure your spec sheet online, go to www.spilighting.com/AIC8785. Not all options are available in all configurations; consult factory for details.

Required Field *



A - LIGHT SOURCE *

To ensure color consistency, SPI uses precise bin selection and strict quality processes to maintain a 3-step (MacAdam) SDCM on all white LED lampings. Published LED luminaire wattages are calculated using a typical power supply efficiency of 88%; exact wattages may vary based on application.

L57W | White 57W LED Light Engine

L115W | White 115W LED Light Engine

3N150 1 | 3INC150W/A21

See last page for finish options

¹ Incandescent Lamp(s) Not Included

B-VOLTAGE*

☐ 120-277V | Universal Voltage

120V² | 120 Volt

² For incandescent light source only

C - LAMP OPTIONS *

Delivered lumens shown are at 4000K CCT; apply multiplier for delivered lumens at other CCT.
 З000К ³ 3000К ССТ З500К ⁴ 3500К ССТ 4000К 4000К ССТ
Apply .95 multiplier for delivered lumens
Apply .97 multiplier for delivered lumens
- DIFFUSER *
 □ DF_OA Opal Acrylic Diffuser Lens (default) □ HP01 Silver Hand Painted Acrylic Diffuser □ HP02 Beige Hand Painted Acrylic Diffuser □ HP03 Amber Hand Painted Acrylic Diffuser □ MA01 Matte Acrylic Diffuser Lens
OA HP01 HP02 HP03 MA01 3 - BOWL OPTIONS
FIN Finial (See last page for finish options) HP03-FIN Amber Hand Painted Actylic Diffuser with Finial (See last page for finish options)
- OPTIONS
☐ F Fusing

Standard Finishes

The colors shown are representative. Their actual appearance may vary due to differences in display settings. You can request color chips by emailing contact@spilighting.com. Please note, finishes may not be available in all configurations.

Paint Colors

PT01	PT51	PT02	PT04	PT11
RAL9003 Signal White (Gloss)	Matte White (Textured)	White (Textured)	RAL9001 Cream (Textured)	Black (Textured)

Metallic Paint Colors

PT22 Platinum (Metallic Gloss)	PT48 Brass (Metallic Textured)	PT28 Dark Stainless (Metallic Gloss)	PT49 Bronze (Metallic Textured)	PT32 Dark Bronze (Metallic Gloss)
PT46 Aluminum (Metallic Textured)				

Brushed Aluminum

BAL	
Brushed Aluminum	

Plated Steel

ANST		BBST	CPST	PBST	SNST
Antique Brass Plated Steel		Brushed Brass Plated Steel	Chrome Plated Steel	Polished Brass Plated Steel	Satin Nickel Steel
	Contract of the				

Specialty Finishes



More RAL®, Pantone®, and custom finishes are available upon request. Setup fee and additional lead time applies. Call factory for details.