Minsk - Bowl on Arm

AIW8864 21.50 in

JOB NAME:

TYPE:

NOTES:



DESCRIPTION

Our drum collection was inspired to create something different and new in the world of luminous lighting products, yet we find this simple form offers classic lines and patterns. Its application can approach a broad array of architectural environments for a new and fresh approach without losing its appeal in the years to come. The family includes pendant, chandelier, wall-mounted, and ceiling models to illuminate and enhance environments where you are looking to break stride with the past.

FEATURES & BENEFITS

- Opal acrylic diffuser lens enhances a space with filtered illumination
- Spun metal trim ring adds high-quality, decorative element to fixture
- Separate circuit wiring on fluorescent lampings with both direct and indirect sources provide the ability to control up and downlight.
- Hinge and latch assembly simplifies relamping by eliminating the need to remove and manage fixture bowl
- · Handcrafted in USA

SPECIFICATIONS

- LIGHT SOURCE: White LED light engine or incandescent
- CRI: 80+ or 90+
- LUMEN MAINTENANCE: L70 = >50,000 Hrs.
- CCT: Available LED color temperatures: 2700K, 3000K, 3500K, 4000K, 5000K
- DRIVER: LED versions feature integral Class 2 power supply standard
- **DIMMING:** 0-10V controls standard to 10% on LED light engines
- CONTROLS: Contact factory for control options (e.g., Lutron Athena, Current NX, nLight, Enlighted, Encelium, Wattstopper, WaveLinx, or Casambi)
- EMERGENCY: Remote battery option is provided with 10W
 Constant Power Battery back-up, providing 90 Minutes of
 Emergency operation. Contact factory for other Emergency








options.

- DIFFUSER: Opal acrylic is standard; matte acrylic and hand painted lenses optional. Top lens standard with any LED module.
- **CONSTRUCTION:** Formed metal construction provides durable protection for internal components and is recyclable
- MOUNTING: Mounts to standard 4" octagonal junction box;
 additional mounting structure and hardware required (by others)
- MODIFICATIONS: Consult factory for all modification requests
- APPROVALS: ETL listed to UL standards (US & Canada) for use in damp locations; not recommended for exterior applications

DIMENSIONS

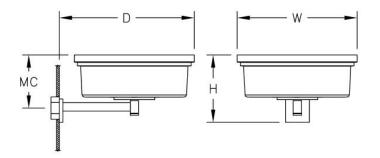

W	H	D	MC				
21.5 in	12 in	24 in	9.5 in				
54.6 cm	30.5 cm	61 cm	24.1 cm				
Mounting Weight Approximate: 25 lb (12 kg)							

CONFIGURATOR

To configure your spec sheet online, go to www.spilighting.com/AIW8864. Not all options are available in all configurations; consult factory for details.

Required Field *

Catalog	Light Source*	Primary Finish*	Voltage*	Lamp Options*	CRI*	Diffuser*	Emergency	Options
AIW8864								
	1	A	В	C	D	E	F	G

A - LIGHT SOURCE *

To ensure color consistency, SPI uses precise bin selection and strict quality processes to maintain a 3-step (MacAdam) SDCM on all white LED lampings. Published LED luminaire wattages are calculated using a typical power supply efficiency of 88%; exact wattages may vary based on application.

 $\hfill L29W$ | White 29W LED Light Engine | Delivered Lumens: 2,826

L57W | White 57W LED Light Engine | Delivered Lumens: 5,652

☐ **1N300** ¹ | 1INC300W/PS30

See last page for finish options

¹ Incandescent Lamp(s) Not Included



		10	 	
u	_ \		 A II -	

	120-277V	Universal Voltage
--	----------	-------------------

C-LAMP OPTIONS*

Apply multiplier from chart for delivered lumens at other CCT's and CRI's. Not required with incandescent.

- **2700K |** 2700K CCT
- 3000K | 3000K CCT
- **3500K** | 3500K CCT
- ☐ 4000K | 4000K CCT
- **5000K |** 5000K CCT

	80 CRI	90 CRI
2700K	1.00	0.84
3000K	1.00	0.84
3500K	1.00	0.84
4000K	1.00	0.84
5000K	1.00	0.84

D - CRI *

DF_80 | (default)

90

E - DIFFUSER *

	DF_OA	Opal Acrylic Diffuser Lens	(default)
--	-------	----------------------------	-----------

- ☐ **HP01** | Silver Hand Painted Acrylic Diffuser
- HP02 | Beige Hand Painted Acrylic Diffuser
- ☐ **HP03** | Amber Hand Painted Acrylic Diffuser
- MA01 | Matte Acrylic Diffuser Lens



[☐] **120V ²** | 120 Volt

² For incandescent light source only

10W	V, Constant Power Battery Back-up, with 90 minutes of emergency operation. EMR includes damp location enclosure for Battery back-up.
	EMR Emergency Battery Remote
G - 0	PTIONS
	F Fusing



F - EMERGENCY

Standard Finishes

The colors shown are representative. Their actual appearance may vary due to differences in display settings. You can request color chips by emailing contact@spilighting.com. Please note, finishes may not be available in all configurations.

Paint Colors

PT01	PT51	PT02	PT04 RAL9001 Cream (Textured)	PT67
RAL9003 Signal White (Gloss)	Matte White (Textured)	White (Textured)		RAL7044 Silk Grey (Textured)
PT53 RAL7035 Light Grey (Textured)	PT54 RAL7037 Dusty Grey (Textured)	PT55 RAL7012 Basalt Grey (Textured)	PT56 RAL7016 Anthracite Grey (Textured)	PT11 Black (Textured)
PT57	PT58 RAL8004 Copper Brown (Textured)	PT59	PT60	PT61
RAL1015 Light Ivory (Textured)		RAL6021 Pale Green (Textured)	RAL1019 Grey Beige (Textured)	RAL7006 Beige Grey (Textured)
PT62 RAL1003 Signal Yellow (Textured)	PT63 RAL3001 Signal Red (Textured)	PT64 RAL6001 Emerald Green (Textured)	PT65 RAL5005 Signal Blue (Textured)	PT66 RAL5003 Sapphire Blue (Textured)

Metallic Paint Colors

PT22	PT48	PT28	PT49	PT32
Platinum (Metallic Gloss)	Brass (Metallic Textured)	Dark Stainless (Metallic Gloss)	Bronze (Metallic Textured)	Dark Bronze (Metallic Gloss)
PT46				
Aluminum (Metallic Textured)				

Brushed Aluminum

BAL	
Brushed Aluminum	

Brushed Brass



Polished-Tinted Brass

ATBR	DTBR	PBR	1000
Antique Tinted Brass	Dark Tinted Brass	Polished Brass	

Plated Steel

ANST	BBST	CPST	1000	PBST	SNST	
Antique Brass Plated Steel	Brushed Brass Plated Steel	Chrome Plated Steel		Polished Brass Plated Steel	Satin Nickel Steel	
			-			

Polished Plated Brass

C	CPBR		SNBR	
С	Chrome Plated Polished Brass		Satin Nickel Plated Brass	
	_	r. a		MALE .

Specialty Finishes



More RAL®, Pantone®, and custom finishes are available upon request. Setup fee and additional lead time applies. Call factory for details.

