INACTIVE SPEC SHEET

Brace Exterior - Remote

SEW10349 48.30 in

SPILIGHTING PROJECT DETAILS

JOB NAME: TYPE:

NOTES:

DESCRIPTION


Sleek and modern, Brace provides the clean appearance desired by today's architects and designers. It delivers maximized light output, as well as creates an inviting and comfortable space utilizing efficient T5 and T5HOs. UL listed for wet locations, this wall-mounted fixture offers remote ballasts and various shielding options. Available in two distinct looks, this sleek luminaire presents versions satisfying ADA requirements. It has the ability to add the finishing touch to modern lighting designs.

FEATURES & BENEFITS

- Extruded frosted acrylic tube with aluminum end caps maximizes output and creates uniform illumination
- Versatile design allows fixture to be mounted in any orientation
- Compliant with Americans with Disabilities Act (ADA) requirements
- · Handcrafted in USA

SPECIFICATIONS

- LIGHT SOURCE: Fluorescent
- BALLAST: Remote electronic ballast utilizes the latest energy-saving technology to maintain consistent color temperature, CRI and lumen maintenance, while allowing for consolidation of ballasts. Class "A" sound rated ballast for use in low ambient noise applications. Meets NEC 410.73 double-ended, fluorescent lamp ballast disconnect requirements.
- TEMPERATURE: Thermally protected ballast limits operating temperature
- FINISH: Housing and mounting finished painted to match. To specify separately, contact factory. Choose from 26 standard thermoset polyester powder coat paint colors or anodized finishes. RAL®, Pantone®, or custom finishes available upon request.
- MODIFICATIONS: Consult factory for all modification requests
- APPROVALS: ETL listed to UL standards (US and Canada) for use in wet locations

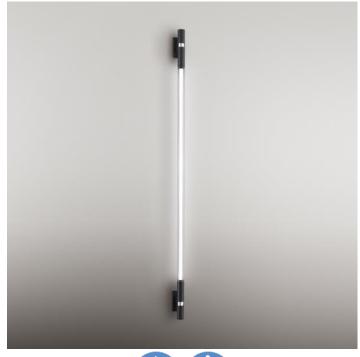








DIMENSIONS



W	H	D	MC
1.5 in	48.3 in	3.2 in	41.6 in
3.8 cm	122.7 cm	8.1 cm	105.7 cm

Mounting Weight Approximate: 25 lb (12 kg)

CONFIGURATOR

To configure your spec sheet online, go to www.spilighting.com/SEW10349. Not all options are available in all configurations; consult factory for details.

Required Field *

Catalog	Light Source*	Primary Finish*	Voltage*	Mounting*	Shield Options	Options
SEW10349						
						Finish
						Finish:
	Δ		B	C	D	F

A - LIGHT SOURCE *

☐ 1F21 ¹	1 1F21W	Γ5/Mini	Bipin
---------------------	---------	---------	-------

See last page for finish options

B - VOLTAGE *

120V | 120 Volt

277V | 277 Volt

C-MOUNTING*

Choose a mounting from below:

DF_SBC | 2.5" x 4.4" Switch-box cover (default)

LBC | 4.4" x 4.4" J-Box Cover

[☐] **1F39** ¹ | 1F39WT5HO/Mini Bipin

¹ T5 & T8 Fluorescent Linear Lamp(s) Not Included



D - SHIELD OPTIONS

SOS | Symmetric Opal Shield

SPS | Symmetric Perforated Shield

SSR | Symmetric Solid Reflector







E - OPTIONS

AOS | Asymmetric Opal Shield

APS | Asymmetric Perforated Sreen

ASR | Asymmetric Solid Reflector (See last page for finish options)

☐ **CT** | Cut-Off Tube (See last page for finish options)









Standard Finishes

The colors shown are representative. Their actual appearance may vary due to differences in display settings. You can request color chips by emailing contact@spilighting.com. Please note, finishes may not be available in all configurations.

Paint Colors

PT01	PT51	PT02	PT04	PT11
RAL9003 Signal White (Gloss)	Matte White (Textured)	White (Textured)	RAL9001 Cream (Textured)	Black (Textured)

Anodized

AN01	AN11	
Anodized Satin	Black Matte Anodized	
	Aluminum	

Metallic Paint Colors

PT22	PT48	PT28	PT49	PT32
Platinum (Metallic Gloss)	Brass (Metallic Textured)	Dark Stainless (Metallic Gloss)	Bronze (Metallic Textured)	Dark Bronze (Metallic Gloss)
PT46				
Aluminum (Metallic Textured)				

Specialty Finishes



More RAL®, Pantone®, and custom finishes are available upon request. Setup fee and additional lead time applies. Call factory for details.