

Tryg Wall - Indirect

SIW11345 50.00 in

SPILIGHTING

PROJECT DETAILS

JOB NAME:

TYPE:

NOTES:

DESCRIPTION

Tryg, a low profile LED fixture, offers a unique design and durability suitable for any project. Its creative design acts as an efficient heat sink, maximizing output and life by allowing the LEDs to operate at an optimal temperature. Tryg is suitable for a variety of applications, and its flexible design lends itself to customization and modification.

FEATURES & BENEFITS

- All visible fasteners are flush mounted, providing a clean design
- Locks in desired orientation for precise fixture alignment
- Anodized finish provides optimal thermal effectiveness and durable corrosion protection
- Versatile design allows fixture to be mounted in any orientation
- Handcrafted in USA

SPECIFICATIONS

- **LIGHT SOURCE:** White LED light engine
- **CRI:** 80+ or 90+
- **LUMEN MAINTENANCE:** L80 = >60,000 Hrs at 38°C ambient temperature
- **EFFICACY:** 82 lm/W delivered
- **CCT:** 2700K, 3000K, 3500K, 4000K, 5000K
- **DRIVER:** Includes remote Class 2 power supply and enclosure. 36" lead length standard; black power cord standard unless otherwise specified.
- **DIMMING:** 0-10V controls standard to 1%
- **CONTROLS:** Contact factory for control options (e.g., Lutron Athena, Current NX, nLight, Enlighted, Encelium, Wattstopper, WaveLinx, or Casambi)
- **EMERGENCY:** Remote battery option is provided with 10W Constant Power Battery back-up, providing 90 Minutes of Emergency operation. Contact factory for other Emergency options.
- **DIFFUSER:** Optical grade clear acrylic lens optimizes performance
- **CONSTRUCTION:** Extruded aluminum construction provides




EMR

durable protection for internal components and is recyclable

- **FINISH:** Housing available in anodized finishes only. Mounting components painted to match.
- **MODIFICATIONS:** Consult factory for all modification requests; including static LED colors
- **APPROVALS:** ETL listed to UL standards (US & Canada) for use in damp locations; not recommended for exterior applications

DIMENSIONS

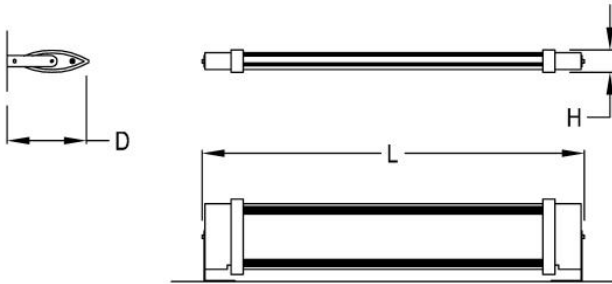

| H | D | L |
|--------|--------|--------|
| 1.4 in | 5.5 in | 50 in |
| 3.6 cm | 14 cm | 127 cm |

Mounting Weight
Approximate: 25 lb (12 kg)

CONFIGURATOR

To configure your spec sheet online, go to www.spilighting.com/SIW11345. Not all options are available in all configurations; consult factory for details.

Required Field *

| Catalog | Light Source* | Primary Finish* | Voltage* | Lamp Options* | CRI* | Emergency | Color Accents | Options |
|----------|---------------|-----------------|----------|---------------|------|-----------|---------------|---------|
| SIW11345 | | | | | | | | |
| | | | | | | | Finish: | |
| | A | | B | C | D | E | F | G |

A - LIGHT SOURCE *

Alternative wattages available upon request.

- ☐ **L16W** | White 16W LED Light Engine | Delivered Lumens: 1,314
- ☐ **L28W** | White 28W LED Light Engine | Delivered Lumens: 2,299
- ☐ **L56W** | White 56W LED Light Engine | Delivered Lumens: 4,598

See last page for finish options

B - VOLTAGE *

- ☐ **120-277V** | Universal Voltage

C - LAMP OPTIONS *

Apply multiplier from chart for delivered lumens at other CCT's and CRI's.

- ☐ 2700K | 2700K CCT
- ☐ 3000K | 3000K CCT
- ☐ 3500K | 3500K CCT
- ☐ 4000K | 4000K CCT
- ☐ 5000K | 5000K CCT

| | 80 CRI | 90 CRI |
|-------|--------|--------|
| 2700K | 1.00 | 0.84 |
| 3000K | 1.00 | 0.84 |
| 3500K | 1.00 | 0.84 |
| 4000K | 1.00 | 0.84 |
| 5000K | 1.00 | 0.84 |

D - CRI *

- ☐ DF_80 | (default)
- ☐ 90

E - EMERGENCY

10W, Constant Power Battery Back-up, with 90 minutes of emergency operation. EMR includes damp location enclosure for Battery back-up.

- ☐ EMR | Emergency Battery Remote

F - COLOR ACCENTS

CA01 available to specify a Color Accent for the narrow band between end cap and extrusion.

- ☐ CA01 | Color Accent (See last page for finish options)



G - OPTIONS

- ☐ F | Fusing

Standard Finishes

The colors shown are representative. Their actual appearance may vary due to differences in display settings. You can request color chips by emailing contact@spilighting.com. Please note, finishes may not be available in all configurations.

Paint Colors

| | | | | |
|---|--|---|---|---|
| PT01 RAL9003 Signal White (Gloss) | PT51 Matte White (Textured) | PT02 White (Textured) | PT04 RAL9001 Cream (Textured) | PT67 RAL7044 Silk Grey (Textured) |
| PT53 RAL7035 Light Grey (Textured) | PT54 RAL7037 Dusty Grey (Textured) | PT55 RAL7012 Basalt Grey (Textured) | PT56 RAL7016 Anthracite Grey (Textured) | PT11 Black (Textured) |
| PT57 RAL1015 Light Ivory (Textured) | PT58 RAL8004 Copper Brown (Textured) | PT59 RAL6021 Pale Green (Textured) | PT60 RAL1019 Grey Beige (Textured) | PT61 RAL7006 Beige Grey (Textured) |
| PT62 RAL1003 Signal Yellow (Textured) | PT63 RAL3001 Signal Red (Textured) | PT64 RAL6001 Emerald Green (Textured) | PT65 RAL5005 Signal Blue (Textured) | PT66 RAL5003 Sapphire Blue (Textured) |

Anodized

| | |
|-------------------------|-------------------------------|
| AN04 Anodized | AN08 Anodized Black |
|-------------------------|-------------------------------|

Metallic Paint Colors

| | | | | |
|---|--|--|---|---|
| PT22 Platinum (Metallic Gloss) | PT48 Brass (Metallic Textured) | PT28 Dark Stainless (Metallic Gloss) | PT49 Bronze (Metallic Textured) | PT32 Dark Bronze (Metallic Gloss) |
| PT46 Aluminum (Metallic Textured) | | | | |

Specialty Finishes



More RAL®, Pantone®, and custom finishes are available upon request. Setup fee and additional lead time applies.Call factory for details.