

Darby - 24"

AIP11431 24.00 in

SPILIGHTING

PROJECT DETAILS

JOB NAME:

TYPE:

NOTES:

DESCRIPTION

Fill your space with beauty and light. Darby is a tiered, drum shaped pendant that can be painted to match any décor. Specify it with a direct/indirect distribution that adds light to the ceiling plane or choose direct-only depending on the application. Available in 24" and 36" diameters, Darby is a great choice for dining halls, ballrooms, foyers, and other open spaces. Hang it in arrays or cluster pendants for a dramatic effect.

FEATURES & BENEFITS


- Elegant multi-tiered styling
- Optional uplight component helps eliminate the "cave effect"
- Handcrafted in USA

SPECIFICATIONS

- **LIGHT SOURCE:** White LED light engine
- **CRI:** 80+ (contact factory for 90+)
- **LUMEN MAINTENANCE:** L70 = >50,000 Hrs.
- **CCT:** 3000K, 3500K, or 4000K
- **DRIVER:** Integral Class 2 power supply standard
- **DIMMING:** 0-10V controls standard to 1% on LED light engines
- **CONTROLS:** Contact factory for control options (e.g., Lutron Athena, Current NX, nLight, Enlighted, Encelium, Wattstopper, WaveLinx, or Casambi)
- **LENS:** Top lens and bottom lens standard with any LED module
- **CONSTRUCTION:** Formed metal construction provides durable protection for internal components and is recyclable
- **FINISH:** Choose from 26 standard thermoset polyester powder coat paint colors. RAL®, Pantone®, or custom finishes available upon request.
- **MODIFICATIONS:** Consult factory for all modification requests
- **APPROVALS:** ETL listed to UL standards (US & Canada) for use in damp locations; not recommended for exterior applications



DIMENSIONS

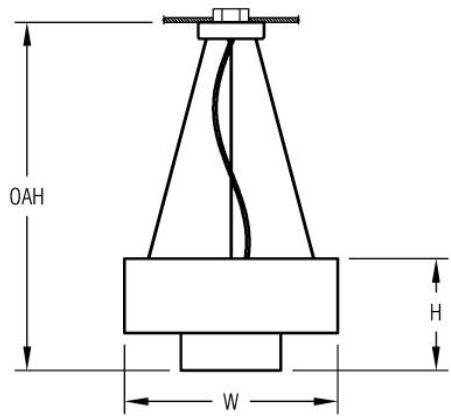

W	H	OAH
24 in	13.5 in	36 in
61 cm	34.3 cm	91.4 cm
Mounting Weight		
Approximate: 50 lb (23 kg)		

CONFIGURATOR

To configure your spec sheet online, go to www.spilighting.com/AIP11431. Not all options are available in all configurations; consult factory for details.

Required Field *

Catalog	Light Source*	Primary Finish*	Voltage*	Lamp Options*	CRI	Mounting*	Other Than Standard Options
AIP11431							
	A		B	C	D	E	F

A - LIGHT SOURCE *

To ensure color consistency, SPI uses precise bin selection and strict quality processes to maintain a 3-step (MacAdam) SDCM on all white LED lampings. Published LED luminaire wattages are calculated using a typical power supply efficiency of 88%; exact wattages may vary based on application. Alternative wattages available upon request.

- ☐ **L50W**¹ | Direct Only - White 50W LED Light Engine | Delivered Lumens: 3,000
- ☐ **L57W** | Direct/Indirect - White 57W LED Light Engine | Delivered Lumens: 3,420
- ☐ **L100W**¹ | Direct Only - White 100W LED Light Engine | Delivered Lumens: 6,000
- ☐ **L115W** | Direct/Indirect - White 115W LED Light Engine | Delivered Lumens: 6,840

See last page for finish options

¹ Contact factory for photometrics

B - VOLTAGE *

- ☐ **120-277V** | Universal Voltage

C - LAMP OPTIONS *

Delivered lumens shown are at 4000K CCT; apply multiplier for delivered lumens at other CCT.

- ☐ 2700K | 2700K CCT
- ☐ 3000K ² | 3000K CCT
- ☐ 3500K ³ | 3500K CCT
- ☐ 4000K | 4000K CCT
- ☐ 5000K | 5000K CCT

² Apply .95 multiplier for delivered lumens

³ Apply .97 multiplier for delivered lumens

D - CRI

- ☐ 90
- ☐ 80 | (default)

E - MOUNTING *

Mounts to standard 4" octagonal junction box. Additional mounting structure and hardware required (by others). Field adjustable aircraft cables allow the fixture to be mounted at an application appropriate height (up to OAH).

- ☐ DF_AC | Aircraft cable and power cord (default)

F - OTHER THAN STANDARD OPTIONS

Specify overall height required from ceiling to the bottom of the fixture.

OAH | Pendant suspension length other than standard

Length:

Standard Finishes

The colors shown are representative. Their actual appearance may vary due to differences in display settings. You can request color chips by emailing contact@spilighting.com. Please note, finishes may not be available in all configurations.

Paint Colors

PT01 RAL9003 Signal White (Gloss)	PT51 Matte White (Textured)	PT02 White (Textured)	PT04 RAL9001 Cream (Textured)	PT67 RAL7044 Silk Grey (Textured)
PT53 RAL7035 Light Grey (Textured)	PT54 RAL7037 Dusty Grey (Textured)	PT55 RAL7012 Basalt Grey (Textured)	PT56 RAL7016 Anthracite Grey (Textured)	PT11 Black (Textured)
PT57 RAL1015 Light Ivory (Textured)	PT58 RAL8004 Copper Brown (Textured)	PT59 RAL6021 Pale Green (Textured)	PT60 RAL1019 Grey Beige (Textured)	PT61 RAL7006 Beige Grey (Textured)
PT62 RAL1003 Signal Yellow (Textured)	PT63 RAL3001 Signal Red (Textured)	PT64 RAL6001 Emerald Green (Textured)	PT65 RAL5005 Signal Blue (Textured)	PT66 RAL5003 Sapphire Blue (Textured)

Metallic Paint Colors

PT22 Platinum (Metallic Gloss)	PT48 Brass (Metallic Textured)	PT28 Dark Stainless (Metallic Gloss)	PT49 Bronze (Metallic Textured)	PT32 Dark Bronze (Metallic Gloss)
PT46 Aluminum (Metallic Textured)				

Specialty Finishes



More RAL®, Pantone®, and custom finishes are available upon request. Setup fee and additional lead time applies.Call factory for details.