SPI LIGHTING

MICRO MAX DUPLEX

9000 Lumens | IP65 | Direct Soft Optics



FEATURES

Narrow and wide flood, asymmetric optics

Up to 4500lm in either direction

Soft direct optic available

Smooth light distribution for clean facade lighting and wall washing

4” x 9”x 8”

5000 hour salt spray tested

ADA compliant

A true asymmetric with high-efficiency optics

Efficacy up to 125 lm/W


Handcrafted in USA



ADA EMR NAT IP65 MADE IN USA BABA COMPLIANT

MICROMAX DUPLEX

BEAM SPREAD

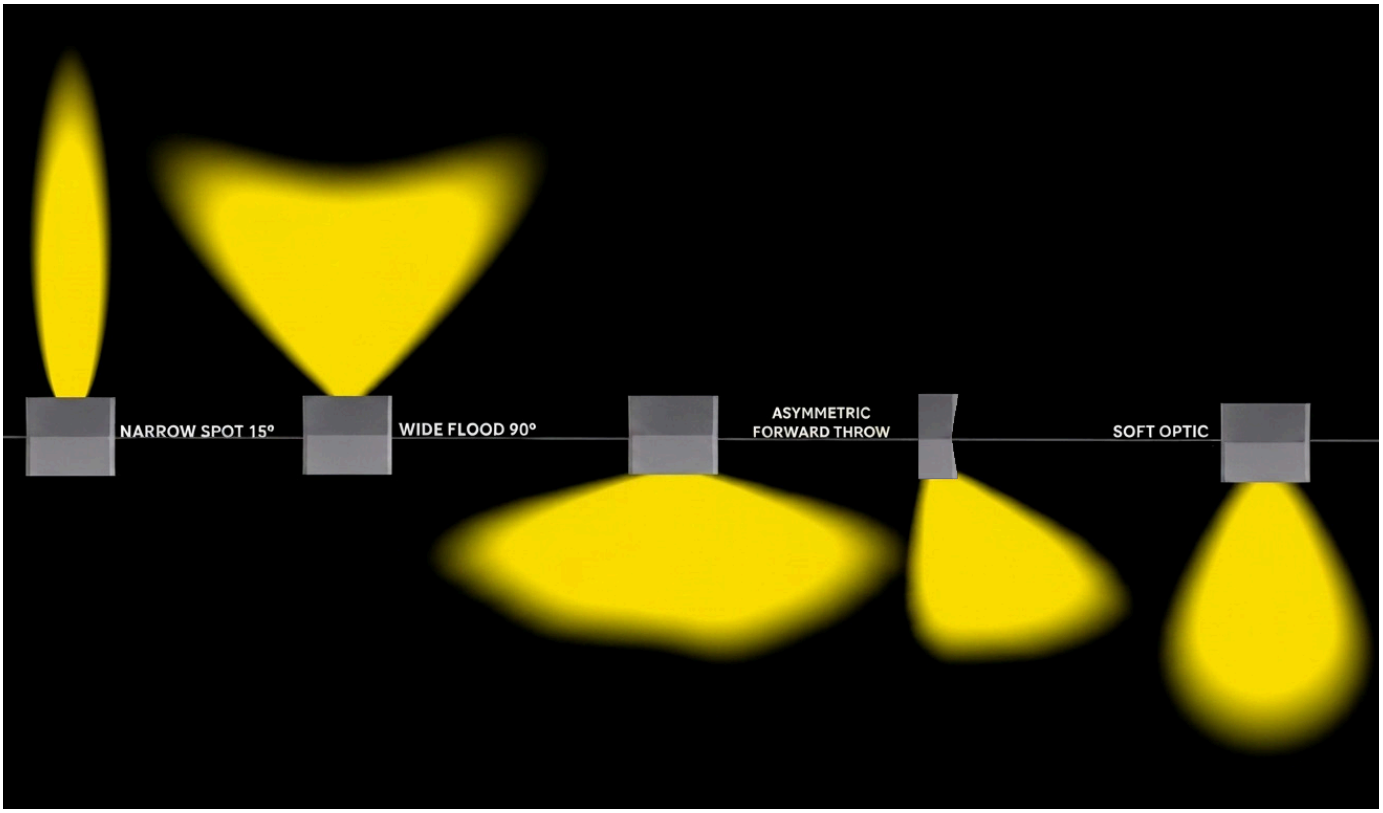

LUMEN DATA

Catalog ID	Orientation	Wattage	Delivered Lumens
12502	Indirect	22	2500
	Indirect	35	4500
	Direct	22	2500
	Direct	35	4500
	Direct (Soft)	10	1000
	Direct (Soft)	22	2000