

NOVATO 2" LINES + ARCS




SPILIGHTING
www.spilighting.com

ILLUMINATION SHAPED BY YOUR IMAGINATION

This revolutionary modular system of luminous lines empowers you to create an infinite array of designs with ease, using all standard products.

Get creative with crisp linear runs, precise angles, flowing curves, and sweeping elevation changes. There's no limit to what you can design with these architectural building blocks of light.



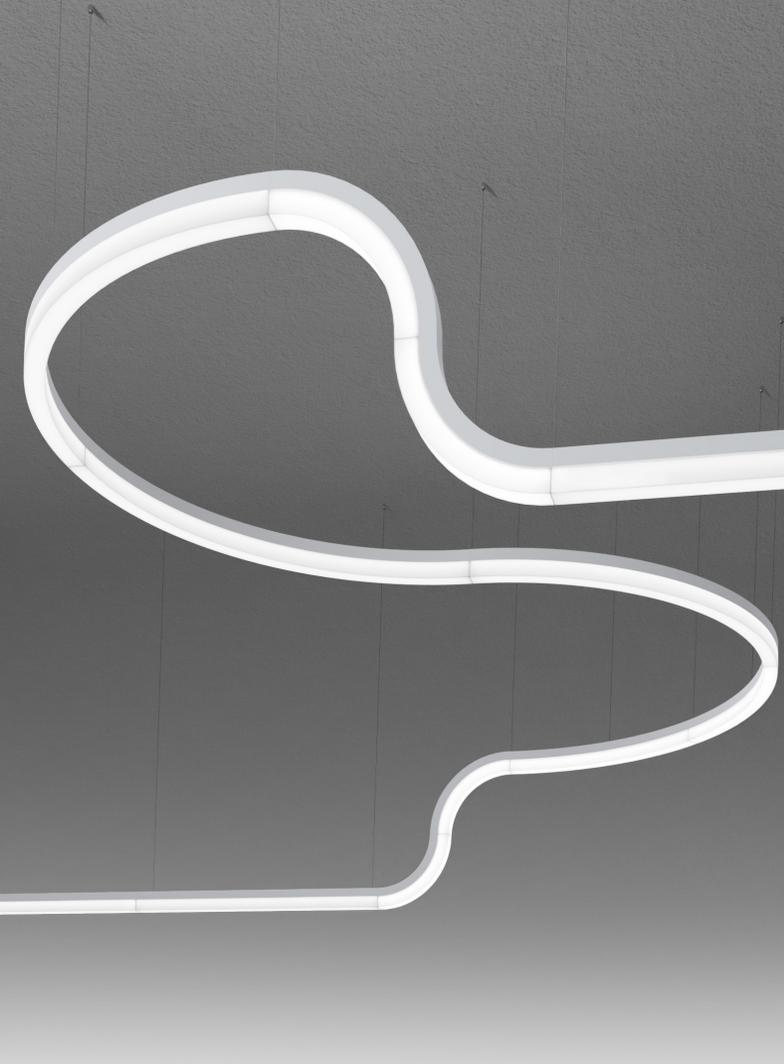


ART + PERFORMANCE

- Sleek 2" x 2" luminous cross-section
- Smooth, continuous lines of light
- Up to 1,135 lumens per foot
- Luminous on three sides, with a 70% direct/30% indirect distribution
- Integral power supply channel with easy daisy chain wiring
- Up to 550' of continuous light with just one power drop

LINES

Crisp, clean lines with fully luminous ends

2' to 8' lengths cover a wide range of project needs




Catalog ID	Size	Wattage	Delivered Lumens*
AIP12234	2'	10	1,068
		20	2,136
	3'	16	1,709
		32	3,418
	4'	21	2,243
		42	4,486
	5'	26	2,777
		52	5,554
	6'	32	3,418
		64	6,835
	7'	36	3,845
		73	7,796
	8'	42	4,486
		85	9,078

Power drop kit required for each continuous run (CPS12238)

ARCS

Smooth, flowing curves in seven standard sizes

Custom radii available; contact factory

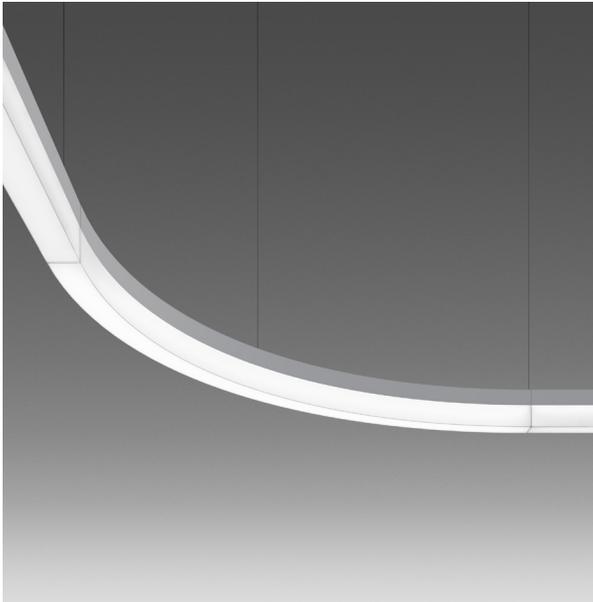


Catalog ID	Size	Wattage	Delivered Lumens
AIP12235	1' - 90° arc	8	854
		15	1,602
	2' - 90° arc	15	1,602
		30	3,204
	3' - 90° arc	24	2,563
		48	5,126
	4' - 45° arc	16	1,709
		32	3,418
	5' - 45° arc	20	2,136
		40	4,272
	6' - 45° arc	24	2,563
		48	5,126
	8' - 45° arc	32	3,418
		64	6,835

Power drop kit required for each continuous run (CPS12238)

ELEVATION CHANGE

Take your design up a level with this sweeping transition

The 24" elevation change is fully luminous

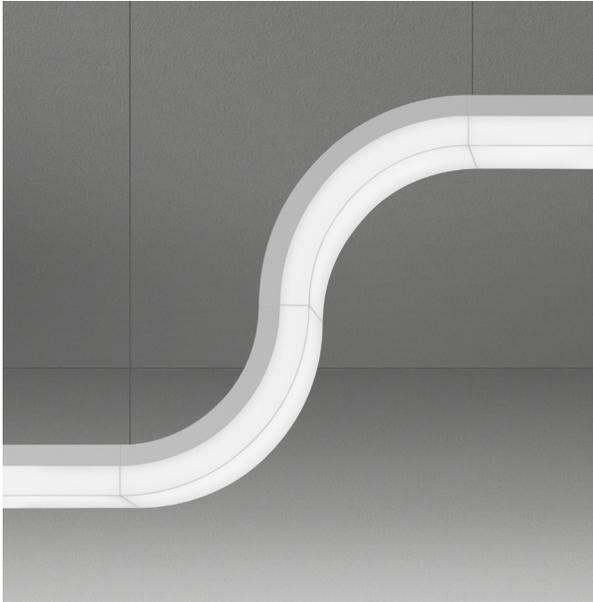


Catalog ID	Size	Wattage	Delivered Lumens
AIP12236	2'	15 31	1,602 3,311

Power drop kit required for each continuous run (CPS12238)

CONNECTORS

Turn corners, create shapes, and make patterns with ease using five standard connectors

Fully luminous with no breaks in light

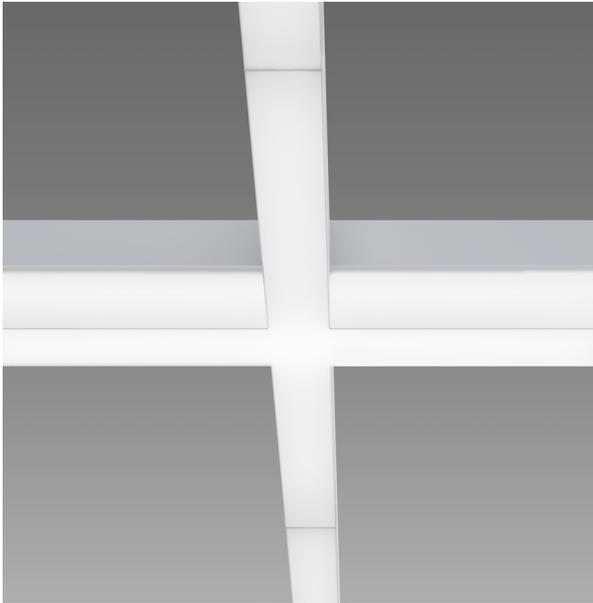

Catalog ID	Type	Wattage	Delivered Lumens
AIP12237	+	20	2,136
		40	4,272
	120° V	10	1,068
		20	2,136
	120° Y	15	1,602
		30	3,204
	L	10	1,068
		20	2,136
	T	15	1,602
		30	3,204

Power drop kit required for each continuous run (CPS12238)

EXPLORE MORE CONFIGURABLE SYSTEMS FROM SPI LIGHTING



ZYNN 2" LINES + ARCS

Sleek 2" x 3" profile
Up to 960 lm/ft
Direct



NOVATO LINES + ARCS

5" x 5" luminous cross-section
Up to 1,055 lm/ft
Direct/Indirect