

BLWI Beam Linear LED

JOB NAME

TYPE

Wall


Integral Power Supply




Beam Linear LED

Beam delivers quality illumination in an award-winning fixture. It's ultra-slim 1" housing blends into any environment, and this model features an integral power supply. Mount it individually or configure linear runs. Its standard 18" projection can be shortened to meet ADA requirements. Beam's multiple shielding options and four sizes make this low-profile fixture adaptable to many applications. The family includes wall and ceiling mounted luminaires and is ETL damp location listed.

Optical Distribution




Run Sections and Projections

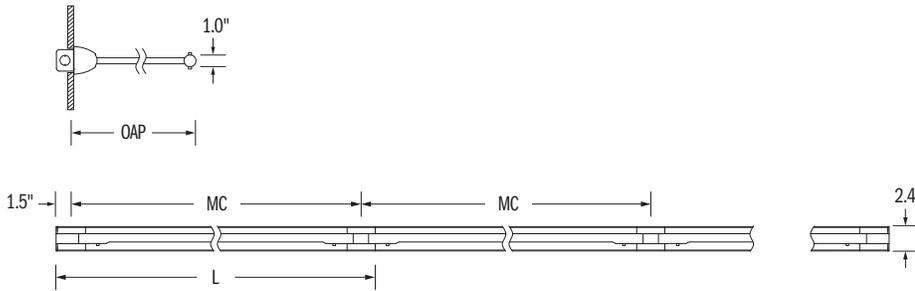


Shielding Options


Fixture shown with 18" overall projection.



APS Asymmetric Perforated Screen



SPS Symmetric Perforated Screen



PLS Perforated Lamp Screen

Dimensions

	MOUNTING CENTER	SINGLE FIXTURE LENGTH
MODULE	MC	L1
029	29.0"	32.0"
041	41.0"	44.0"
053	53.0"	56.0"
065	65.0"	68.0"

Mountings



SJB Surface Mount with Standard J-Box Cover **SMT** Surface Mount

