Wall


Remote Ballast



Zynn Linear LED


Zynn delivers quality illumination in a small fixture. It has the versatility to be mounted on the wall or ceiling. Its standard overall projection is 6", 12", or 18", and is offered with remote power supply. Zynn's ETL damp location listing enable this low-profile fixture to adapt to many applications.

Optical Distribution




Single Fixture


SBC Switch-Box Cover and Stem



LBC J-Box Cover and Stem




SMT Surface Mount



Run Section and Projection

SBC Switch-Box Cover and Stem



Dimensions

| | MOUNTING CENTER | SINGLE FIXTURE LENGTH |
|----------------|--------------------|--------------------------|
| | MC | L |
| SINGLE FIXTURE | 47.5" | 51.9" |
| RUN | 48.0" | 51.9" |


Specifications:

- Extruded aluminum construction provides durable protection for internal INSTALLATION NOTES: During installation the contractor is components and is recyclable.
- External fasteners are flush mounted, providing a clean design.
- Available in anodized finishes with some parts painted to match. Anodized finish provides optimal thermal effectiveness and durable corrosion protection.
- · Lamp body can be rotated up to 330° for application specific aiming.
- SPI Lighting uses strict quality guidelines in LED selection to ensure the white LEDs we use meet or exceed ANSI Binning Standards (ANSI C78.377).
- responsible to use actual fixtures to ensure accurate mounting centers from one fixture to the next along the length of the linear run.
- Max distance to the driver is 15'. For extended distances, contact factory.
- RELATED LINKS: LED Power Supplies (24V DC) "Designed to be LED

Technical Notes:

- ETL listed to UL standards (US and Canada) for use in damp locations. Not recommended for exterior applications.
- L70 life = 50,000+ hours.



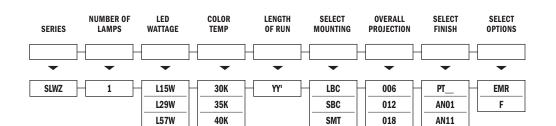

Delivered Lumens

| L15W | L28W | L57W |
|------|------|------|
| 1301 | 2514 | 4942 |

Mountings and Options







LBC J-Box Cover and Stem

SBC Switch-Box Cover and Stem SMT Surface Mount

Code Definitions

| .AMPIN | IG | MOUNTING | PROJECTIONS | FINISHES (See Color Chart for Details) | OPTIONS |
|--------|------------------|----------------------|------------------|--|------------------------------|
| .15W | White LED Module | LBC J-Box Cover | 006 6.0" | PT_ Powder Coat Finish | EMR Emergency Ballast Remote |
| .29W | White LED Module | SBC Switch-Box Cover | 012 12.0" | AN01 Anodized Satin Aluminum | F Fusing |
| .57W | White LED Module | SMT Surface Mount | 018 18.0" | AN11 Anodized Satin Black | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |