

Harbor Exterior - Medallion

AEW8071 22.00 in

JOB NAME:

TYPE:

NOTES:

DESCRIPTION

Accenting the Harbor half cylinder sconce are two 1/4" x 1/2" horizontal bars along with a decorative medallion. The clean lines of this exterior sconce are perfect for multiple applications including offices, retail buildings, and health care facilities. Choose from a palette of both painted and metal finishes.

FEATURES & BENEFITS


- Opal top and bottom lens protects fixture and provides uniform illumination
- Two lens removal options provide application flexibility
- Interior family fixtures available to carry a consistent lighting design throughout a project
- Handcrafted in USA

SPECIFICATIONS

- **LIGHT SOURCE:** White LED light engine
- **CRI:** 90+HE
- **LUMEN MAINTENANCE:** L70 = >50,000 Hrs.
- **CCT:** 2700K, 3000K, 3500K, 4000K, 5000K
- **DRIVER:** Integral Class 2 power supply standard
- **DIMMING:** 0-10V controls standard to 1% on LED light engines
- **CONTROLS:** Contact factory for control options (e.g., Lutron Athena, Current NX, nLight, Enlighted, Encelium, Wattstopper, WaveLinx, or Casambi)
- **EMERGENCY:** Remote battery option is provided with 10W Constant Power Battery back-up, providing 90 Minutes of Emergency operation. Contact factory for other Emergency options.
- **DIFFUSER:** Formed opal acrylic lens
- **MOUNTING:** Mounts to standard 4" octagonal junction box
- **MODIFICATIONS:** Consult factory for all modification requests
- **APPROVALS:** ETL listed to UL standards (US & Canada) for use in wet locations



DIMENSIONS

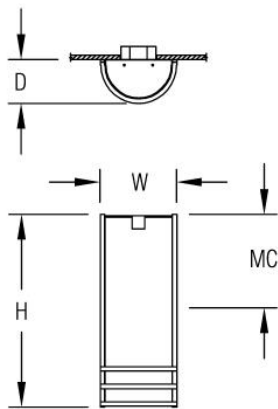

| | | | |
|----------------------------|----------|----------|-----------|
| W | H | D | MC |
| 9 in | 22 in | 5 in | 11 in |
| 22.9 cm | 55.9 cm | 12.7 cm | 27.9 cm |
| Mounting Weight | | | |
| Approximate: 25 lb (12 kg) | | | |

CONFIGURATOR

To configure your spec sheet online, go to www.spilighting.com/AEW8071. Not all options are available in all configurations; consult factory for details.

Required Field *

| | | | | | | | | |
|--------------------|---------------|-----------------|----------|---------------|-----|-----------|-----------|--------------------|
| Catalog AEW8071 | Light Source* | Primary Finish* | Voltage* | Lamp Options* | CRI | Emergency | End Caps* | Lens Installation* |
| | | | | | | | Finish: | Finish: |
| | A | | B | C | D | E | F | G |

A - LIGHT SOURCE *

To ensure color consistency, SPI uses precise bin selection and strict quality processes to maintain a 3-step (MacAdam) SDCM on all white LED lampings. Published LED luminaire wattages are calculated using a typical power supply efficiency of 88%; exact wattages may vary based on application.

- ☐
L22W | White 22W LED Light Engine

Delivered Lumens: 1,501
- ☐
L43W | White 43W LED Light Engine

Delivered Lumens: 3,002
- ☐
Cust_Out |

Lumen Calculator: Enter Lumens or Watts if different than displayed

LU

Min 1518 - Max 2967

W

Min 22.0 - Max 43.0

See last page for finish options

*For requests outside Min-Max range, please contact factory.

B - VOLTAGE *

- ☐ 120-277V | Universal Voltage

C - LAMP OPTIONS *

Apply multiplier from chart for delivered lumens at other CCT's and CRI's.

- ☐ 2700K | 2700K CCT
- ☐ 3000K | 3000K CCT
- ☐ 3500K | 3500K CCT
- ☐ 4000K | 4000K CCT
- ☐ 5000K | 5000K CCT

D - CRI

- ☐ 90+HE | 90+ High Efficacy

E - EMERGENCY


10W, Constant Power Battery Back-up, with 90 minutes of emergency operation. EMR-Damp includes damp location enclosure for Battery back-up. EMR-W/L includes a wet location enclosure for battery back-up.

- ☐ EMR-DAMP | Emergency Battery Remote - Damp Location
- ☐ EMR-W/L | Emergency Battery Remote - Wet Location

F - END CAPS *

Specify Luminous or Solid end cap for bottom only. The top is always luminous.

- ☐ DF_LUM | Luminous (default)
- ☐ SLD | Solid (See last page for finish options)

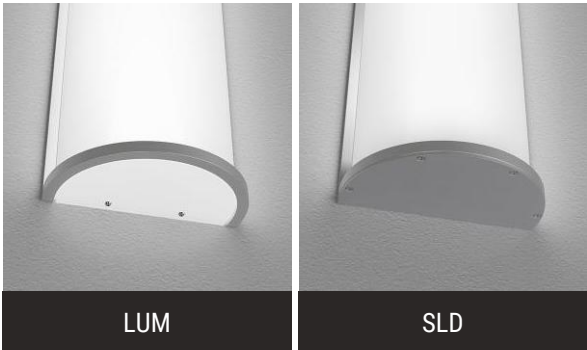


G - LENS INSTALLATION *

INST2 includes ball nuts on vertical bars to remove lens.

- ☐ DF_INST1 | Slides Out (default)
- ☐ INST2 | Pulls Straight Out (See last page for finish options)



INST1



INST2

Standard Finishes

The colors shown are representative. Their actual appearance may vary due to differences in display settings. You can request color chips by emailing contact@spilighting.com. Please note, finishes may not be available in all configurations.

Paint Colors

| | | | | |
|---|--|---|---|---|
| PT01 RAL9003 Signal White (Gloss) | PT51 Matte White (Textured) | PT02 White (Textured) | PT04 RAL9001 Cream (Textured) | PT67 RAL7044 Silk Grey (Textured) |
| PT53 RAL7035 Light Grey (Textured) | PT54 RAL7037 Dusty Grey (Textured) | PT55 RAL7012 Basalt Grey (Textured) | PT56 RAL7016 Anthracite Grey (Textured) | PT11 Black (Textured) |
| PT57 RAL1015 Light Ivory (Textured) | PT58 RAL8004 Copper Brown (Textured) | PT59 RAL6021 Pale Green (Textured) | PT60 RAL1019 Grey Beige (Textured) | PT61 RAL7006 Beige Grey (Textured) |
| PT62 RAL1003 Signal Yellow (Textured) | PT63 RAL3001 Signal Red (Textured) | PT64 RAL6001 Emerald Green (Textured) | PT65 RAL5005 Signal Blue (Textured) | PT66 RAL5003 Sapphire Blue (Textured) |

Brushed Copper

| |
|------------------------------------|
| BCU Brushed Solid Copper |
|------------------------------------|

Metallic Paint Colors

| | | | | |
|---|--|--|---|---|
| PT22 Platinum (Metallic Gloss) | PT48 Brass (Metallic Textured) | PT28 Dark Stainless (Metallic Gloss) | PT49 Bronze (Metallic Textured) | PT32 Dark Bronze (Metallic Gloss) |
| PT46 Aluminum (Metallic Textured) | | | | |

Natural Copper

| |
|------------------------------------|
| CU Distressed Raw Copper |
|------------------------------------|

Brushed Aluminum

| |
|--------------------------------|
| BAL Brushed Aluminum |
|--------------------------------|

Brushed Brass

| |
|-----------------------------------|
| BBR Brushed Solid Brass |
|-----------------------------------|

Polished-Tinted Brass

| | | |
|-------------------------------------|----------------------------------|------------------------------|
| ATBR Antique Tinted Brass | DTBR Dark Tinted Brass | PBR Polished Brass |
|-------------------------------------|----------------------------------|------------------------------|

Polished Plated Brass

| | |
|---|--|
| CPBR Chrome Plated Polished Brass | SNBR Satin Nickel Plated Brass |
|---|--|

Specialty Finishes



More RAL®, Pantone®, and custom finishes are available upon request. Setup fee and additional lead time applies. Call factory for details.