# Vienna - Ceiling

AIC8855 16.00 in

SPILIGHTING PROJECT DETAILS

JOB NAME:

TYPE:

NOTES:

#### DESCRIPTION

Our cone collection offers a look previously not available in the market with high-output optical packages. We've taken difficult geometric volume and created luminous visual comfort and high-output indirect lighting in a contemporary form. The family includes pendant, chandelier, wall-mounted, and ceiling models to illuminate and enhance environments where you are looking for a distinct, strong form and proven optical performance.

#### **FEATURES & BENEFITS**

- Opal acrylic diffuser lens enhances a space with filtered illumination
- Spun metal trim ring adds high-quality, decorative element to fixture
- · Handcrafted in USA

#### **SPECIFICATIONS**

- LIGHT SOURCE: White LED light engine or incandescent
- CRI: 90+HE
- LUMEN MAINTENANCE: L70 = >50,000 Hrs.
- CCT: Available LED color temperatures: 2700K, 3000K, 3500K, 4000K, 5000K
- DRIVER: LED versions feature integral Class 2 power supply standard
- **DIMMING:** 0-10V controls standard to 10% on LED light engines
- CONTROLS: Contact factory for control options (e.g., Lutron Athena, Current NX, nLight, Enlighted, Encelium, Wattstopper, WaveLinx, or Casambi)
- EMERGENCY: Remote battery option is provided with 10W Constant Power Battery back-up, providing 90 Minutes of Emergency operation. Contact factory for other Emergency options.
- **DIFFUSER:** Opal acrylic is standard; matte acrylic and hand painted lenses optional
- **CONSTRUCTION:** Formed metal construction provides durable protection for internal components and is recyclable
- MOUNTING: Aluminum cover fits over a standard 4" octagonal












junction box

- MODIFICATIONS: Consult factory for all modification requests
- APPROVALS: ETL listed to UL standards (US & Canada) for use in damp locations; not recommended for exterior applications

#### **DIMENSIONS**

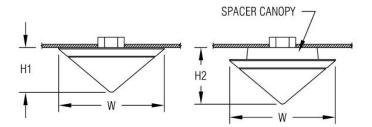

<b>W</b>	<b>H1</b>	<b>H2</b>
16 in	6.7 in	8.7 in
40.6 cm	17 cm	22.1 cm
Mounting V	Weight te: 25 lb (12	kg)

# **CONFIGURATOR**

To configure your spec sheet online, go to <a href="https://www.spilighting.com/AIC8855">www.spilighting.com/AIC8855</a>. Not all options are available in all configurations; consult factory for details.

#### Required Field \*

Catalog	Light Source*	Primary Finish*	Voltage*	Lamp Options*	CRI*	Diffuser*	Emergency	Bowl Options	Canopy	Options
AIC8855										
								Finish:		
	1	A	В	С	D	E	F F	G	Н	ı

## A - LIGHT SOURCE \*

To ensure color consistency, SPI uses precise bin selection and strict quality processes to maintain a 3-step (MacAdam) SDCM on all white LED lampings. Published LED luminaire wattages are calculated using a typical power supply efficiency of 88%; exact wattages may vary based on application.

L29W   White 29W LED Light Eng	gine	Delivered Lumens: 1,476
L14W   White 14W LED Light En	gine	Delivered Lumens: 738
1N60 1   1INC60W/A19		
Cust_Out		
Lumen Calculator: Enter Lum	ens or	Watts if different than displayed
	LU	Min 714 - Max 1479
	W	Min 14.0 - Max 29.0

See last page for finish options



<sup>&</sup>lt;sup>1</sup> Incandescent Lamp(s) Not Included \*For requests outside Min-Max range, please contact factory.

B - VOLTAGE *
<ul> <li>□ 120-277V   Universal Voltage</li> <li>□ 120V <sup>2</sup>   120 Volt</li> </ul>
For incandescent light source only
C - LAMP OPTIONS *
☐ 2700K   2700К ССТ ☐ 3000K   3000К ССТ ☐ 3500K   3500К ССТ ☐ 4000K   4000К ССТ ☐ 5000К   5000К ССТ
O - CRI *
☐ DF_90+HE   90+ High Efficacy
E - DIFFUSER *
□ DF_OA   Opal Acrylic Diffuser Lens (default) □ HP01   Silver Hand Painted Acrylic Diffuser □ HP02   Beige Hand Painted Acrylic Diffuser □ HP03   Amber Hand Painted Acrylic Diffuser □ MA01   Matte Acrylic Diffuser Lens
OA HP01 HP02 HP03 MA01
10W, Constant Power Battery Back-up, with 90 minutes of emergency operation. EMR includes damp location enclosure for Battery back-up.
☐ EMR   Emergency Battery Remote
G - BOWL OPTIONS
FIN   Finial (See last page for finish options)
H - CANOPY
SP   Canopy Spacer

F | Fusing



# **Standard Finishes**

The colors shown are representative. Their actual appearance may vary due to differences in display settings. You can request color chips by emailing <a href="mailto:contact@spilighting.com">contact@spilighting.com</a>. Please note, finishes may not be available in all configurations.

#### **Paint Colors**

PT01 RAL9003 Signal White (Gloss)	PT51 Matte White (Textured)	PT02 White (Textured)	PT04 RAL9001 Cream (Textured)	PT67 RAL7044 Silk Grey (Textured)
PT53 RAL7035 Light Grey (Textured)	PT54 RAL7037 Dusty Grey (Textured)	PT55 RAL7012 Basalt Grey (Textured)	PT56 RAL7016 Anthracite Grey (Textured)	PT11 Black (Textured)
PT57 RAL1015 Light Ivory (Textured)	PT58 RAL8004 Copper Brown (Textured)	PT59 RAL6021 Pale Green (Textured)	PT60 RAL1019 Grey Beige (Textured)	PT61 RAL7006 Beige Grey (Textured)
PT62 RAL1003 Signal Yellow (Textured)	PT63 RAL3001 Signal Red (Textured)	PT64 RAL6001 Emerald Green (Textured)	PT65 RALS005 Signal Blue (Textured)	PT66 RAL5003 Sapphire Blue (Textured)

#### **Metallic Paint Colors**

PT22	PT48	PT28	PT49	PT32	
Platinum (Metallic Gloss)	Brass (Metallic Textured)	Dark Stainless (Metallic Gloss)	Bronze (Metallic Textured)	Dark Bronze (Metallic Gloss)	
PT46					
Aluminum (Metallic Textured)					

#### **Brushed Aluminum**

BAL	
Brushed Aluminum	

#### **Brushed Brass**



#### **Polished-Tinted Brass**

ATBR	DTBR	PBR
Antique Tinted Brass	Dark Tinted Brass	Polished Brass

### **Plated Steel**

ANST	BBST	CPST	1000	PBST	SNST	
Antique Brass Plated Steel	Brushed Brass Plated Steel	Chrome Plated Steel		Polished Brass Plated Steel	Satin Nickel Steel	
			_			

#### **Polished Plated Brass**

CPBR	1000	SNBR	
Chrome Plated Polished Brass		Satin Nickel Plated Brass	
	_		THE REAL PROPERTY.

# **Specialty Finishes**



More RAL®, Pantone®, and custom finishes are available upon request. Setup fee and additional lead time applies.Call factory for details.

